



# Bridgelux® F90 EB Series™ 1" Cuttable

Product Data Sheet DS537

Lengths: 1206mm


CRI: 90

CCTs: 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K




# Product Feature Map

Bridgelux F90 EB Series 1" cuttable modules are fully engineered devices that provide consistent thermal and optical performance on an engineered mechanical platform. The linear products incorporate several features to simplify design integration and assembly. Please visit [www.bridgelux.com](http://www.bridgelux.com) for more information on the EB Series family of products.

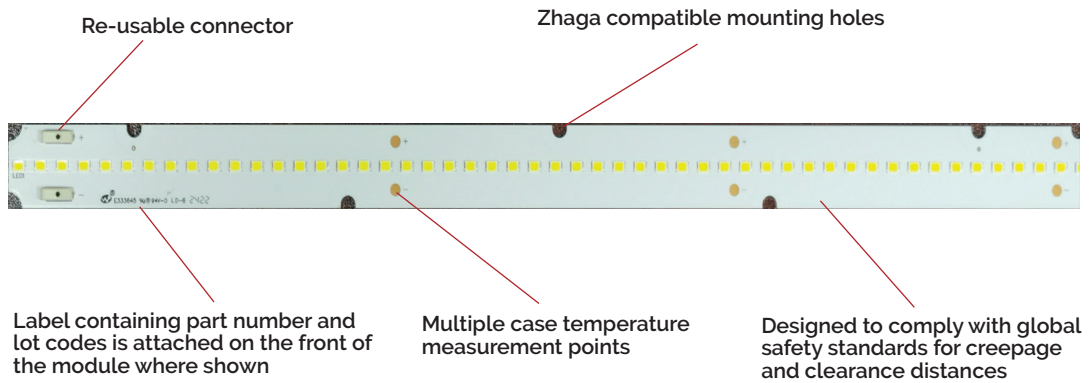

## Product Nomenclature

The part number designation for Bridgelux F90 EB Series 1" Cuttable is explained as follows:

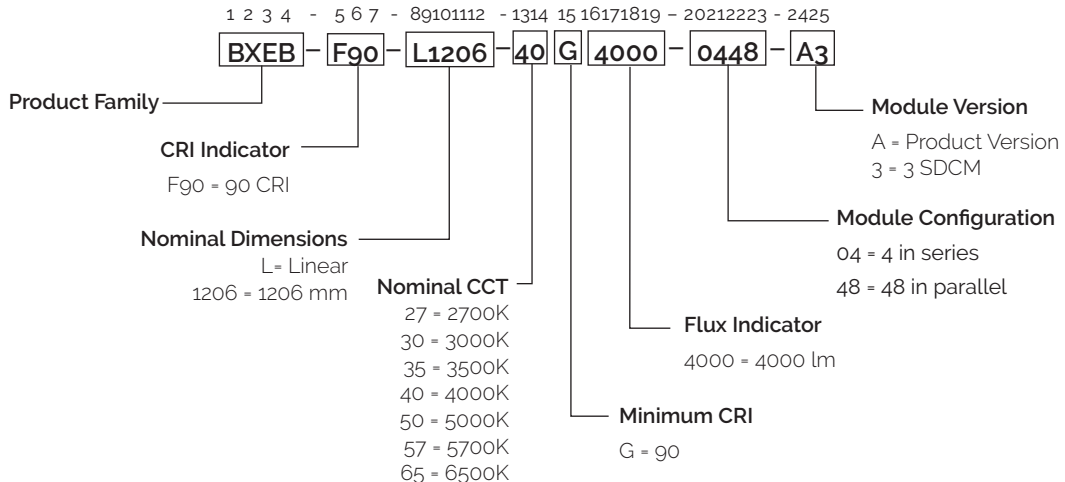

# Product Selection Guide

**Table 1: Selection Guide, Measurement Data (T<sub>c</sub> = 25° C)**

Part Number	Nominal CCT <sup>1</sup> (K)	CRI <sup>2</sup>	Nominal Drive Current (mA)	Forward Voltage (V)	Typical Power (W)	Typical Pulsed Flux <sup>3, 4</sup> (lm)	Typical Efficacy (lm/W)
BXEB-F90-L1206-27G4000-0448-A3	2700	90	716	33	23.6	3820	162
BXEB-F90-L1206-30G4000-0448-A3	3000					4002	169
BXEB-F90-L1206-35G4000-0448-A3	3500					4002	169
BXEB-F90-L1206-40G4000-0448-A3	4000					4184	177
BXEB-F90-L1206-50G4000-0448-A3	5000					4184	177
BXEB-F90-L1206-57G4000-0448-A3	5700					4093	173
BXEB-F90-L1206-65G4000-0448-A3	6500					4093	173

Notes for Table 1:

1. Nominal CCT as defined by ANSI C78.377-2011.
2. CRI Values are minimums.
3. Drive current is referred to as nominal drive current.
4. Products tested under pulsed condition (10ms pulse width) at nominal drive current where T<sub>c</sub> (case temperature) = 25°C. Values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
5. Typical performance values are provided as a reference only and are not a guarantee of performance.
6. Bridgelux maintains a ± 7% tolerance on typical flux measurements

# Performance at Commonly Used Drive Currents

EB series 1" cuttable F90 modules are tested to the specifications shown using the nominal drive currents in Table 1. EB series 1" cuttable F90 modules may also be driven at other drive currents dependent on specific application design requirements. The performance at any drive current can be derived from the current vs. voltage characteristics shown in Figure 1, and the flux vs. current characteristics shown in Figure 2. The performance at commonly used drive currents is summarized in Table 2.

**Table 2: Performance at Commonly Used Drive Currents ( $T_c = 25^\circ \text{C}$ )**

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical $V_f$ (V)	Typical Power (W)	Typical Pulsed Flux <sup>2</sup> (lm)	Typical Efficacy (lm/W)
BXEB-F90-L1206-27G4000-0448-A3	90	476	32.4	15.4	2574	167
		716	33	23.6	3820	162
		956	33.6	32.1	5039	157
		1435	34.6	49.7	7414	149
		1915	35.6	68.2	9664	142
BXEB-F90-L1206-30G4000-0448-A3 BXEB-F90-L1206-35G4000-0448-A3	90	476	32.4	15.4	2697	175
		716	33	23.6	4002	169
		956	33.6	32.1	5279	164
		1435	34.6	49.7	7767	156
		1915	35.6	68.2	10124	149
BXEB-F90-L1206-40G4000-0448-A3 BXEB-F90-L1206-50G4000-0448-A3	90	476	32.4	15.4	2820	183
		716	33	23.6	4184	177
		956	33.6	32.1	5519	172
		1435	34.6	49.7	8120	164
		1915	35.6	68.2	10584	155
BXEB-F90-L1206-57G4000-0448-A3 BXEB-F90-L1206-65G4000-0448-A3	90	476	32.4	15.4	2758	179
		716	33	23.6	4093	173
		956	33.6	32.1	5399	168
		1435	34.6	49.7	7944	160
		1915	35.6	68.2	10354	152

Notes for Table 2:

1. Alternate drive currents are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.

# Absolute Maximum Ratings

**Table 3: Maximum Ratings**

Parameter	Maximum Rating
Storage Temperature	-40°C to +85°C
Operating Case Temperature <sup>2</sup> (T <sub>c</sub> )	85°C
Soldering Temperature	350°C or lower for a maximum of 5 seconds
Maximum Reverse Voltage	Modules are not designed to be driven in reverse bias
	BXEB-F90-L1206-xxG4000-0448-A3
Maximum Drive Current	2000mA

Notes for Table 3:

1. For IEC 62717 requirement, please consult your Bridgelux sales representative.
2. Lumen maintenance (L70) and lifetime predictions are valid for drive current and case temperature conditions used for LM-80 testing as included in the applicable LM-80 test report for the SMDs used in the modules. Contact your Bridgelux sales representatives for LM-80 report.

# Performance Curves

Figure 1: Current vs. Forward Voltage,  $T_c=25^\circ\text{C}$

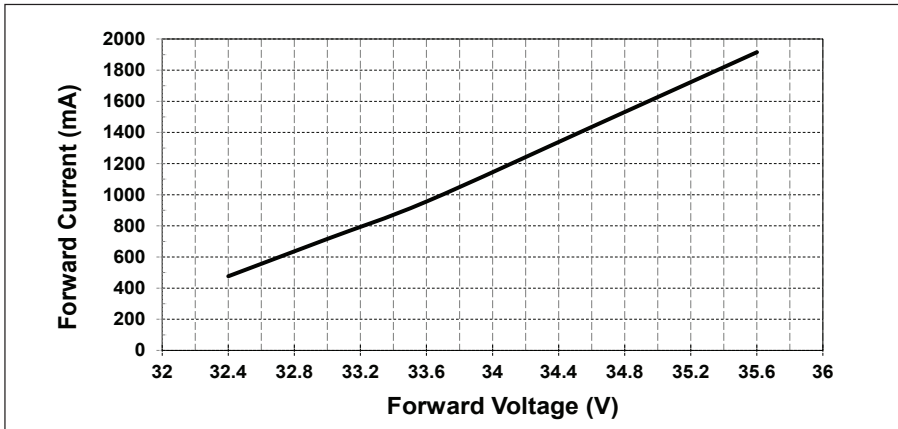


Figure 2: Relative Flux vs. Current,  $T_c=25^\circ\text{C}$



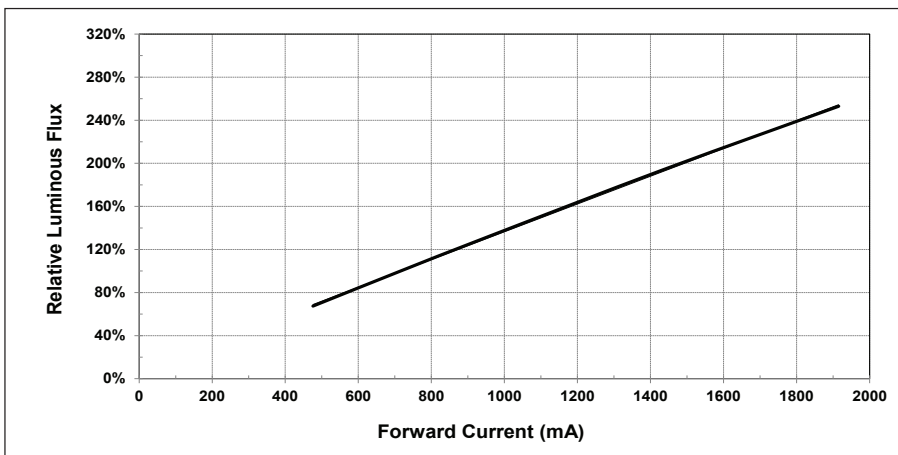


Figure 3: Relative Flux vs. Case Temperature

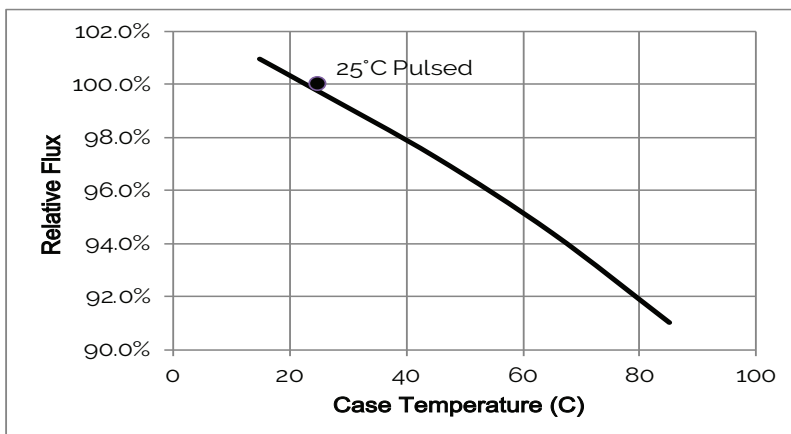

# Typical Radiation Pattern

**Figure 4: Typical Spatial Radiation Pattern**

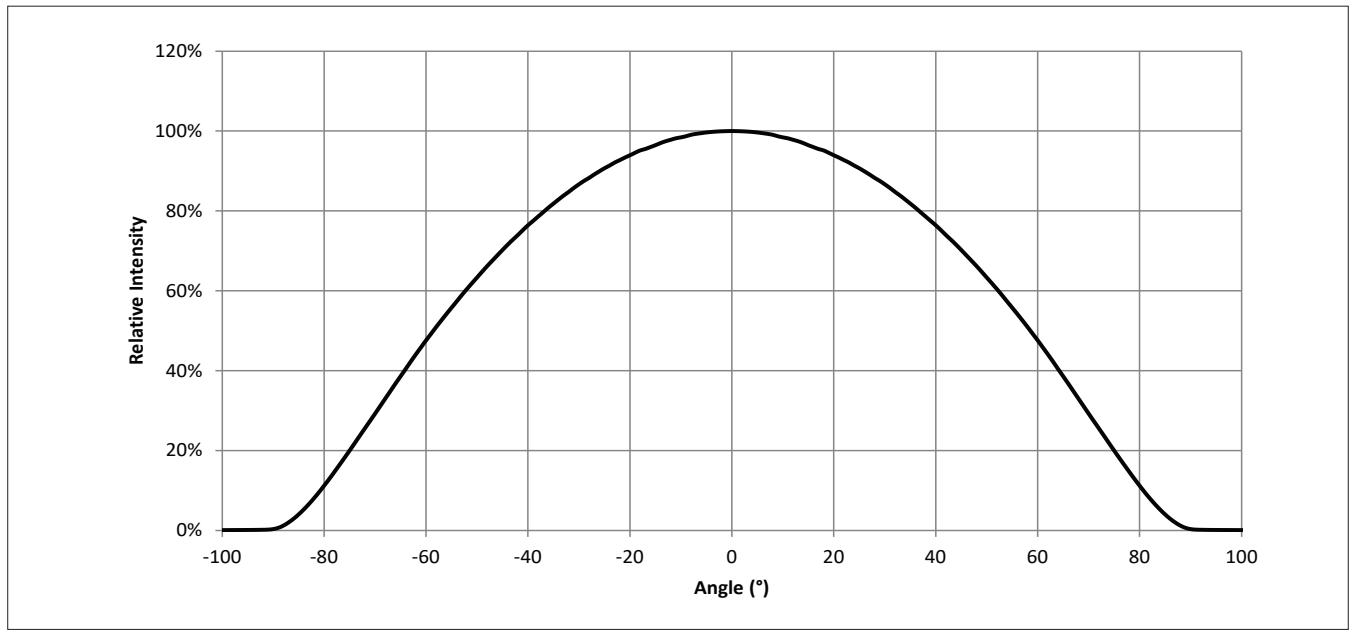


Notes for Figure 4:

1. Typical viewing angle is 120°.
2. The viewing angle is defined as the off axis angle from the centerline where  $I_v$  is  $\frac{1}{2}$  of the peak value.

# Typical Color Spectrum

Figure 5: Typical Color Spectra, 90 CRI

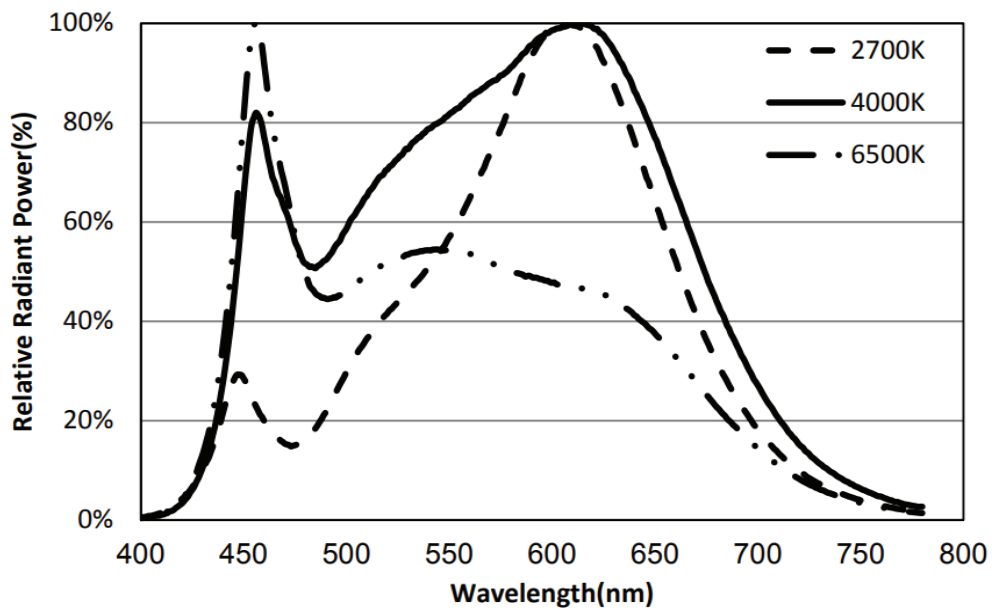


Note for Figure 5:

1. Color spectra measured at nominal current for  $T_c = 25^\circ\text{C}$



# Mechanical Dimensions and Handling Guide

**Figure 6: Drawing Overview for 1120mm**

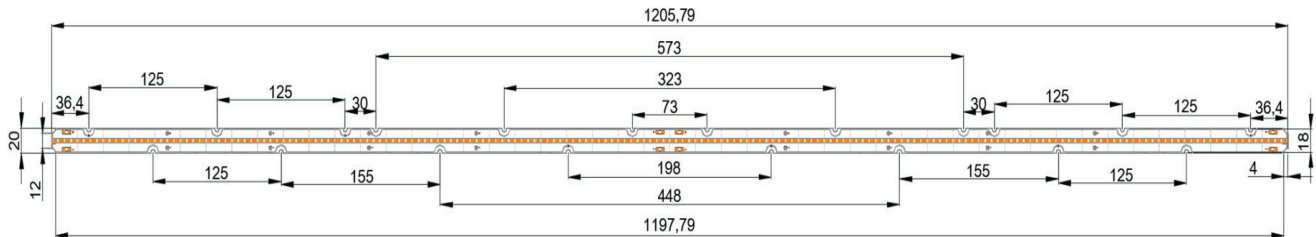

Notes for Figure 6:

1. Solder pads are labeled "+" to denote positive polarity, and "-" to denote negative polarity.
2. Drawing dimensions are in millimeters.
3. Unless otherwise specified, tolerances are  $\pm 0.1$  mm.


**Table 4: Module Dimensions & Connector Wiring**

Parameter	BXEB-F90-L1206-xxG4000-0448-A3
Linear length	1205,79 mm
Linear width	20.0 mm
Overall thickness	6.1 mm
PCB thickness	1.6 mm
Input wire cross-section	18-24 AWG
Wire strip length	7-9 mm

## Handling Guide


- \* Please use antistatic gloves or other ESD protection methods when handling this cuttable board to prevent ESD damage or contamination of LEDs.
- \* All cut lines are located on the back of the LED board. See Figure 7 for the product's backside.
- \* Customers should use proper tools, such as dremel rotary cutting tool, and not use hands when they separate this cuttable board. It is not allowed to bend PCB and touch LED.
- \* Cutting pressure should be applied as close as possible to the separation line. Keep your fingers away from the LEDs as much as possible to avoid damage to the LEDs.
- \* It is very important to follow above guidelines when separating the cuttable board to ensure that the product warranty is not voided.

**Figure 7: Backside Cut Lines of the LED board**



# Color Binning Information

**Figure 8: 3 SDCM Color Bins in CIE 1931 xy Color Space**

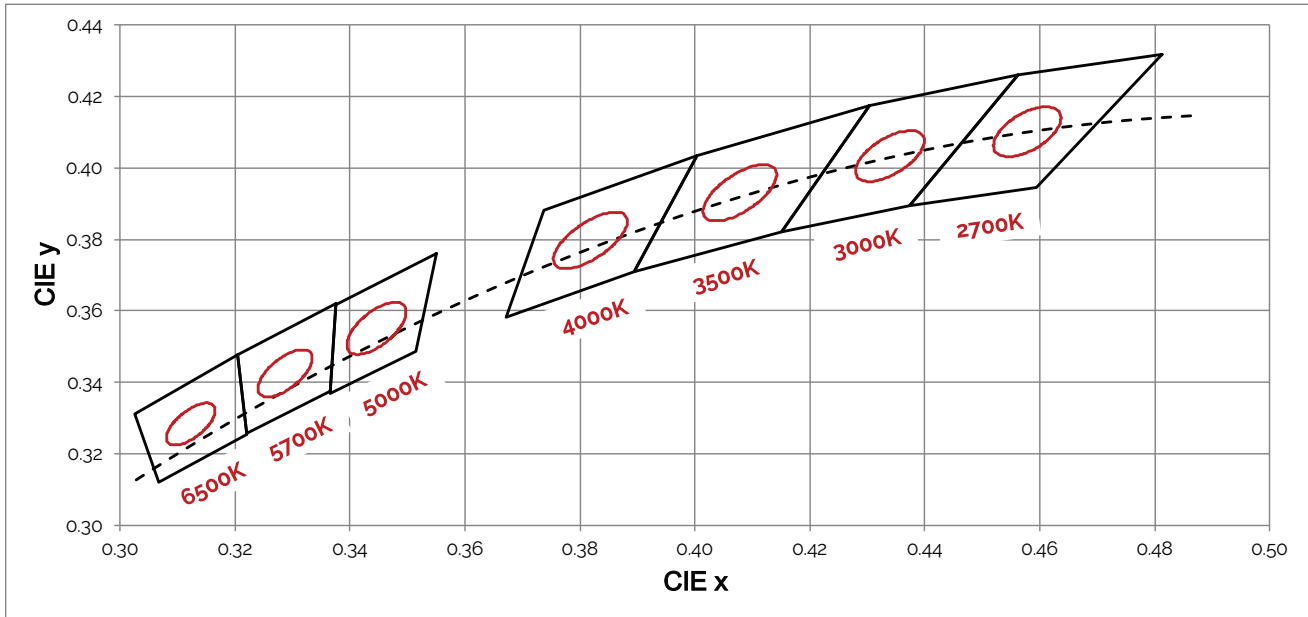

Note for Figure 11:

1. Quadrangular ANSI bins shown for reference only
2. Bridgelux maintains a tolerance of  $\pm 0.007$  on x and y color coordinates in the CIE 1931 color space

**Table 5: Bin Coordinates and Associated Typical CCT**


CCT	Color Consistency	CIE Center Point (x, y)	Corresponding CCT Range
2700K	3 SDCM	(0.458, 0.410)	2651K - 2794K
3000K	3 SDCM	(0.434, 0.403)	2968K - 3136K
3500K	3 SDCM	(0.407, 0.392)	3369K - 3586K
4000K	3 SDCM	(0.382, 0.380)	3851K - 4130K
5000K	3 SDCM	(0.3445, 0.355)	4835K - 5215K
5700K	3 SDCM	(0.329, 0.342)	5490K - 5820K
6500K	3 SDCM	(0.312, 0.328)	6250K - 6745K

Notes for Table 5:

1. Color binning at solder point temperature  $T_{sp}$  of SMDs at 60°C.
2. Bridgelux maintains a tolerance of  $\pm 0.007$  on x and y color coordinates in the CIE 1931 color space

# Packaging and Labeling

**Figure 9: EB Series Packaging and Labeling**

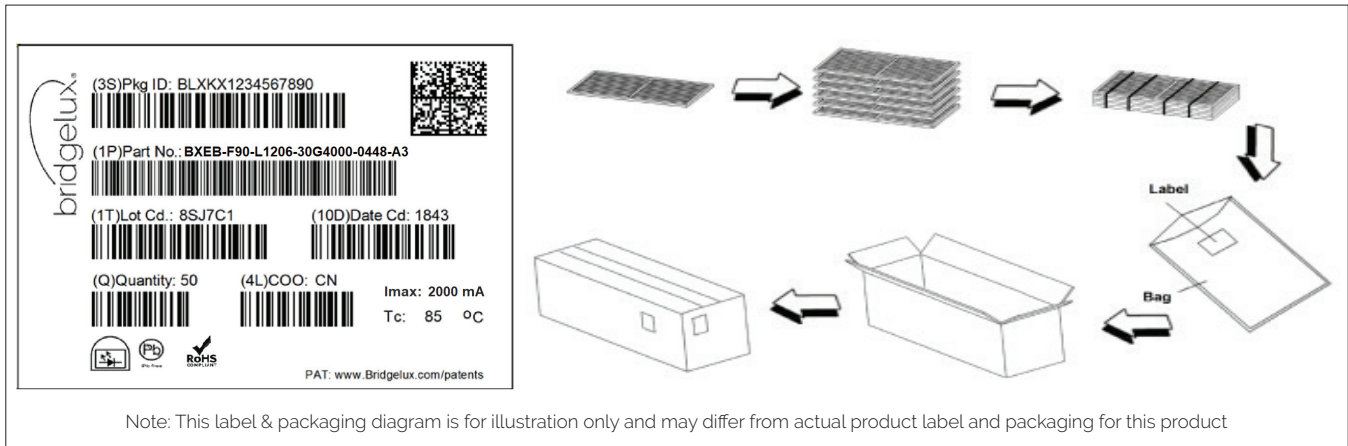

**Table 6**

Box Parameter	L1206 modules
Quantity	100
Dimension	115.9 cm x 19.4 cm x 16.9 cm

**Figure 10: Product Labeling**

Bridgelux EB Series modules contain a label on the front to help with product identification. In addition to the product identification markings, Bridgelux EB Series modules also contain markings for internal Bridgelux manufacturing use only. The image below shows which markings are for customer use and which ones are for Bridgelux internal use only. The Bridgelux internal manufacturing markings are subject to change without notice, however these will not impact the form, function or performance of the module.



EB Series 1" Cuttable F90  
4ft 4000lm 716mA

Customer Use- 2D Barcode  
Scannable barcode provides  
product part number and other  
Bridgelux internal production  
information.

# Design Resources

## Application Notes

Bridgelux has developed a comprehensive set of application notes and design resources to assist customers in successfully designing with the EB Series product family. For a list of resources under development, visit [www.bridgelux.com](http://www.bridgelux.com).

## Optical Source Models

Optical source models and ray set files are available for all Bridgelux products. For a list of available formats, visit [www.bridgelux.com](http://www.bridgelux.com).

## 3D CAD Models

Three dimensional CAD models depicting the product outline of all Bridgelux EB Series LED linears are available in both IGES and STEP formats. Please contact your Bridgelux sales representative for assistance.

# Precautions

## CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the LED linear. Please consult Bridgelux Application Note for additional information.

## CAUTION: EYE SAFETY

The Bridgelux EB series emits visible light, that, under certain circumstances, could be harmful to the eye. Proper safeguards must be used.

## CAUTION: RISK OF BURN

Do not touch the EB Series linears during operation. Allow the linear to cool for a sufficient period of time before handling. The EB Series linears may reach elevated temperatures such that could burn skin when touched.

## CAUTION

### CONTACT WITH LIGHT EMITTING SURFACE (LES)

Avoid any contact with the LES. Do not touch the LES of the linear or apply stress to the LES (yellow phosphor resin area). Contact may cause damage to the linear.

Optics and reflectors must not be mounted in contact with the LES (yellow phosphor resin area).

Optical devices may be mounted on the top surface of the EB Series linear. Use the mechanical features of the linear housing, edges and/or mounting holes to locate and secure optical devices as needed.

# Disclaimers

## STANDARD TEST CONDITIONS

Unless otherwise stated, linear testing is performed at the nominal drive current.

## MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

# About Bridgelux: Bridging Light and Life™

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

**For more information about the company, please visit**  
**bridgelux.com**  
**twitter.com/Bridgelux**  
**facebook.com/Bridgelux**  
**youtube.com/user/Bridgelux**  
**linkedin.com/company/bridgelux-inc-\_2**  
**WeChat ID: BridgeluxInChina**



46410 Fremont Blvd  
Fremont, CA 94538 USA  
Tel (925) 583-8400  
Fax (925) 583-8401  
**www.bridgelux.com**

© 2024 Bridgelux, Inc. All rights reserved. Product specifications are subject to change without notice. Bridgelux and the Bridgelux stylized logo design are registered trademarks of Bridgelux, Inc. EB Series and Bridging Light and Life are trademarks of Bridgelux, Inc. All other trademarks are the property of their respective owners.

**Bridgelux F90 EB Series 1" Cutable Data Sheet DS537 Rev. A (09/2024)**