


Bridgelux® Pallas-D Single Channel 44W (DALI-2) Brick Driver

Product Data Sheet DS1210

Product Feature Map

Bridgelux Pallas-D (DALI) Single Channel 44W Driver provides dynamic constant current output for LED modules and arrays. This Driver interoperates with DALI-2 standard lighting systems and protocols and allows for simple integration of Bridgelux's and all major brands White Arrays and Linear modules. Please visit www.bridgelux.com for more information.

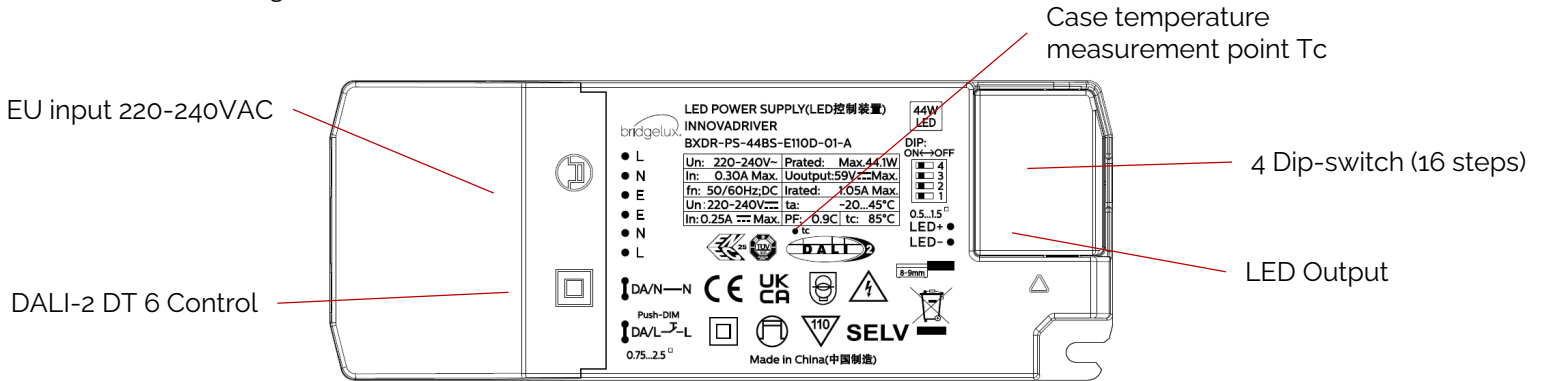

Product Nomenclature

The part number designation for Bridgelux Pallas-D (DALI) Single Channel 44W Driver is explained as follows:

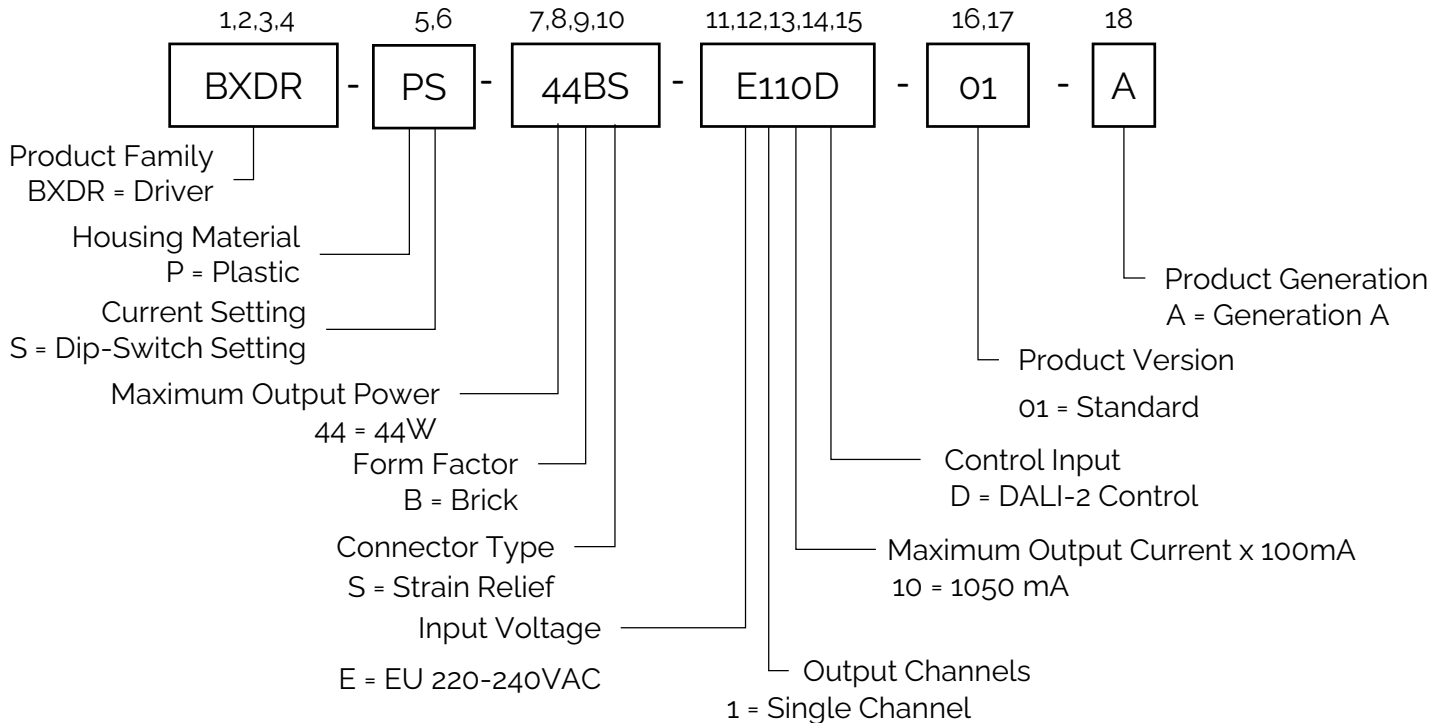


Table 1: **Product Selection Guide**

Part Number	Configuration
BXDR-PS-44BS-E110D-01-A	Brick with strain relief built-in

Electrical Characteristics

Table 2: Input Electrical Characteristics

Parameter	Unit	Specification
Nominal voltage	V	220 – 240
Nominal frequency	Hz	50 / 60
AC voltage range	V	198 – 264
DC voltage range	V	176 - 276
Nominal current	A	0.3
Power factor (Full load)	-	≥ 0.9
THD (Full load)	%	≤ 10
Efficiency (Full load)	%	≥ 88
NO load	W	≤ 0.5
Protection class	-	I, II
Inrush current(Cold start)	A pk	< 5.6 (th = 50 μs)
Max. units per circuit breaker	-	B10: 37 B16: 59 C10: 37 C16: 59

Table 3: Output Electrical Characteristics

Parameter	Unit	Specification
Nominal voltage range	V	6-52V 6-49V 6-46V 6-44V 6-42V
Maximum voltage(Open Circuit)	Vdc	≤ 59
Nominal current	mA	300 350 400 450 500 550 600 650 700 750 800 850 900 950 1000 1050
Current accuracy	%	+/- 5
Dimming		Yes DALI-2 (IEC 62386-101,102,207) & Push Dim
Dimming Range		1% - 100%
Current ripple LF < 3KHz	%	≤ 4
Pst LM	-	≤ 1
SVM	-	≤ 0.4
Maximum power	W	44
Galvanic isolation: SELV	-	SELV

Electrical Characteristics

Figure 1: Power Factor vs. Power

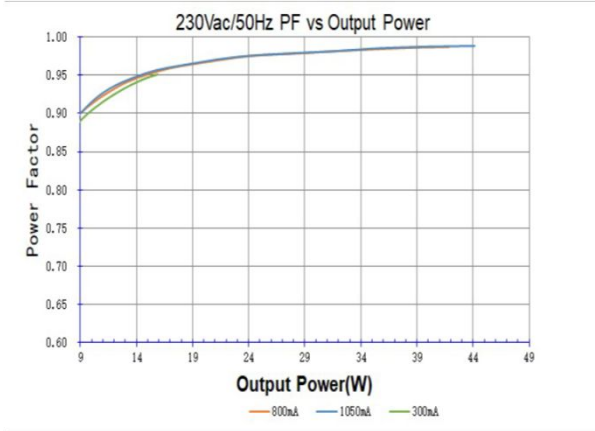


Figure 2: Total Harmonic Distortion vs. Power

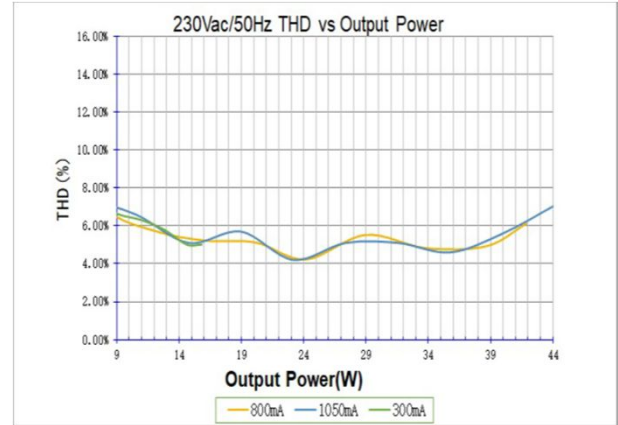


Figure 3: Efficiency vs. Power


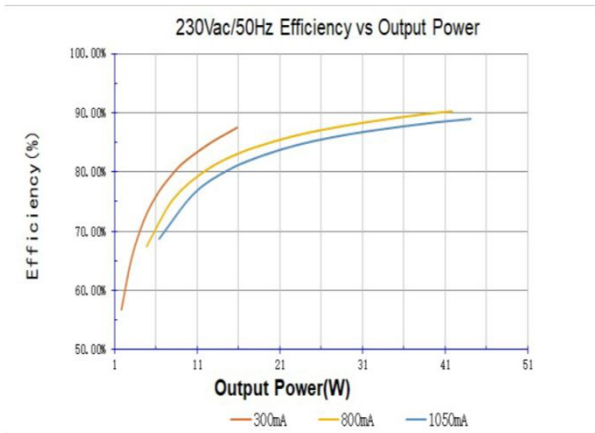


Figure 4: Expected Life Time



Figure 5: Operating Window

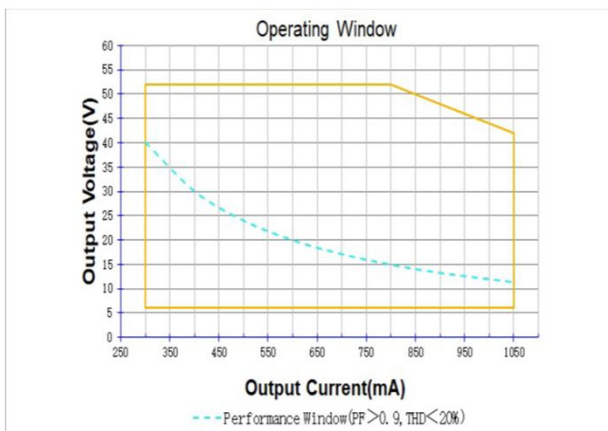


Mechanical Characteristics

Table 4: Product Mechanical data

Characteristics	Specification
Dimensions	170.0 mm (L) x 65.0 mm (W) x 30.0 mm (H)
Enclosure Materials	PC Plastic
Weight	188 g
Ingress Protection	IP20

Figure 6: Mechanical Drawing

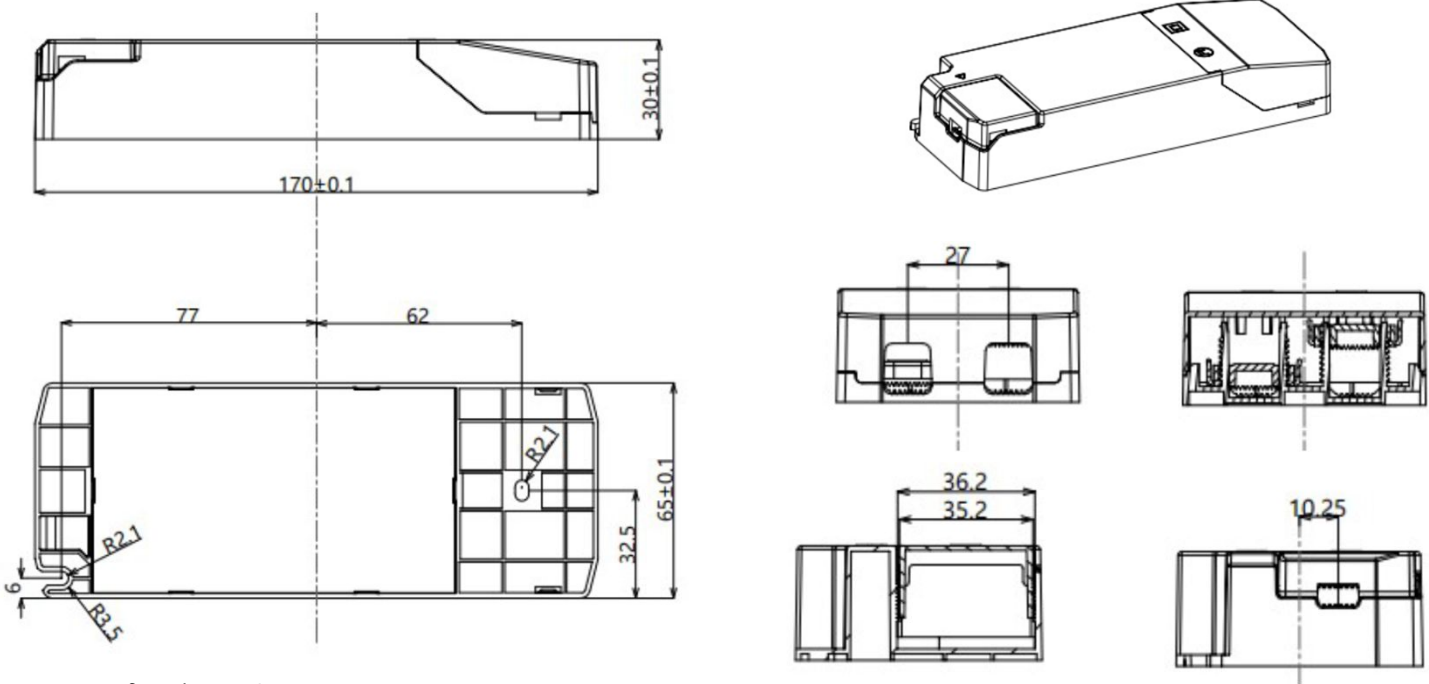

Notes for Figure 6:

1. Drawing dimensions are in millimeters
2. Unless otherwise specified, all linear tolerances are +/-1.0mm

Packaging

Table 5: Packaging Box Configuration

Parameters	Specification
Driver quantity	60 pcs
Outer dimensions	353 X 335 X 220 mm
Weight	12.0 kg

DIP-switch operation instructions & operating window

Table 6: Dip-switch operation instructions & operating window

Dip-switch setting				U _{out}	I _{out}
1	2	3	4		
OFF	OFF	OFF	OFF	6-52V	300 mA
OFF	OFF	OFF	ON	6-52V	350 mA
OFF	OFF	ON	OFF	6-52V	400 mA
OFF	OFF	ON	ON	6-52V	450 mA
OFF	ON	OFF	OFF	6-52V	500 mA
OFF	ON	OFF	ON	6-52V	550 mA
OFF	ON	ON	OFF	6-52V	600 mA
OFF	ON	ON	ON	6-52V	650 mA
ON	OFF	OFF	OFF	6-52V	700 mA
ON	OFF	OFF	ON	6-52V	750 mA
ON	OFF	ON	OFF	6-52V	800 mA
ON	OFF	ON	ON	6-49V	850 mA
ON	ON	OFF	OFF	6-49V	900 mA
ON	ON	OFF	ON	6-46V	950 mA
ON	ON	ON	OFF	6-44V	1,000 mA
ON	ON	ON	ON	6-42V	1,050 mA

Wiring Diagram

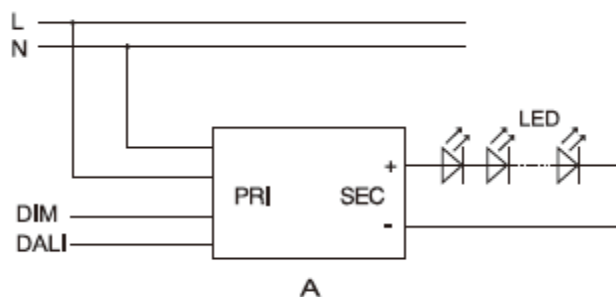


Table 7: **Wiring**

PRI		
PRI	Cable cross-section	0.75 – 2.5 mm ² / AWG 18 - 13
	Stripping	8 - 9 mm
SEC	Cable cross-section	0.5 – 1.5 mm ² / AWG 20 - 15
	Stripping	8 - 9 mm

Notes for Table 7:

1. Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.
2. Unless otherwise specified, all linear tolerances are +/-1.0mm

Environmental and Regulatory Standards

Table 8: Environmental Conditions

Parameter	Specification
Ambient Operating Temperature	-20°C to + 45°C
Max. Case Temperature Tc	+85°C (max)
Max. Case Temperature (In fault condition)	+110°C
Humidity Rating	Maximum 95% Relative Humidity, non condensing
Storage Temperature	-20°C to + 80°C
Expected Lifetime	50,000 hours (Tc < 85°C) 100,000 hours (Tc < 75°C)

Table 9: Regulatory Approvals and Compliance

Specification	Reference Standard	Condition
DC or AC supplied electronic controlgear for LED modules	EN 62384:2006/A1:2009	electronic controlgear for use on DC or AC supplies up to 1 000 V (alternating current at 50 Hz or 60 Hz) and with an output frequency which can deviate from the supply frequency
Conducted and Radiated EMI	EN 55015:2019+A1:2020 (CISPR 15:2018)	
Harmonic Current Emissions	EN IEC 61000-3-2:2014	
Voltage Fluctuations & Flicker	IEC 61000-3-3:2013	
ESD (Electrostatic Discharge)	IEC 61547:2009 Section 5.2 Test des.: IEC 61000-4-2	4 kV contact discharge, 8 kV air discharge, level 3
Continuous Radiated Disturbance	IEC 61547:2009 Section 5.3 Test des.: IEC 61000-4-3	3 V/m, 80 - 1000 MHz, 80% modulated at distance of 3 meters
Electrical Fast Transient	IEC 61547:2009 Section 5.5 Test des.: IEC 61000-4-4	± 1 kV on AC power port for 1 minute,
Surge	IEC 61547 Section 5.7 Test des.: IEC 61000-4-5	± 1 kV (differential mode)
Continuous Conducted Disturbance	IEC 61547:2009 Section 5.6 Test des.: IEC 61000-4-6	3V, 0.15-80 MHz, 80% modulated, Level 2
Voltage Dips	IEC 61547 Section 5.8, 5.9 Test des.: IEC 61000-4-11	70% dip during 25 cycles @ 50Hz, 30 cycles @ 60Hz 0% dip during ½ cycles

Regulatory Standards (continued)

Table 10: Safety Agency Approvals

Specification	Reference Standard	Condition
ENEC / CE / UKCA	EN 61347-1:2015, EN 61347-2-13:2014/A1:2017	ENEC Certification pending
Glow wire test	EN 61347-1:2015	Passed with increased temperature at 650°C

Table 11: DALI-2 DT6 Standards

Specification	Reference Standard	Condition
System Components (Part 101)	EN62386-101	
Control Gear (Part 102)	EN62386-102	
LED Module (Part 207)	EN62386-207	



Protection

Table 12: Protection

Parameters	Specification
Over Power Protection	>50W Yes / Auto Resume
Over Voltage Protection	> 59Vdc Yes / Auto Resume
Short Circuit Protection	Yes / Auto Resume
Over-Temperature	Ta > 80°C Yes / Auto Resume

Design Resources

Application Notes

Please contact your Bridgelux sales representative for assistance on obtaining application support when designing with the Bridgelux Pallas-D Single Channel Driver. For a list of available resources, visit www.bridgelux.com.

Precautions

CAUTION: PRODUCT HANDLING

Handle the Pallas-D Single Channel Driver with care to prevent any damage from mechanical shock. It is recommended to handle this driver in a static-free environment. Do not open or disassemble the product. To maintain product warranty, the installer is responsible for ensuring that the driver's operating conditions do not exceed the maximum conditions stated within this data sheet.

CAUTION: PRODUCT INSTALLATION

Incorrect installation of the Pallas-D Single Channel Driver can cause irreparable damage to the driver, connected LEDs. Pay attention when connecting the LED load and observe the correct polarity of the output terminals as specified in this data sheet and on the driver label.

CAUTION: ELECTRIC SHOCK

Be aware of the possibility of an electric shock hazard which can result in serious injury or death. Disconnect power before servicing or installing this device.

Disclaimers

MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

About Bridgelux: Bridging Light and Life™

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

For more information about the company, please visit

bridgelux.com

twitter.com/Bridgelux

facebook.com/Bridgelux

youtube.com/user/Bridgelux

linkedin.com/company/bridgelux

WeChat ID: BridgeluxInChina



46410 Fremont Blvd
Fremont, CA 94538 USA
Tel (925) 583-8400
www.bridgelux.com