


Bridgelux® Pallas-N Single Channel 20W (Non-Dim) Brick Driver Product Data Sheet DS1211






Product Feature Map

Bridgelux Pallas-N (Non-Dim) Single Channel 20W Driver provides dynamic constant current output for LED modules and arrays. This driver provides easy-to-adjust Dip-Switches configurable output current and allows for simple integration of Bridgelux's and all major brands White Arrays and Linear modules. Please visit www.bridgelux.com for more information.

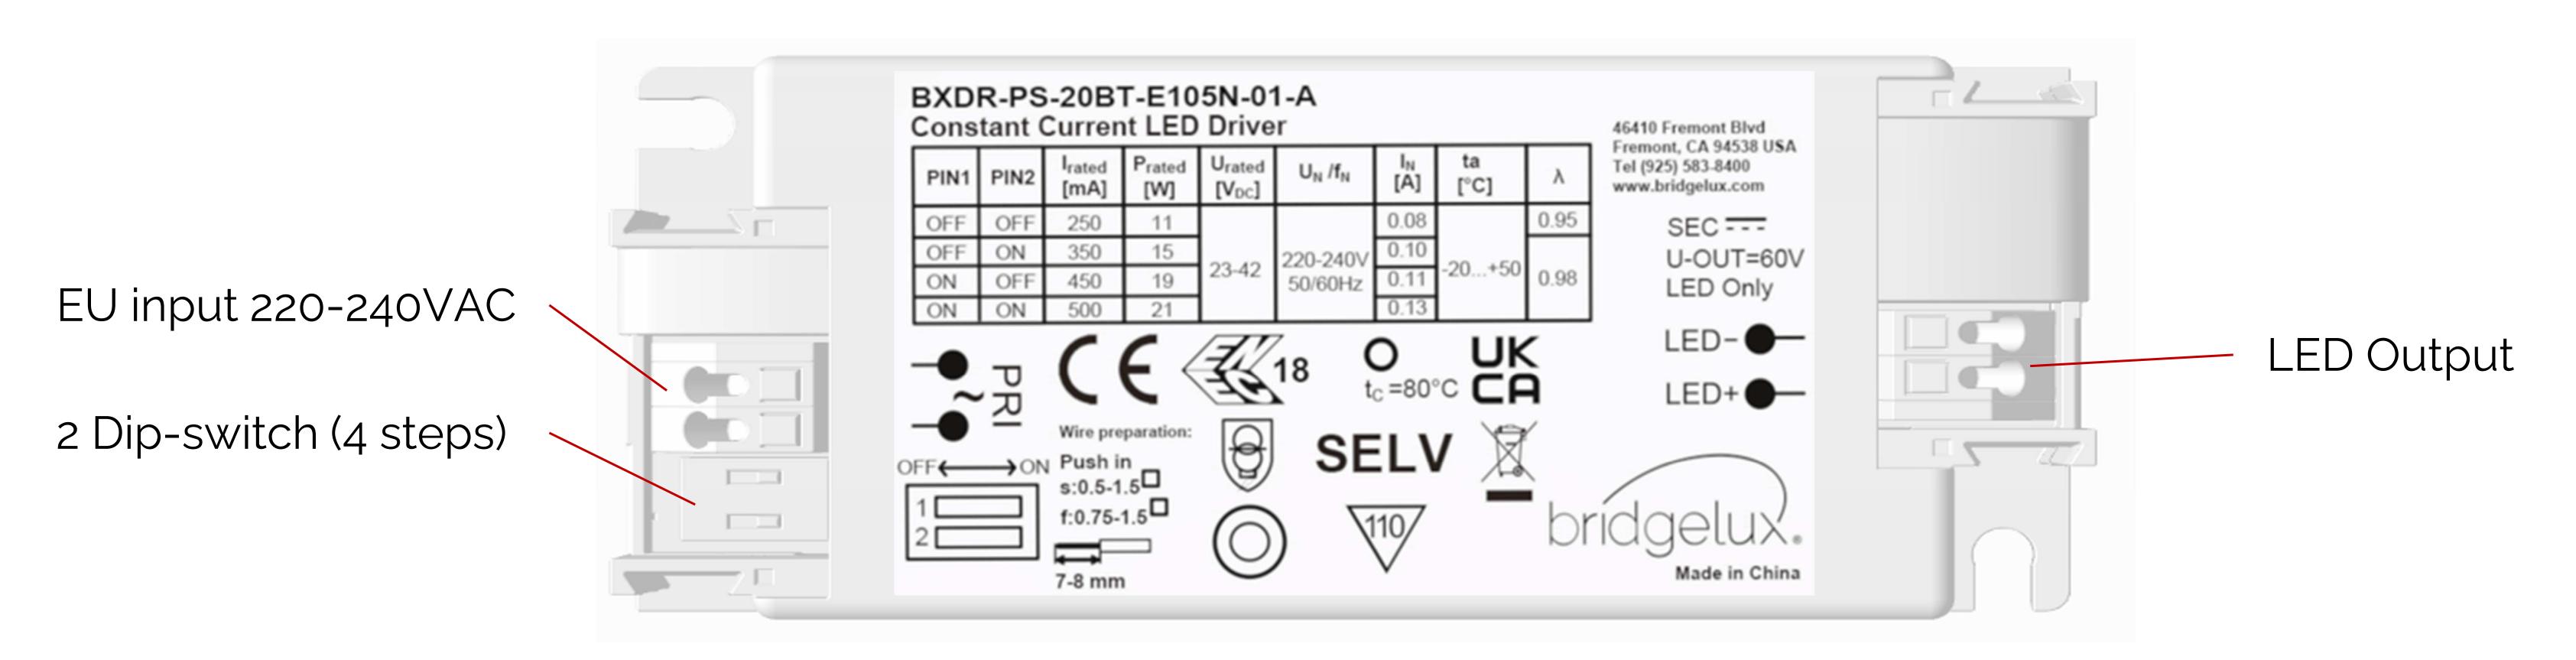

Product Nomenclature

The part number designation for Bridgelux Pallas-N (Non-Dim) Single Channel 20W Driver is explained as follows:

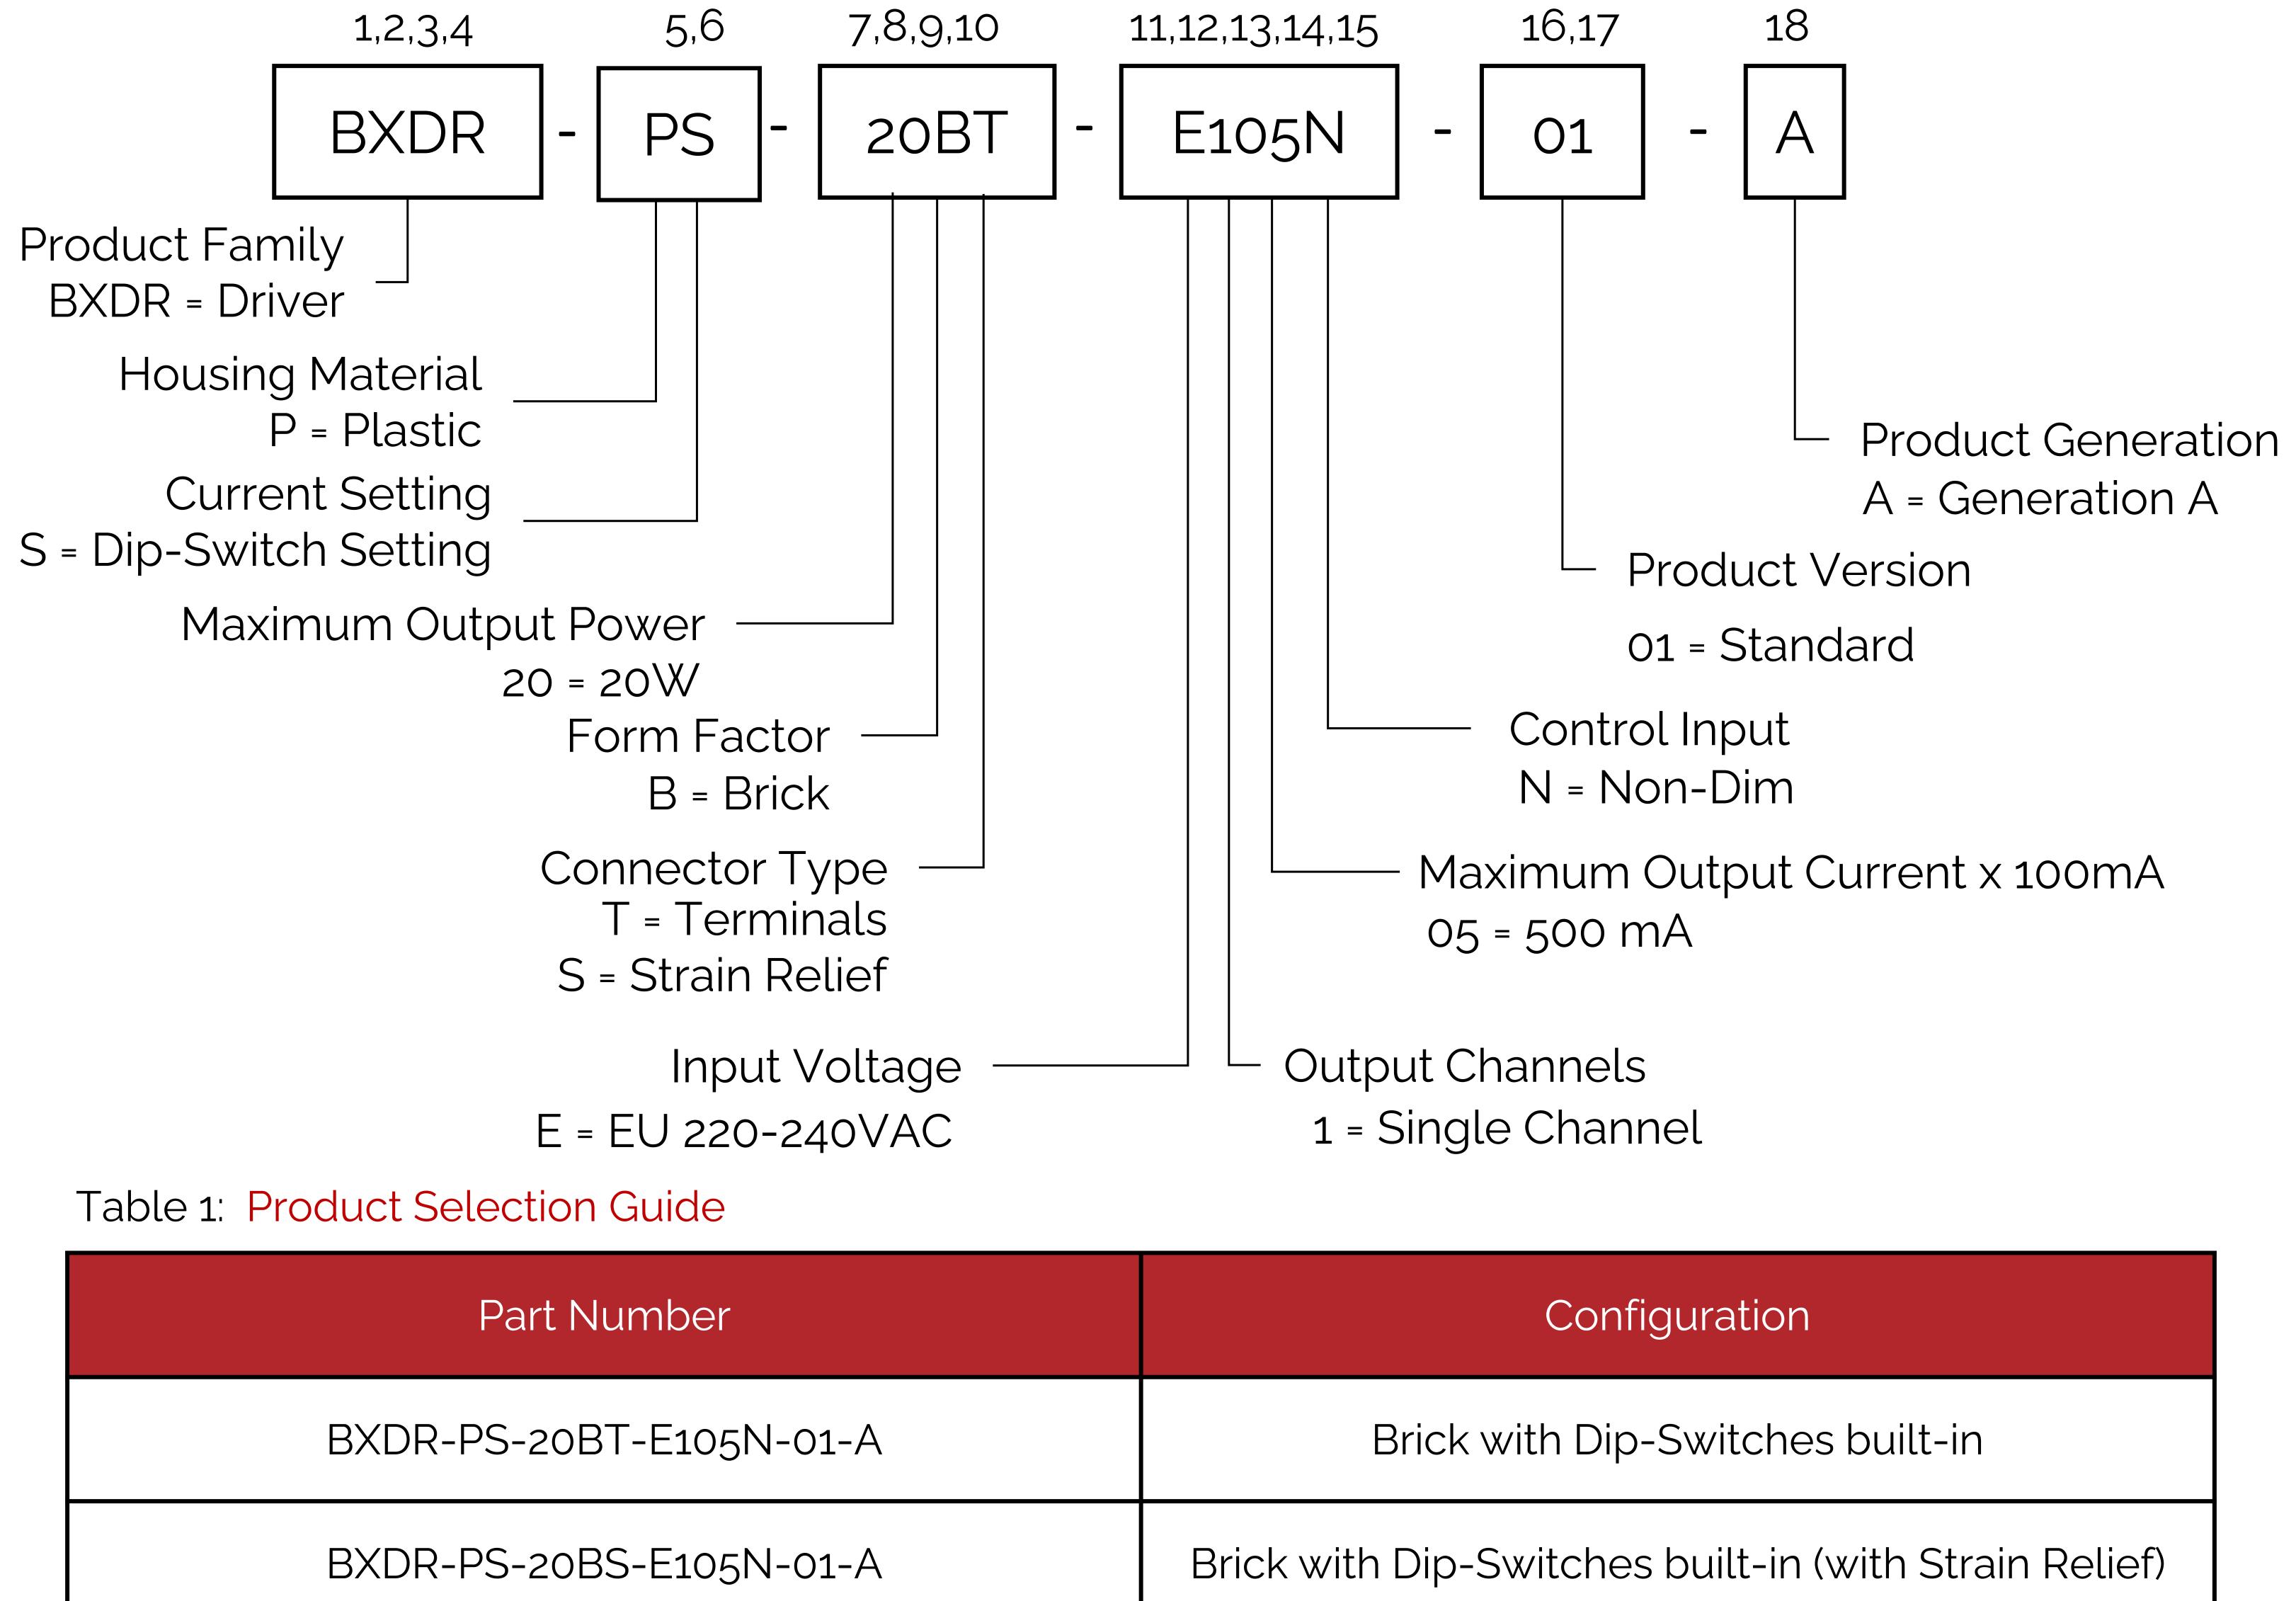

Electrical Characteristics

Table 2: Input Electrical Characteristics

Parameter	Unit	Specification
Nominal voltage	V	220 – 240
Nominal frequency	Hz	50 / 60
AC voltage range	V	198 – 264
DC voltage range	V	N/A
Nominal current	Α	0.13
Power factor (Full load)		≥ 0.95
THD (Full load)	%	≤ 10
Efficiency (Full load)	%	≥ 88
NO load	W	N/A (Load switching on output side is not permitted)
Protection class		
Inrush current(Cold start)	Apk	< 4 (th = 50 µs)
Max. units per circuit breaker		B10: 38; B16: 60; B25: 94; C10: 57; C16: 91; C25: 142

Table 3: Output Electrical Characteristics

Parameter	Unit		Specifi	ication	
Nominal voltage range	V	23-42V	23-42V	23-42V	23-42V
Maximum voltage(Open Circuit)	Vdc	≤ 60			
Nominal current	mA	250	350	450	500
Current accuracy	%	+/-5			
Current ripple LF < 200Hz	%	≤ 5			
Pst LM		≤ 1			
SVM		≤ 0.4			
Maximum power	W	20			
Galvanic isolation		SELV			

Electrical Characteristics



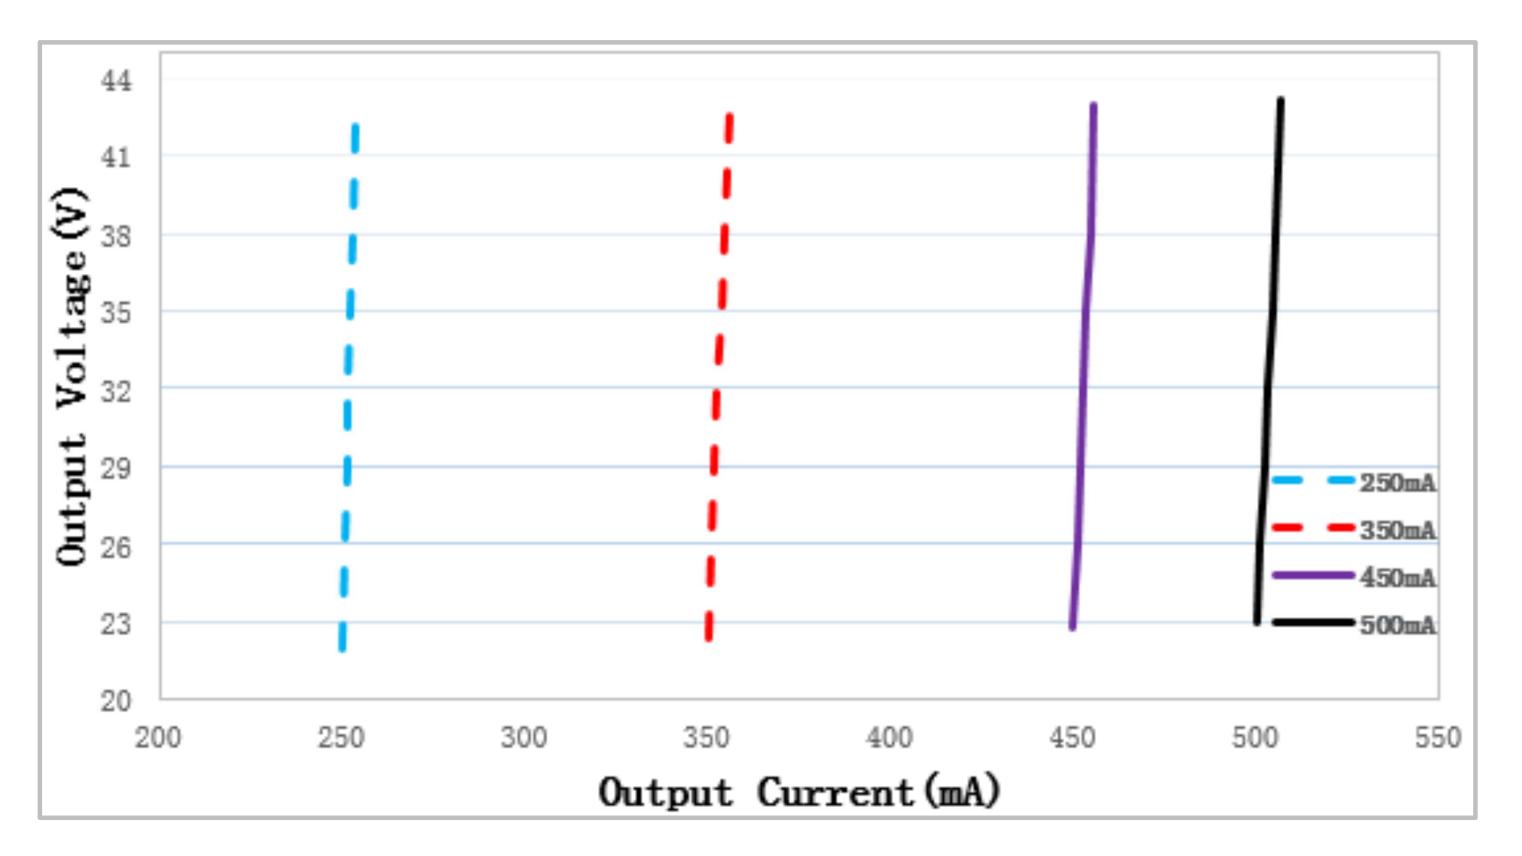


Figure 3: Typical Efficiency vs. Load

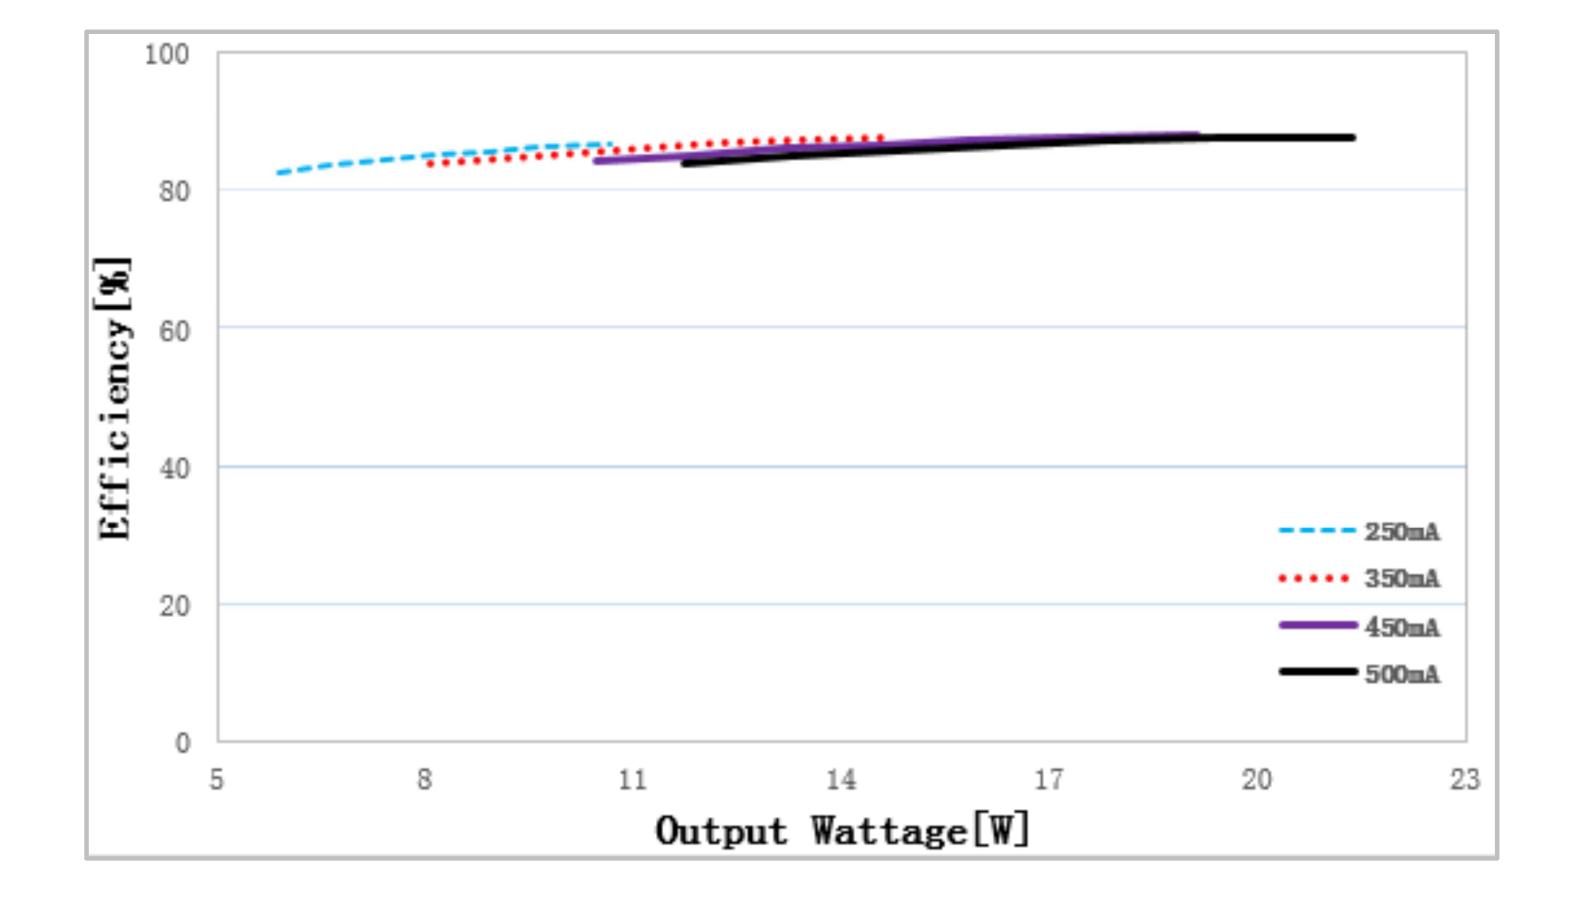


Figure 2: Typical THD vs. Load


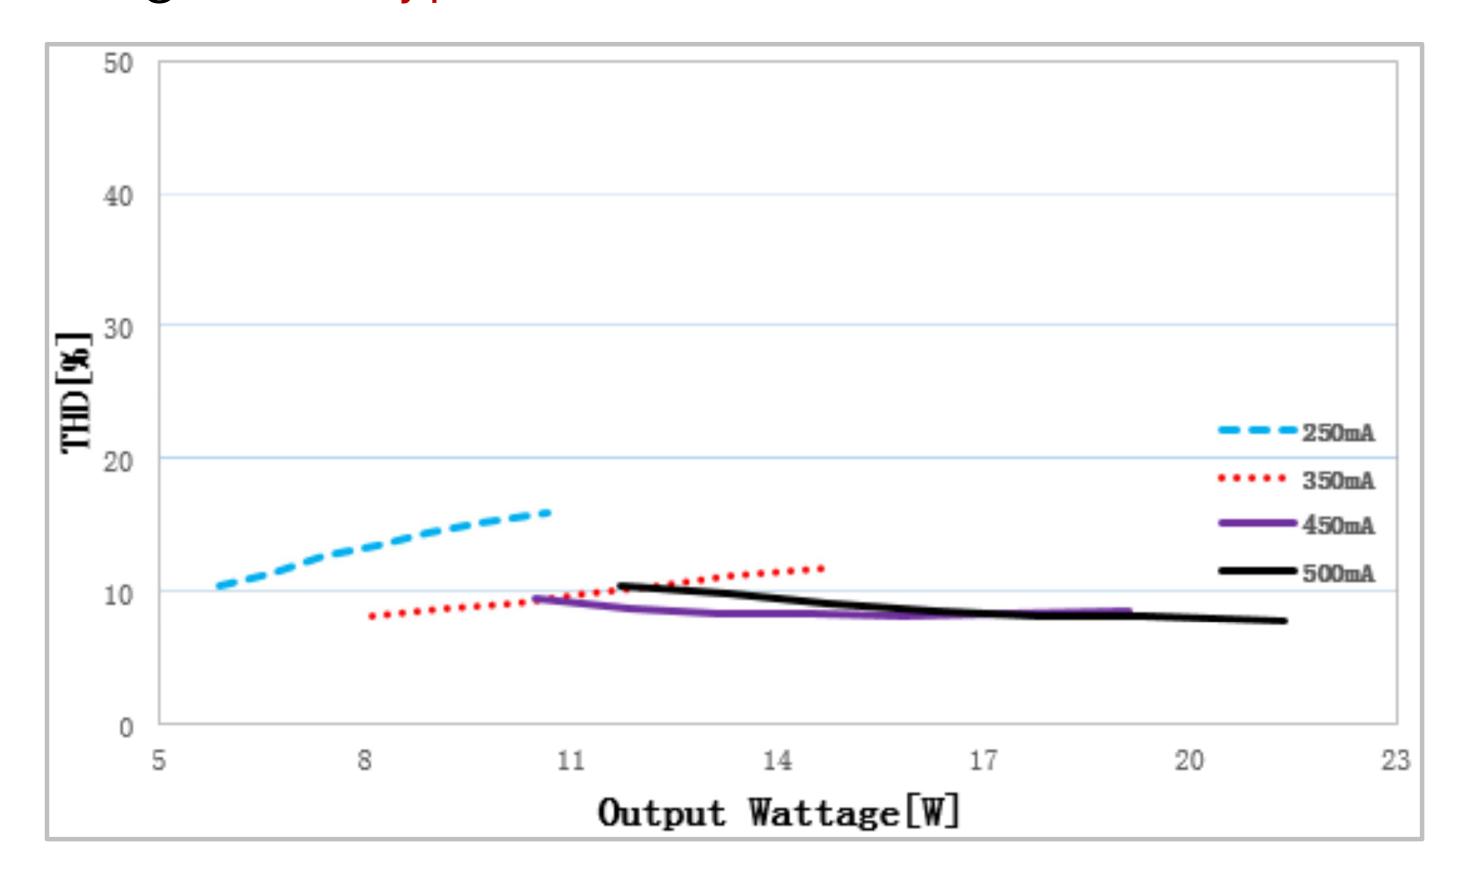


Figure 4: Typical Power Factor vs Load

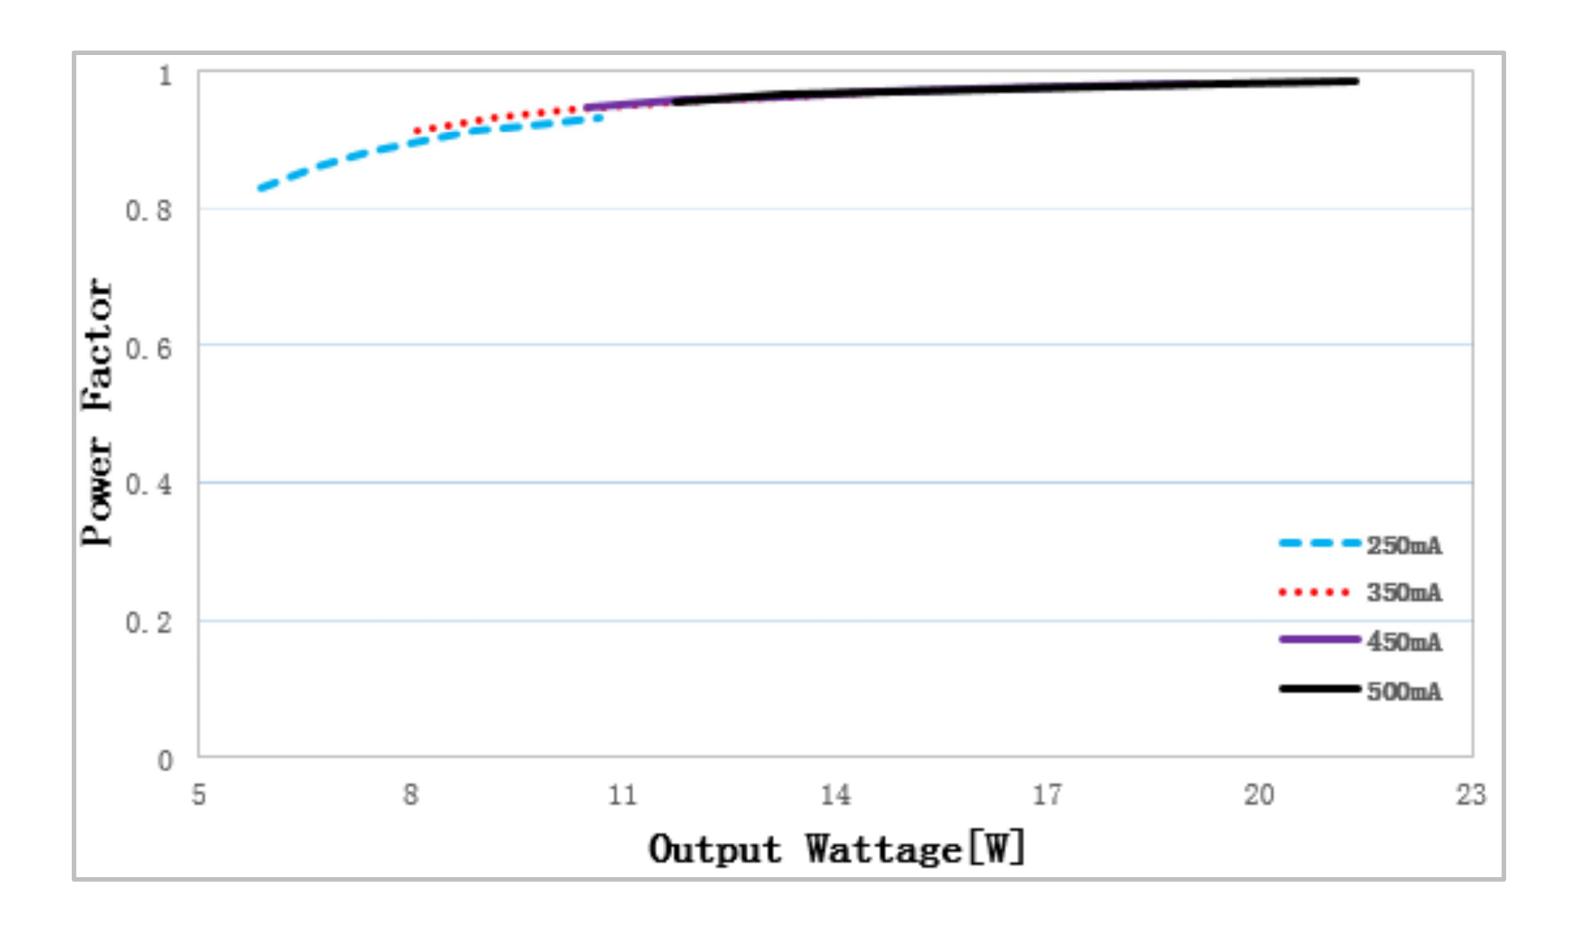



Mechanical Characteristics

Table 4: Product Selection Guide


Characteristics	Specification	
Dimensions	97.0 mm (L) x 43.0 mm (W) x 29.5 mm (H) 145.0 mm (L) x 43.0 mm (W) x 29.5 mm (H)	(with Strain Relief)
Enclosure Materials	PC Plastic	
Weight	82.0 g 104.2 g	(with Strain Relief)
Ingress Protection	IP20	


Figure 5: Mechanical Drawing

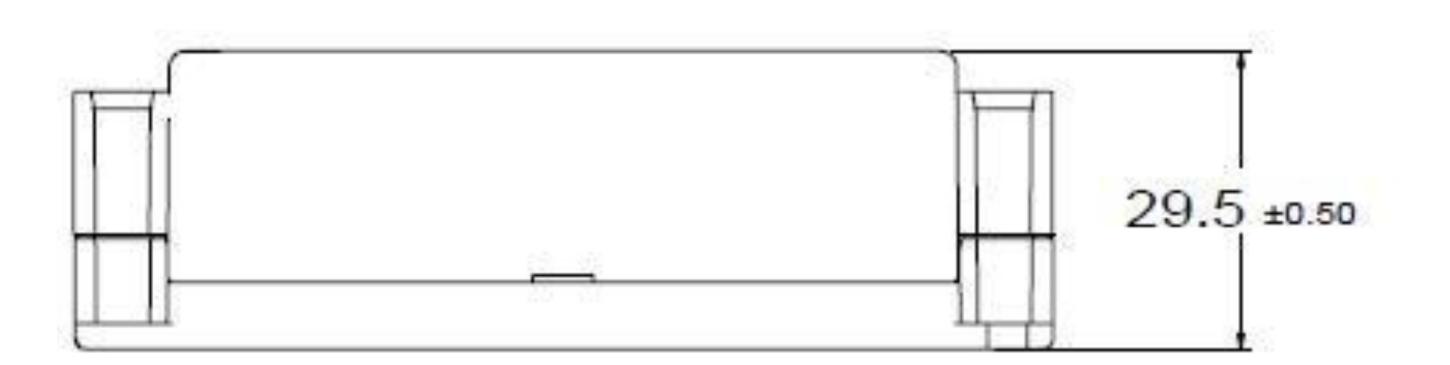

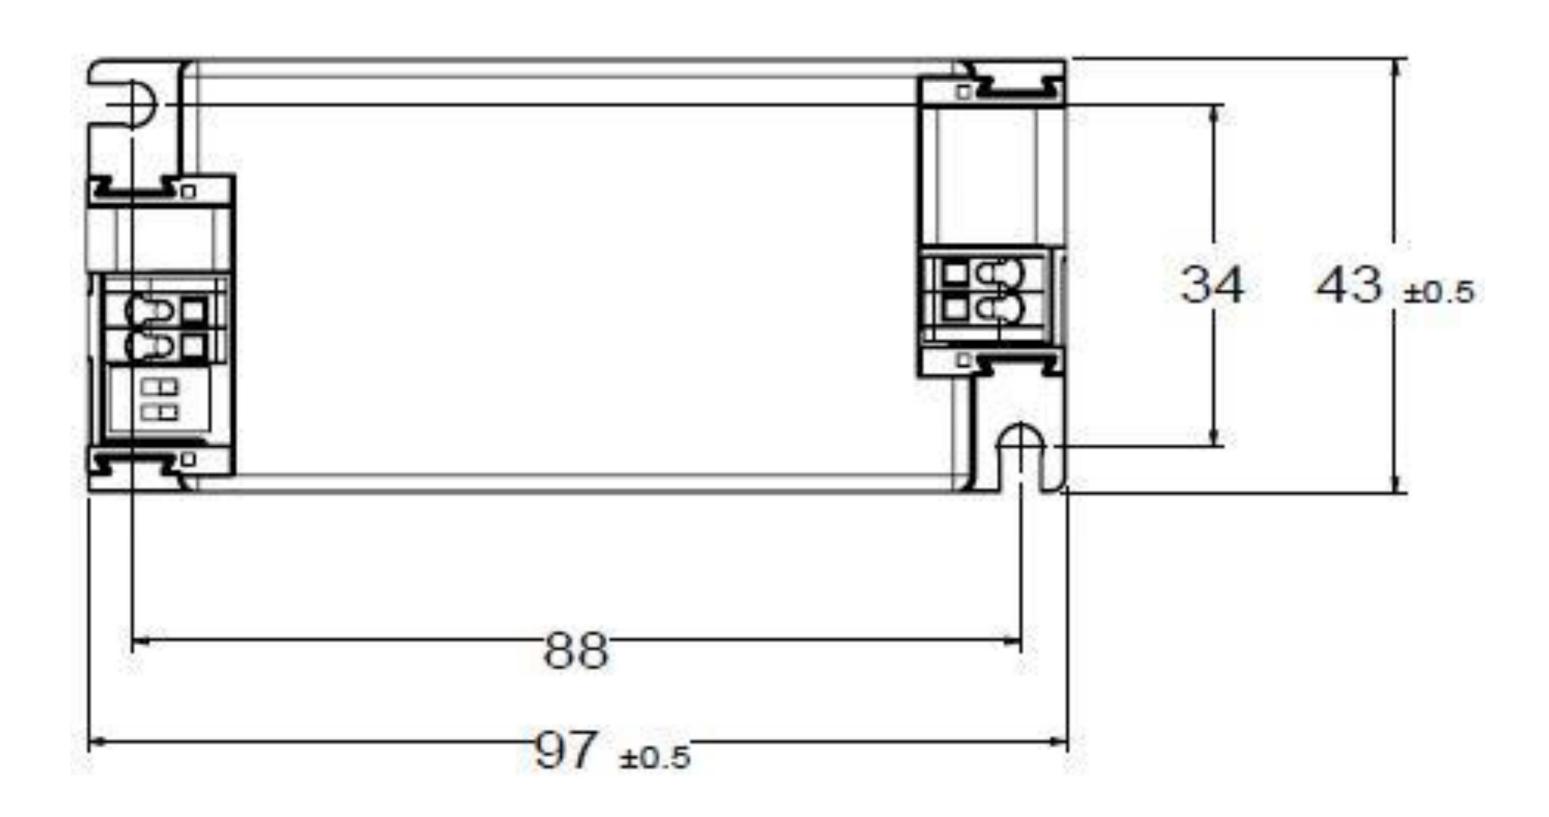

An optional cable clamp is available. This cable clamp can be snapped into the driver and thus converts it into an independent installation.

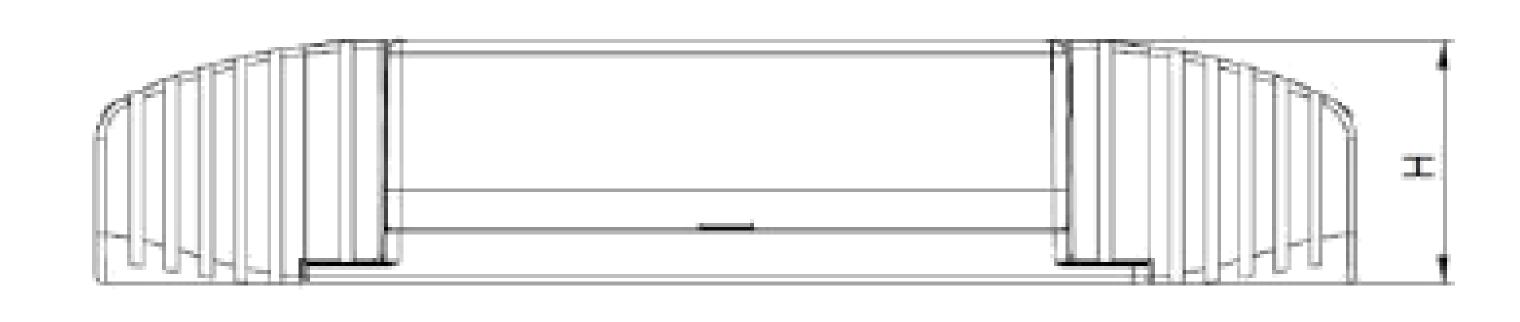

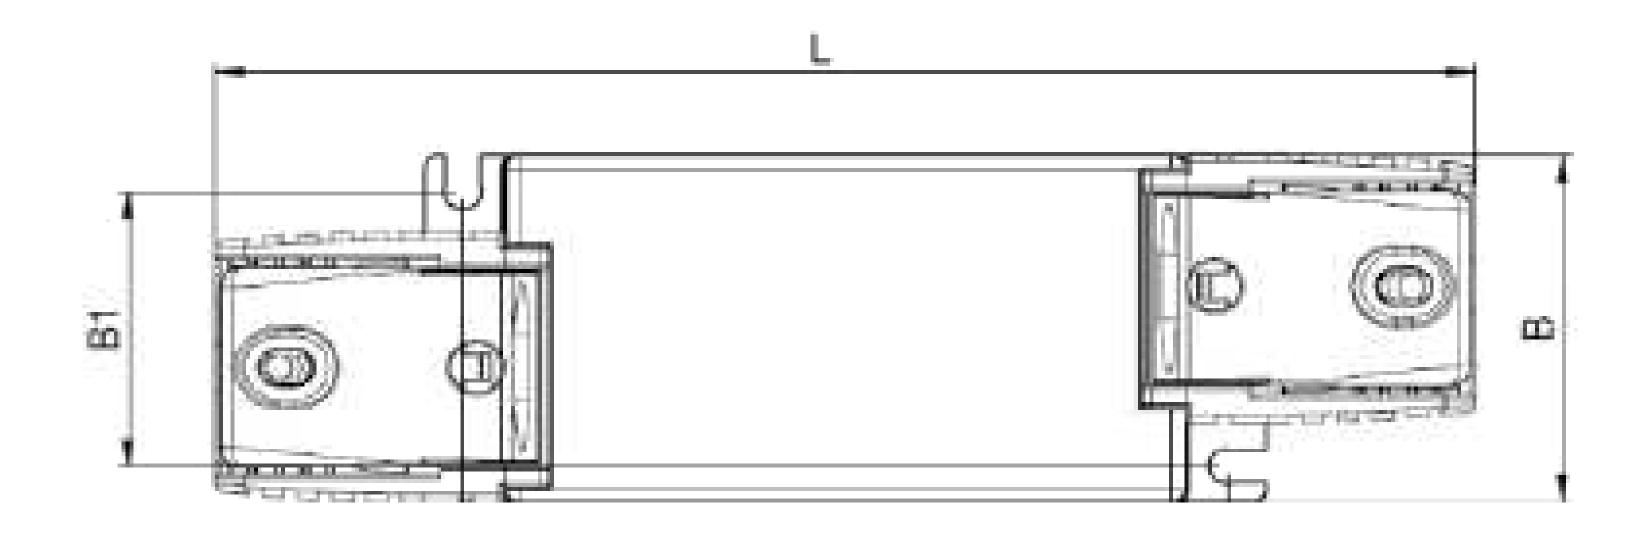

- Notes for Figure 5: 1. Drawing dimensions are in millimeters 2. Unless otherwise specified, all linear tolerances are +/-1.0mm.

L	145mm
L1	88mm
В	43mm
B1	34mm
Η	29.5mm

Wiring Diagram

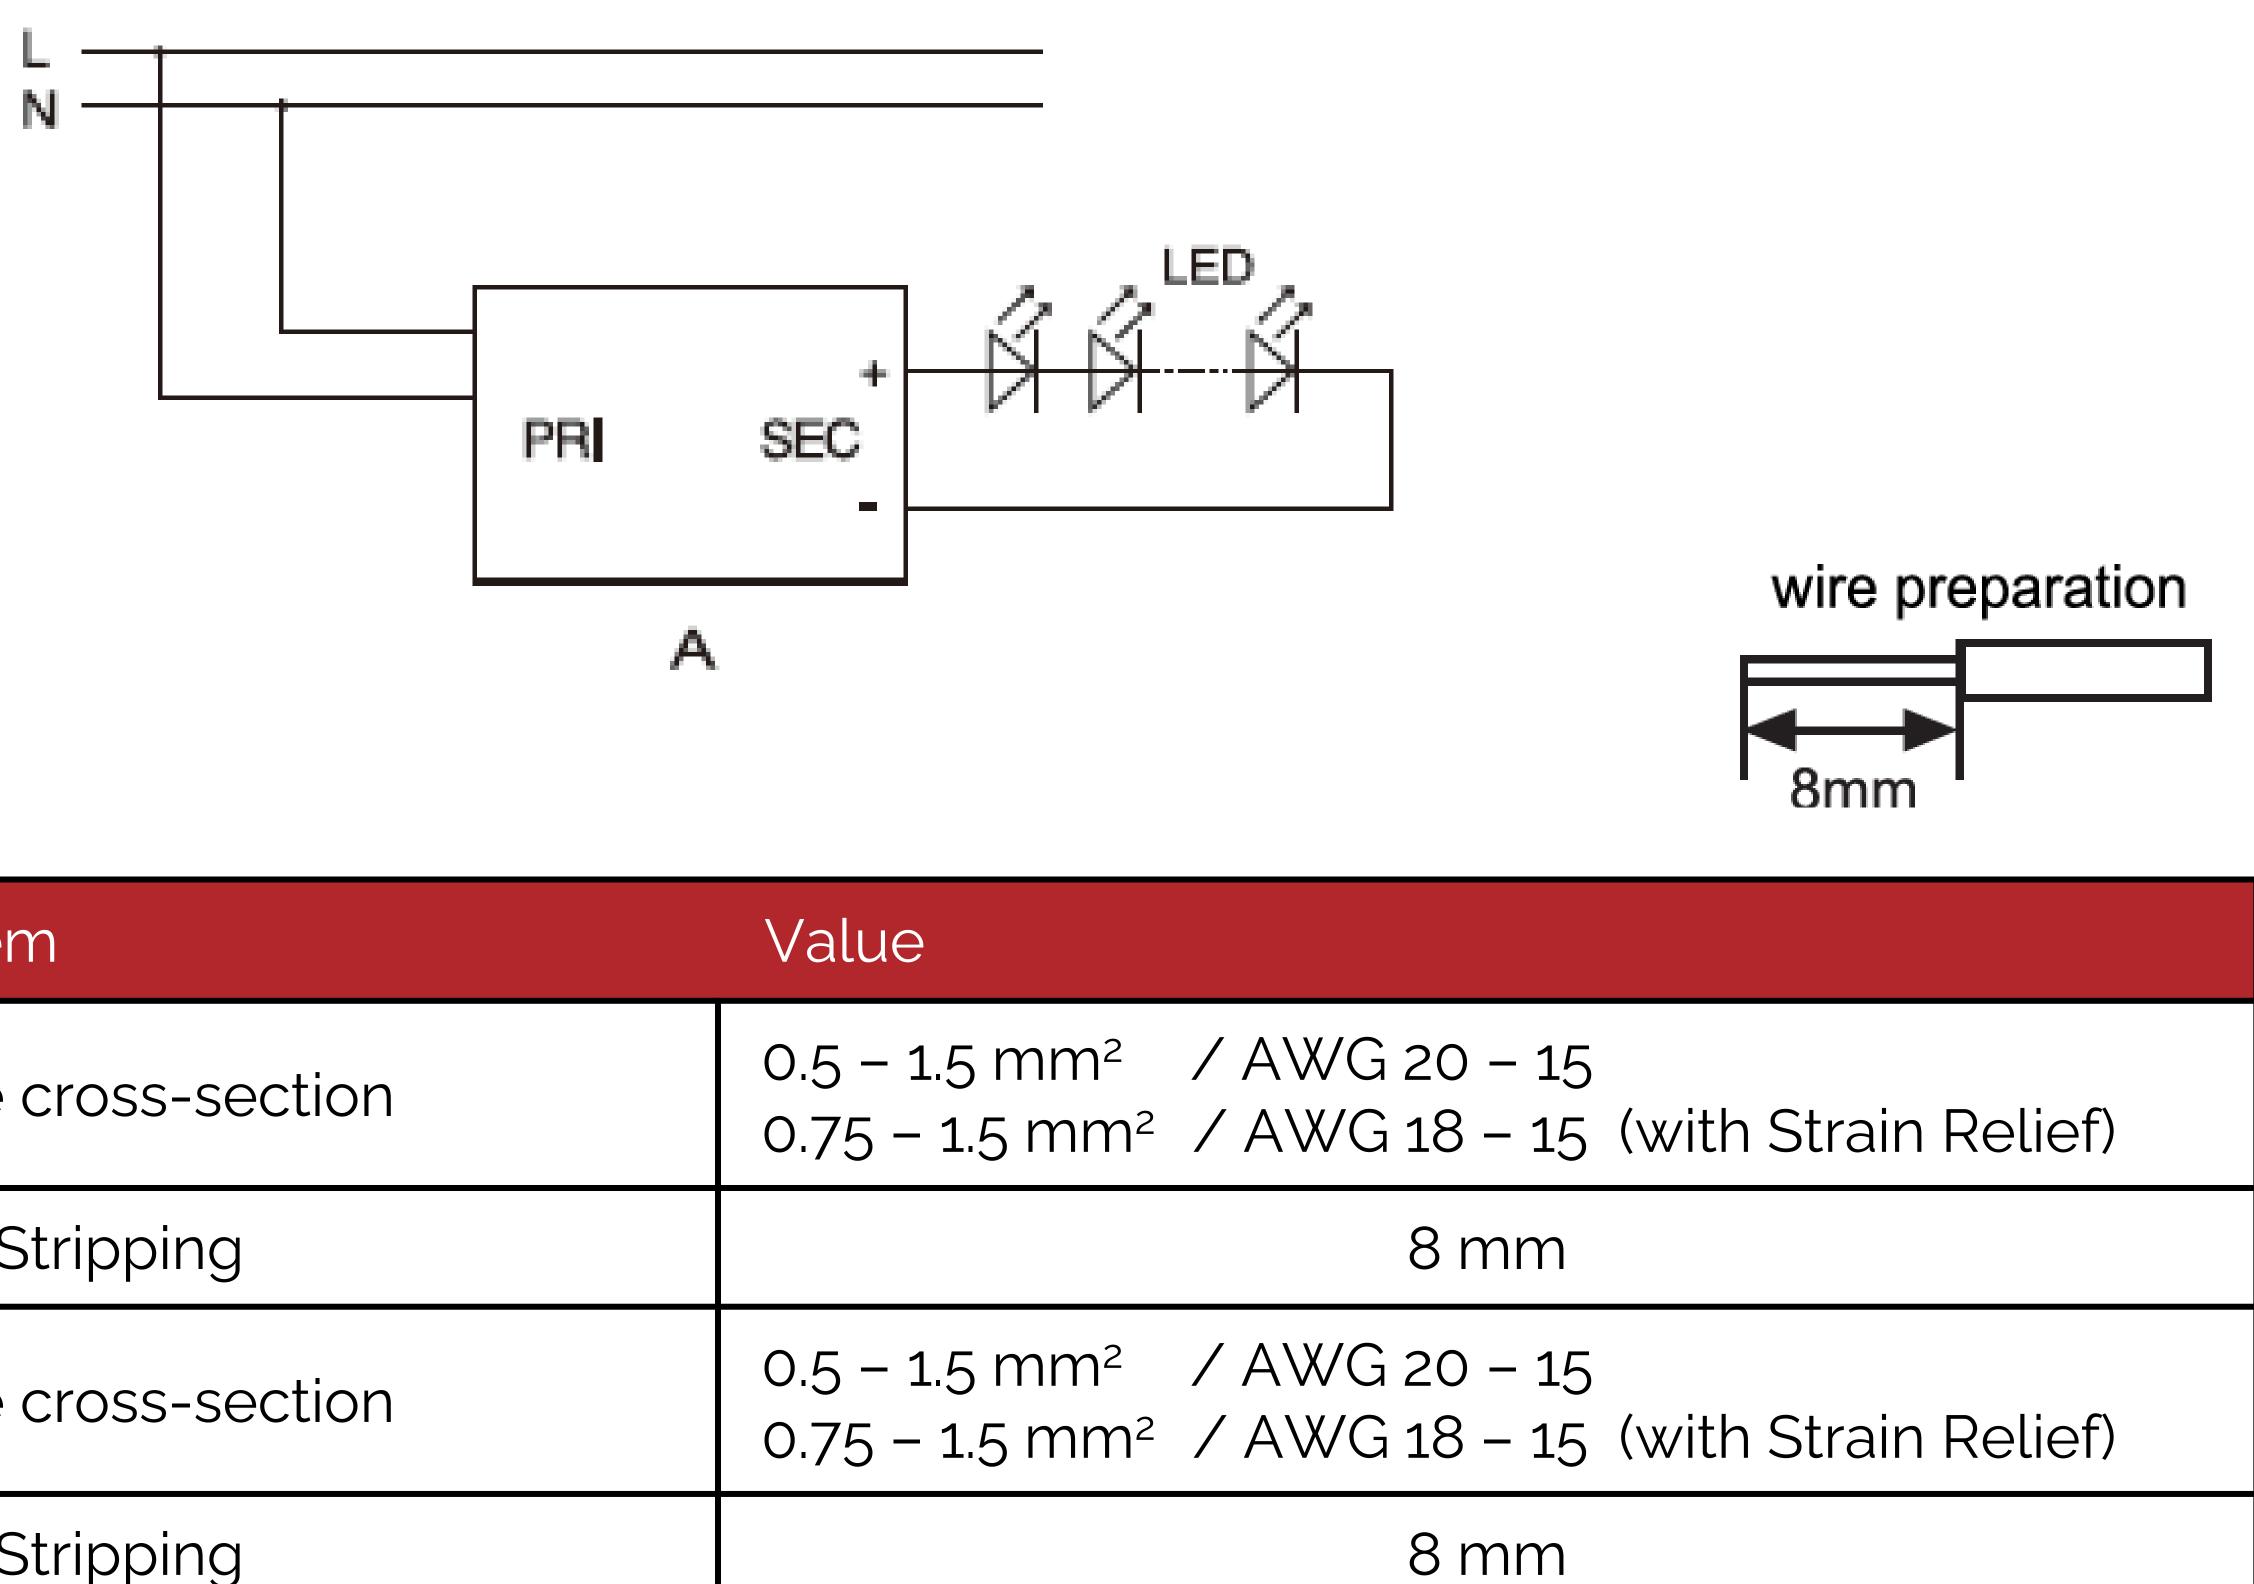


Table 5: Wiring

	Specification item	
PRI	Cable cross-section	
	Stripping	
SEC	Cable cross-section	
	Stripping	

Notes for Table 5:

1. Unless otherwise specified, all linear tolerances are +/-1.0mm

DIP-switch operation instructions & operating window

Table 6: Dip-switch operation instructions & operating window

Dip-switch setting			
1	2	Uout	out
OFF	OFF	23-42V	250 mA
OFF	ON	23-42V	350 mA
ON	OFF	23-42V	450 mA
ON	ON	23-42V	500 mA

Environmental and Regulatory Standards

Table 7: Environmental Conditions

Parameter	Specification
Ambient Operating Temperature	-20°C to + 50°C
Max. Case Temperature Tc	+80°C (max)
Max. Case Temperature (In fault condition)	+110°C
Humidity Rating	Maximum 85% Relative Humidity, non condensing
Storage Temperature	-20°C to + 70°C
Expected Lifetime	> 50,000 hours(Tc < 75°C), max. 10% failure rate

Table 8: Regulatory Approvals and Compliance

Specification	Reference standard	Condition
Conducted and Radiated EMI	EN 55015:2019+A1:2020 (CISPR 15:2018)	
Harmonic Current Emissions	EN IEC 61000-3-2:2019	
Voltage Fluctuations & Flicker	IEC 61000-3-3:2013+A1:2019	
ESD (Electrostatic Discharge)	IEC 61547:2009 Section 5.2 Test des.: IEC 61000-4-2	4 kV contact discharge, 8 kV air discharge, level 3
Continuous Radiated Disturbance	IEC 61547:2009 Section 5.3 Test des.: IEC 61000-4-3	3 V/m, 80 - 1000 MHz, 80% modulated at distance of 3 meters
Electrical Fast Transient	IEC 61547:2009 Section 5.5 Test des.: IEC 61000-4-4	±1kV on AC power port for 1 minute,
Surge	IEC 61547 Section 5.7 Test des.: IEC 61000-4-5	± 1 kV (differential mode) ± 2 kV (common mode)
Continuous Conducted Disturbance	IEC 61547:2009 Section 5.6 Test des.: IEC 61000-4-6	3V, 0.15-80 MHz, 80% modulated, Level 2
Voltage Dips	IEC 61547 Section 5.8, 5.9 Test des.: IEC 61000-4-11	70% dip during 25 cycles @ 50Hz, 30 cycles @ 60Hz 0% dip during ½ cycles
Touch Current	EN60598-1	lower than 0.7 mA, according to EN 60598-1 annex. G and EN 61347-1 annex A

Regulatory Standards (continued)

Table 9: Safety Agency Approvals

Specification	Reference standard	Condition
ENEC / CE / UKCA	EN 61347-1:2015, EN 61347-2-13:2014+A1	
Glow wire test	EN 61347-1:2015	Passed with increased temperature at 650°C


Packaging

Table 10: Packaging Box Configuration – BXDR-PS-20BT-E105N-01-A

Parameters	Specification
Driver quantity	20 pcs
Outer dimensions	228 X 208 X 78 mm
Weight	1.903 kg

Table 11: Packaging Box Configuration - BXDR-PS-20BS-E105N-01-A (Strain Relief version)

Parameters	Specification
Driver quantity	20 pcs
Outer dimensions	298 X 211 X 86 mm
Weight	2.300 kg

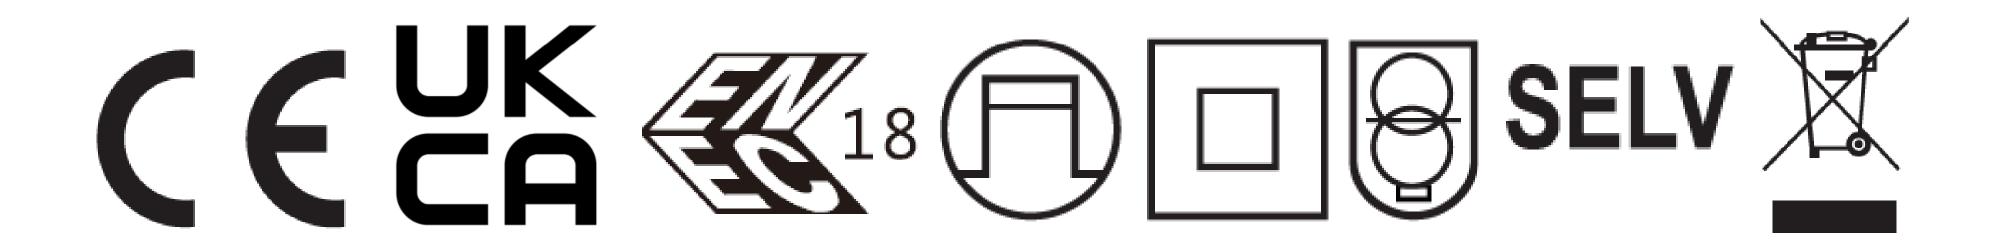

Design Resources

Application Notes

Please contact your Bridgelux sales representative for assistance on obtaining application support when designing with the Bridgelux Pallas-N Single Channel Driver. For a list of available resources, visit www.bridgelux.com.

Precautions

CAUTION: PRODUCT HANDLING

Handle the Pallas-N Single Channel Driver with care to prevent any damage from mechanical shock It is recommended to handle this driver in a static-free environment To maintain product warranty, the product must not be opened or disassembled and the installer must ensure that the driver's operating conditions do not exceed the maximum conditions stated within this data sheet.

CAUTION: PRODUCT INSTALLATION

Incorrect installation of the Pallas-N Single Channel Driver can cause irreparable damage to the driver, connected LEDs.

Pay attention when connecting the LED load and observe the correct polarity of the output terminals as specified in this data sheet and on the driver label. Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.

CAUTION: ELECTRIC SHOCK

Be aware of the possibility of an electric shock hazard which can result in serious injury or death. Disconnect power before servicing or installing this device.

Disclaimers

MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

About Bridgelux: Bridging Light and LifeTM

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

For more information about the company, please visit bridgelux.com twitter.com/Bridgelux facebook.com/Bridgelux youtube.com/user/Bridgelux linkedin.com/company/bridgelux WeChat ID: BridgeluxInChina

bridgelux

46410 Fremont Blvd Fremont, CA 94538 USA Tel (925) 583-8400 www.bridgelux.com

© 2023 Bridgelux, Inc. All rights reserved 2023. Product specifications are subject to change without notice. Bridgelux, the Bridgelux stylized logo design and Pallas-N are registered trademarks of Bridgelux, Inc. Bridging Light and Life is a trademark of Bridgelux, Inc. All other trademarks are the property of their respective owners.