




Bridgelux® Pallas-N Single Channel 80W (Non-Dim) Linear Driver

Product Data Sheet DS1218

Product Feature Map

Bridgelux Pallas-N (Non-Dim) Single Channel 80W Driver provides dynamic constant current output for LED modules and arrays. This driver provides easy-to-adjust Dip-Switches configurable output current and allows for simple integration of Bridgelux's and all major brands White Arrays and Linear modules. Please visit www.bridgelux.com for more information.

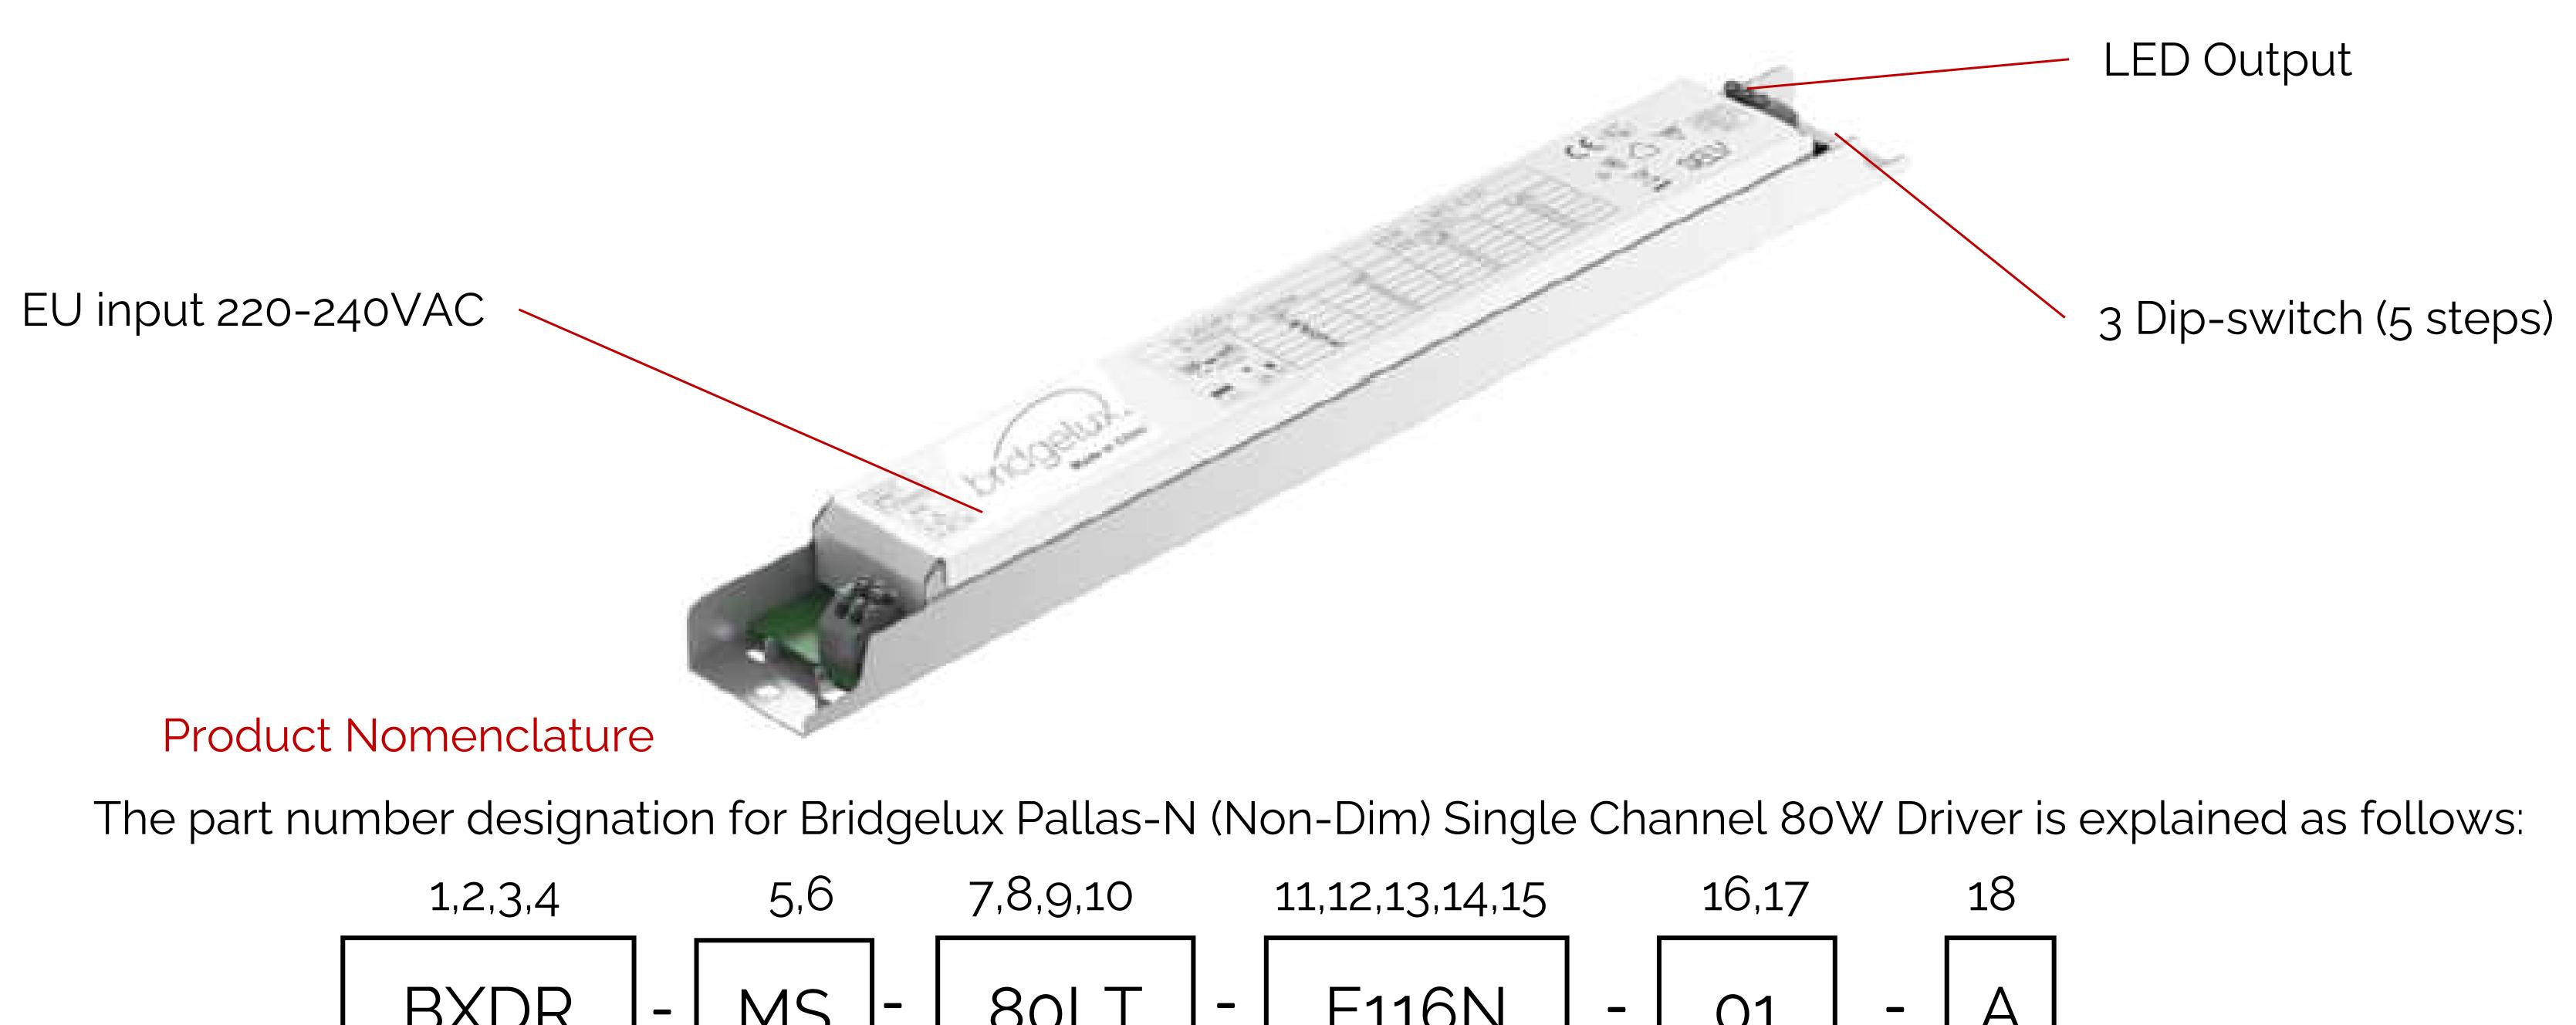

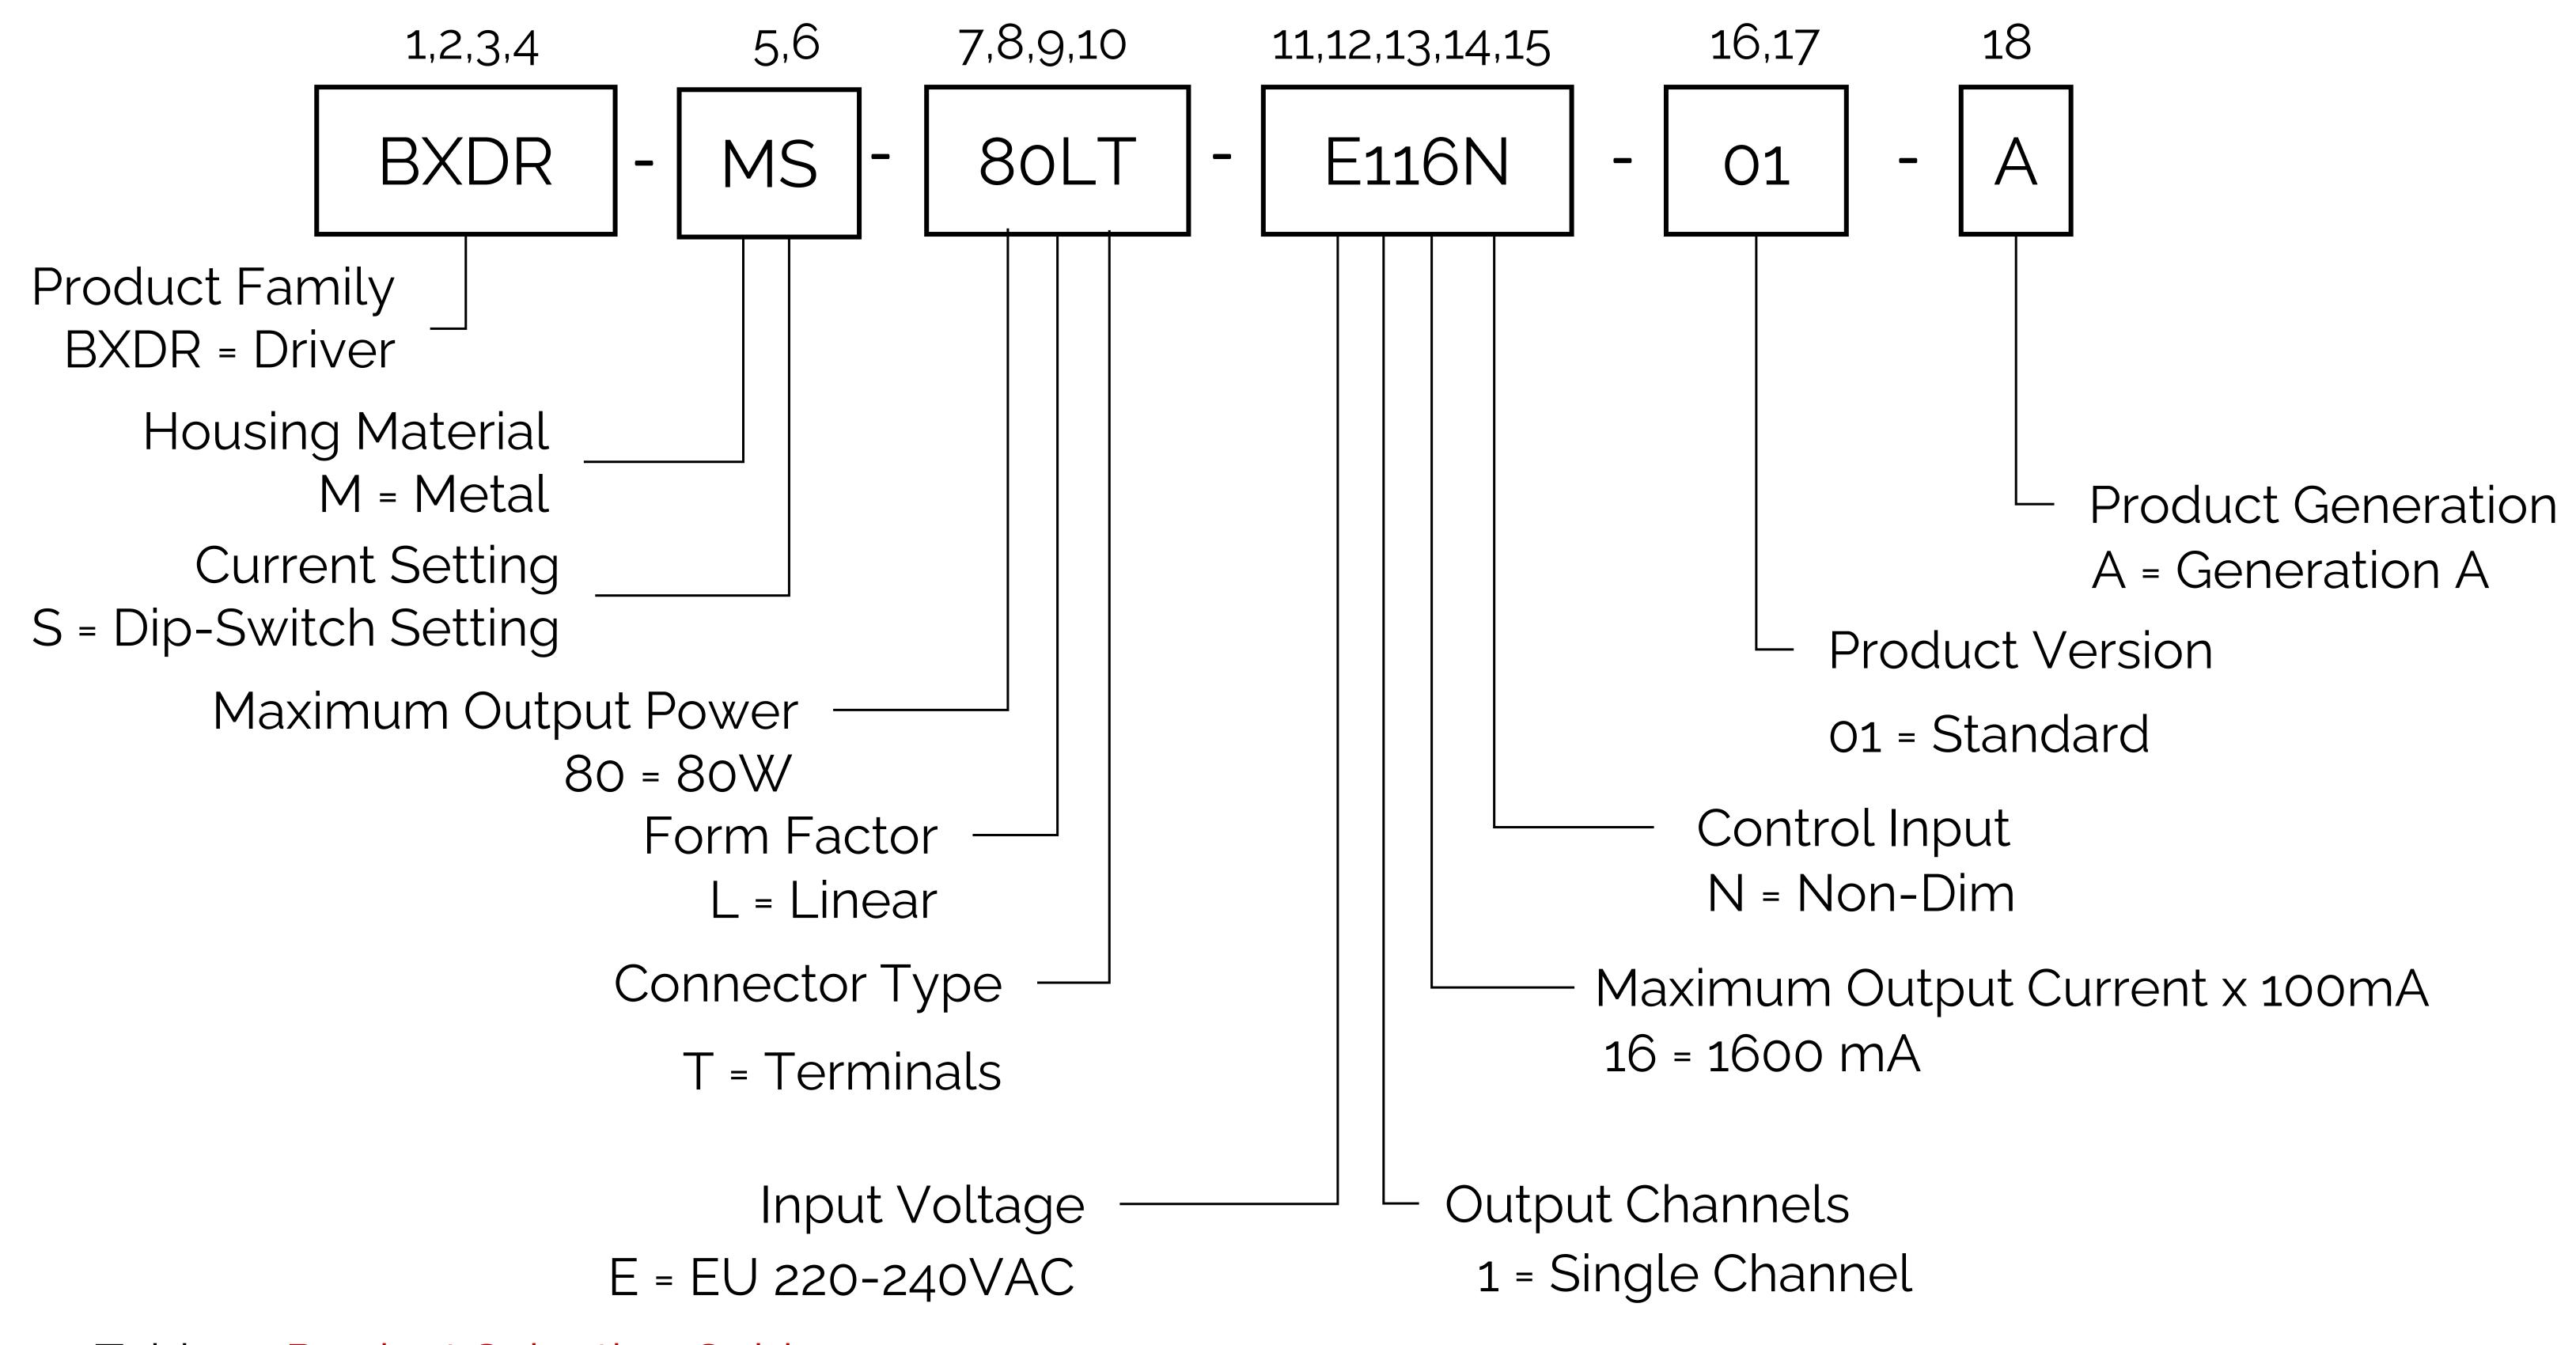


Table 1: Product Selection Guide

Part Number	Configuration
BXDR-MS-80LT-E116N-01-A	Linear Metal with Dip-Switches built-in

Electrical Characteristics

Table 2: Input Electrical Characteristics

Parameter	Unit	Specification
Nominal voltage	V	220 – 240
Nominal frequency	Hz	50 / 60
AC voltage range	V	198 – 264
DC voltage range	V	N/A
Nominal current	A	0.53
Power factor (Full load)		≥ 0.95
THD (Full load)	%	≤ 15
Efficiency (Full load)	%	≥ 90
NO load	W	N/A (Load switching on output side is not permitted)
Protection class		

Table 3: Output Electrical Characteristics

Parameter	Unit			Specification		
Nominal voltage range	V	36-52V	36-52V	36-52V	36-52V	36-50V
Maximum voltage(Open Circuit)	Vdc			≤ 60		
Nominal current	mA	1200	1300	1400	1500	1600
Current accuracy	%			+/-5		
Current ripple LF < 200Hz	%	≤ 3				
Pst LM		≤ 1				
SVM		≤ 0.4				
Maximum power	W	80				
Galvanic isolation:		SELV				

Electrical Characteristics

Figure 1: Typical Operating Window

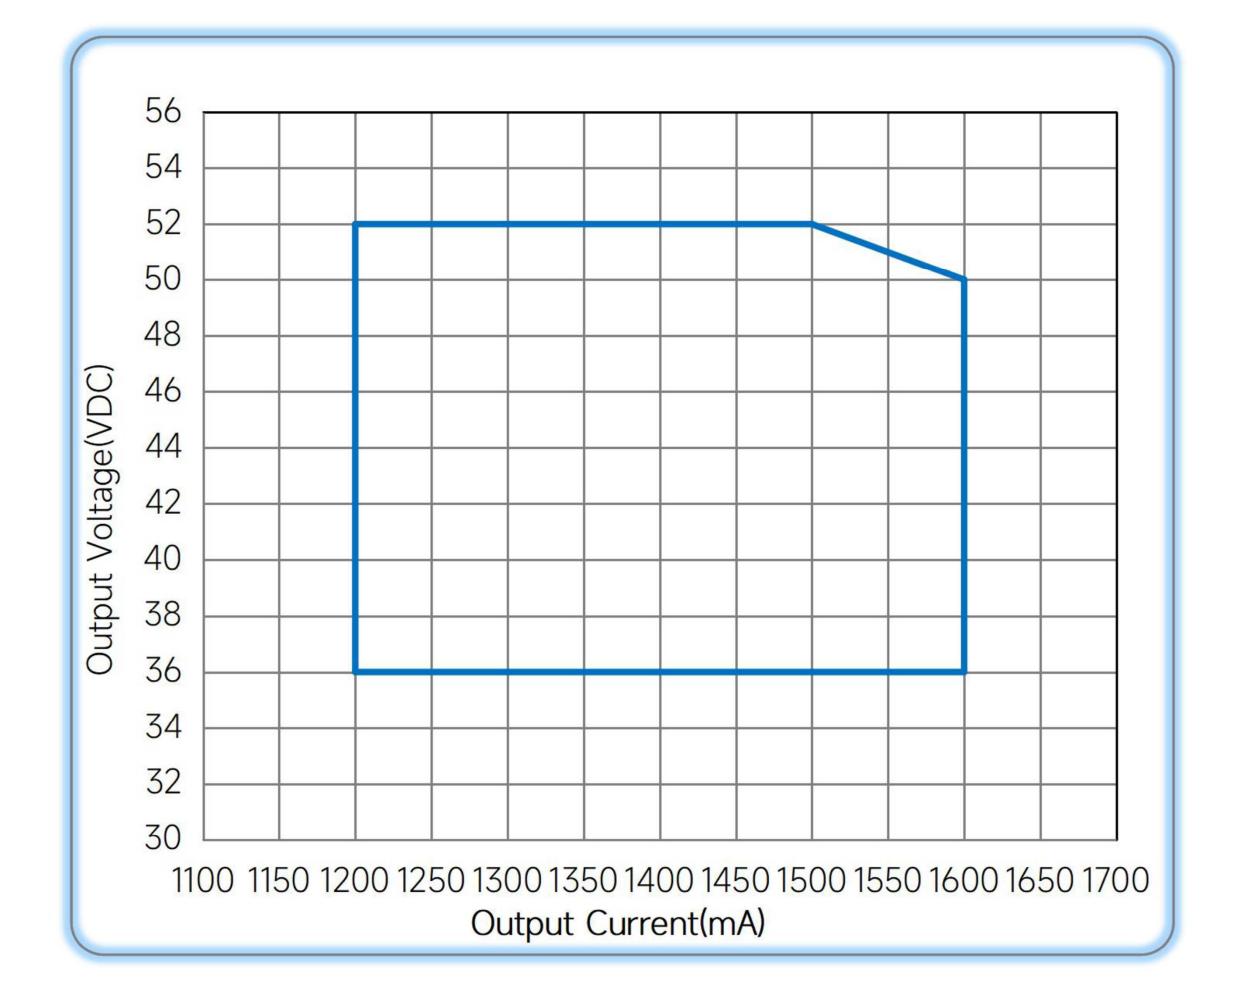


Figure 3: Typical Efficiency vs. Load

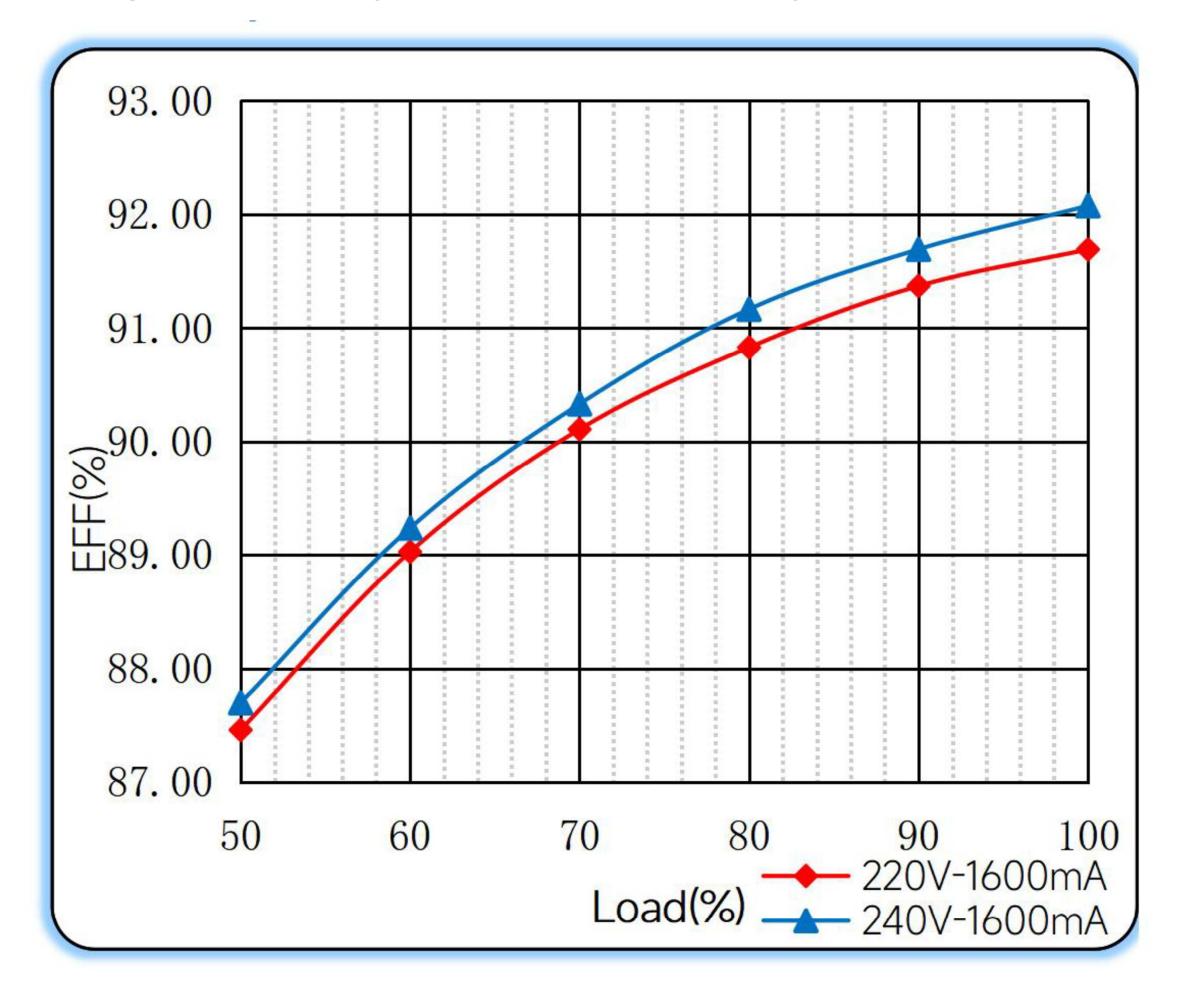


Figure 5: Est. Lifetime vs. Case Temperature

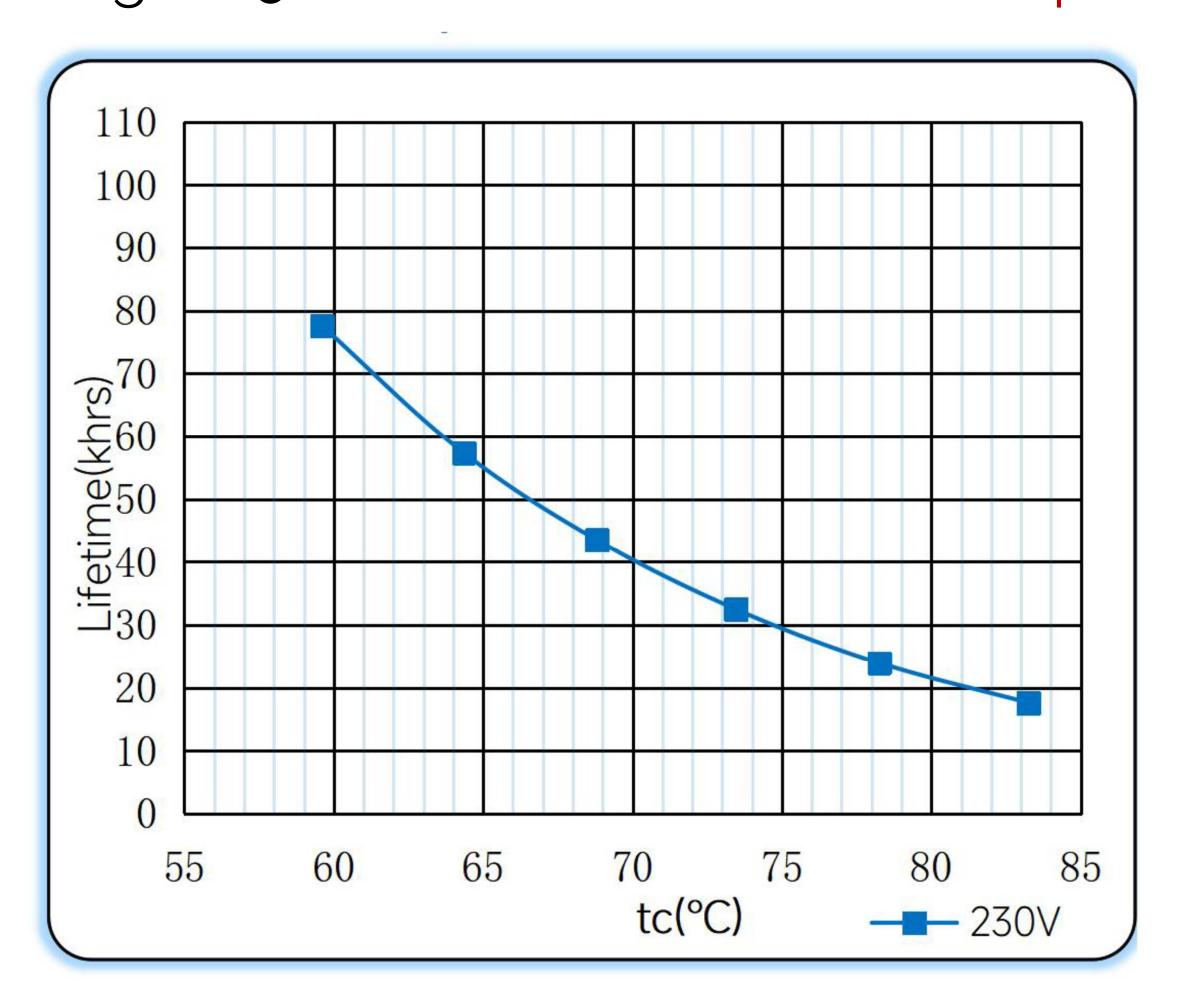


Figure 2: Typical THD vs. Load


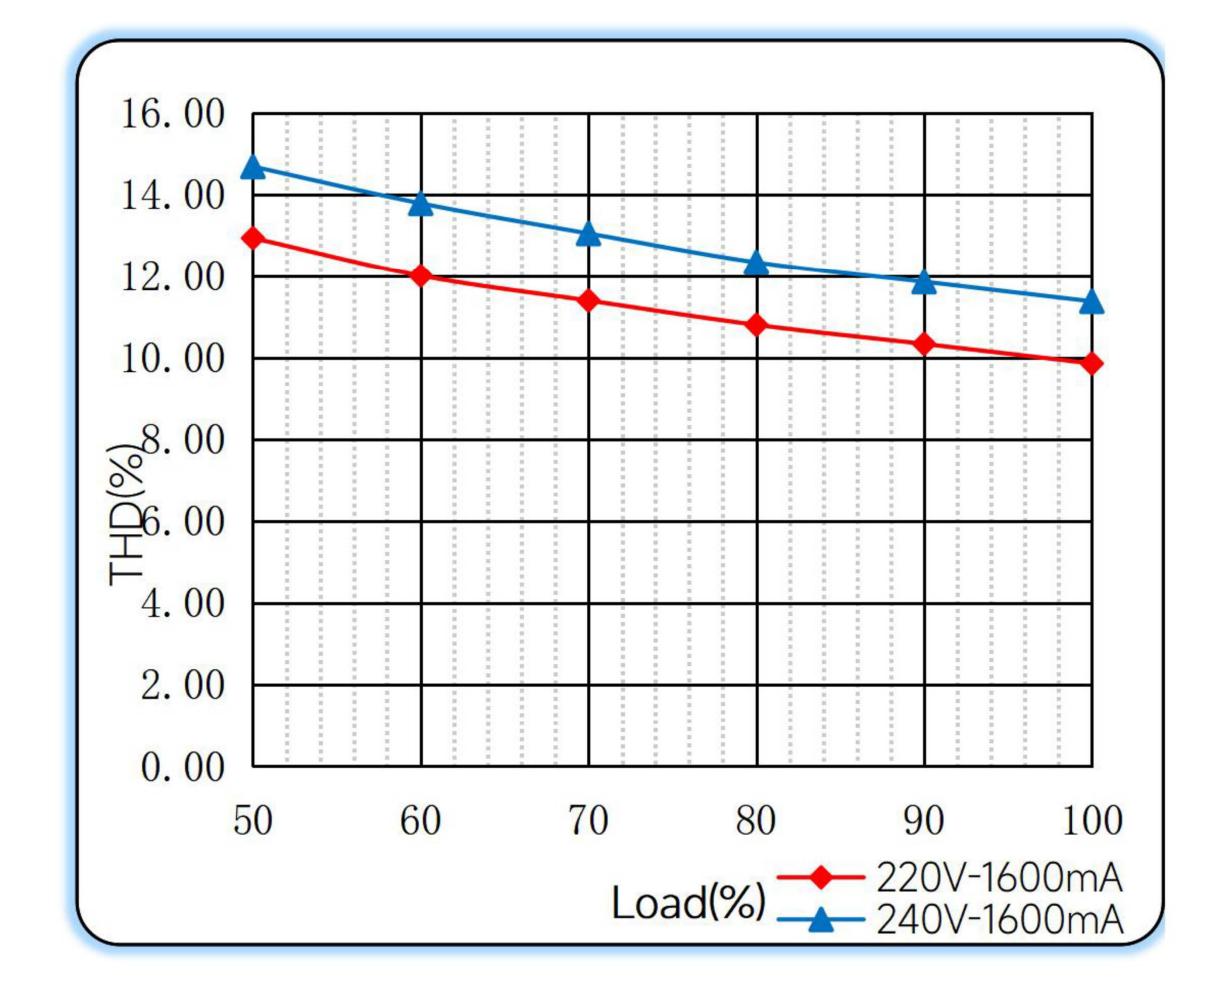


Figure 4: Typical Power Factor vs Load

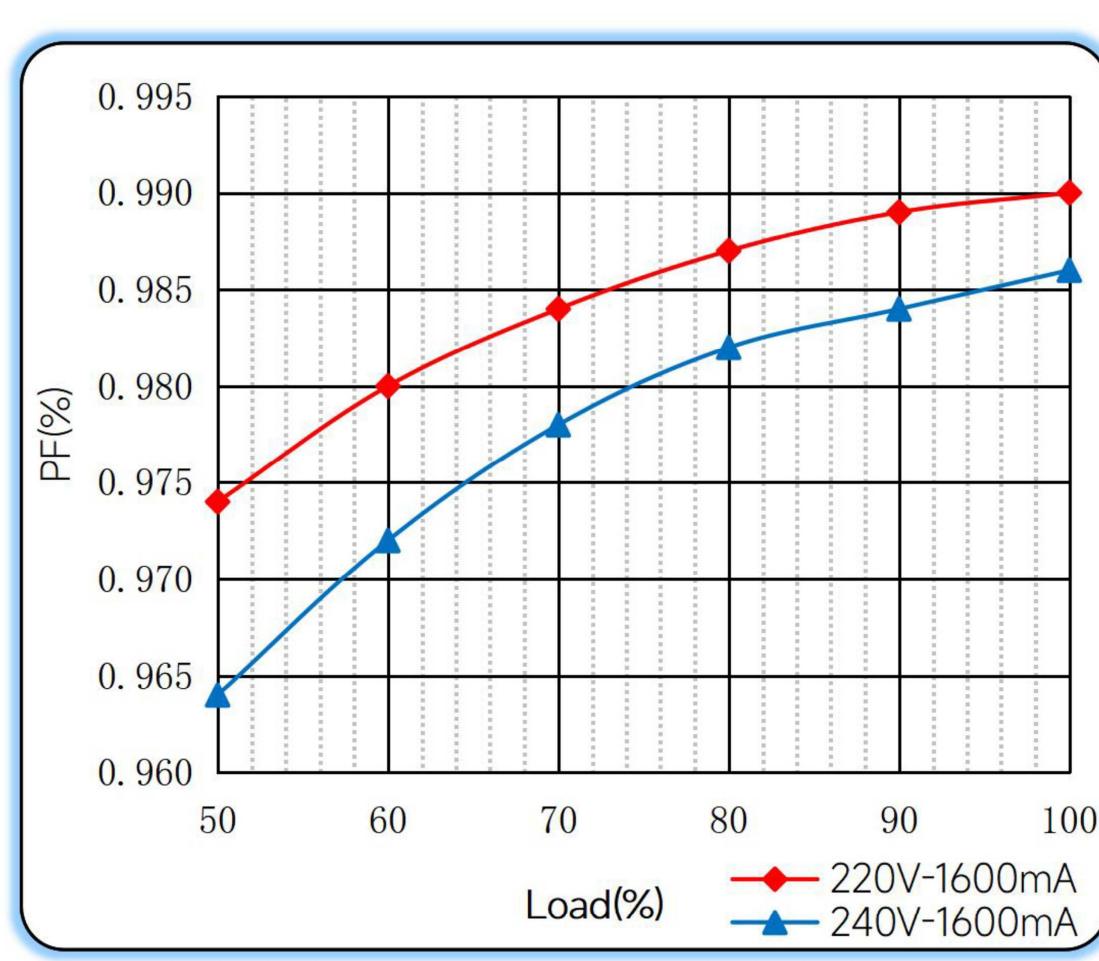


Mechanical Characteristics

Table 4: Product Selection Guide

Characteristics	Specification
Dimensions	280.0 mm (L) x 30.0 mm (W) x 21.0 mm (H)
Enclosure Materials	Steel Metal
Weight	280.0 g
Ingress Protection	IP20

Figure 6: Mechanical Drawing

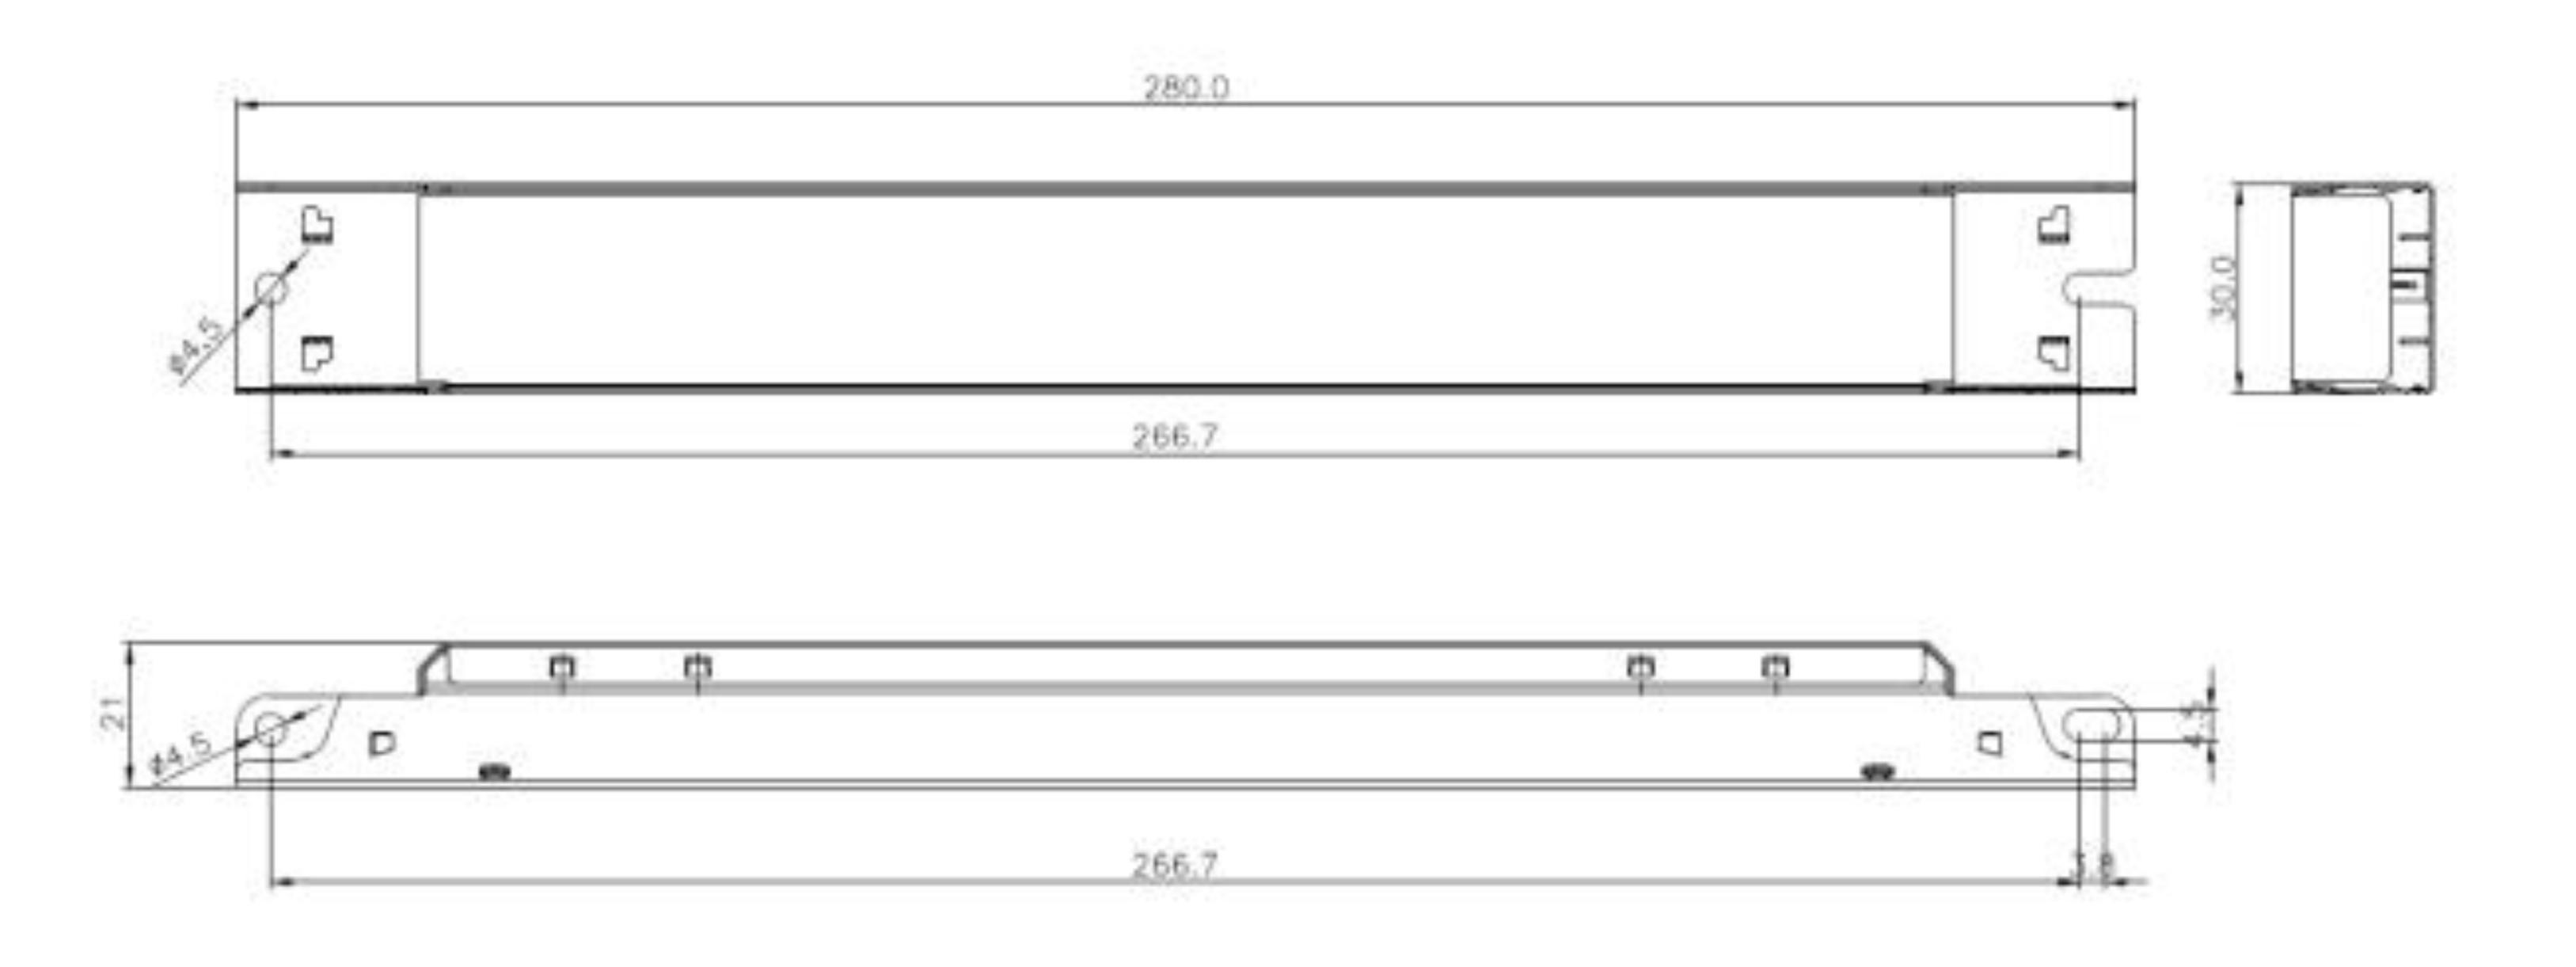

- Notes for Figure 6:

 1. Drawing dimensions are in millimeters

 2. Unless otherwise specified, all linear tolerances are +/-1.0mm.

Wiring Diagram

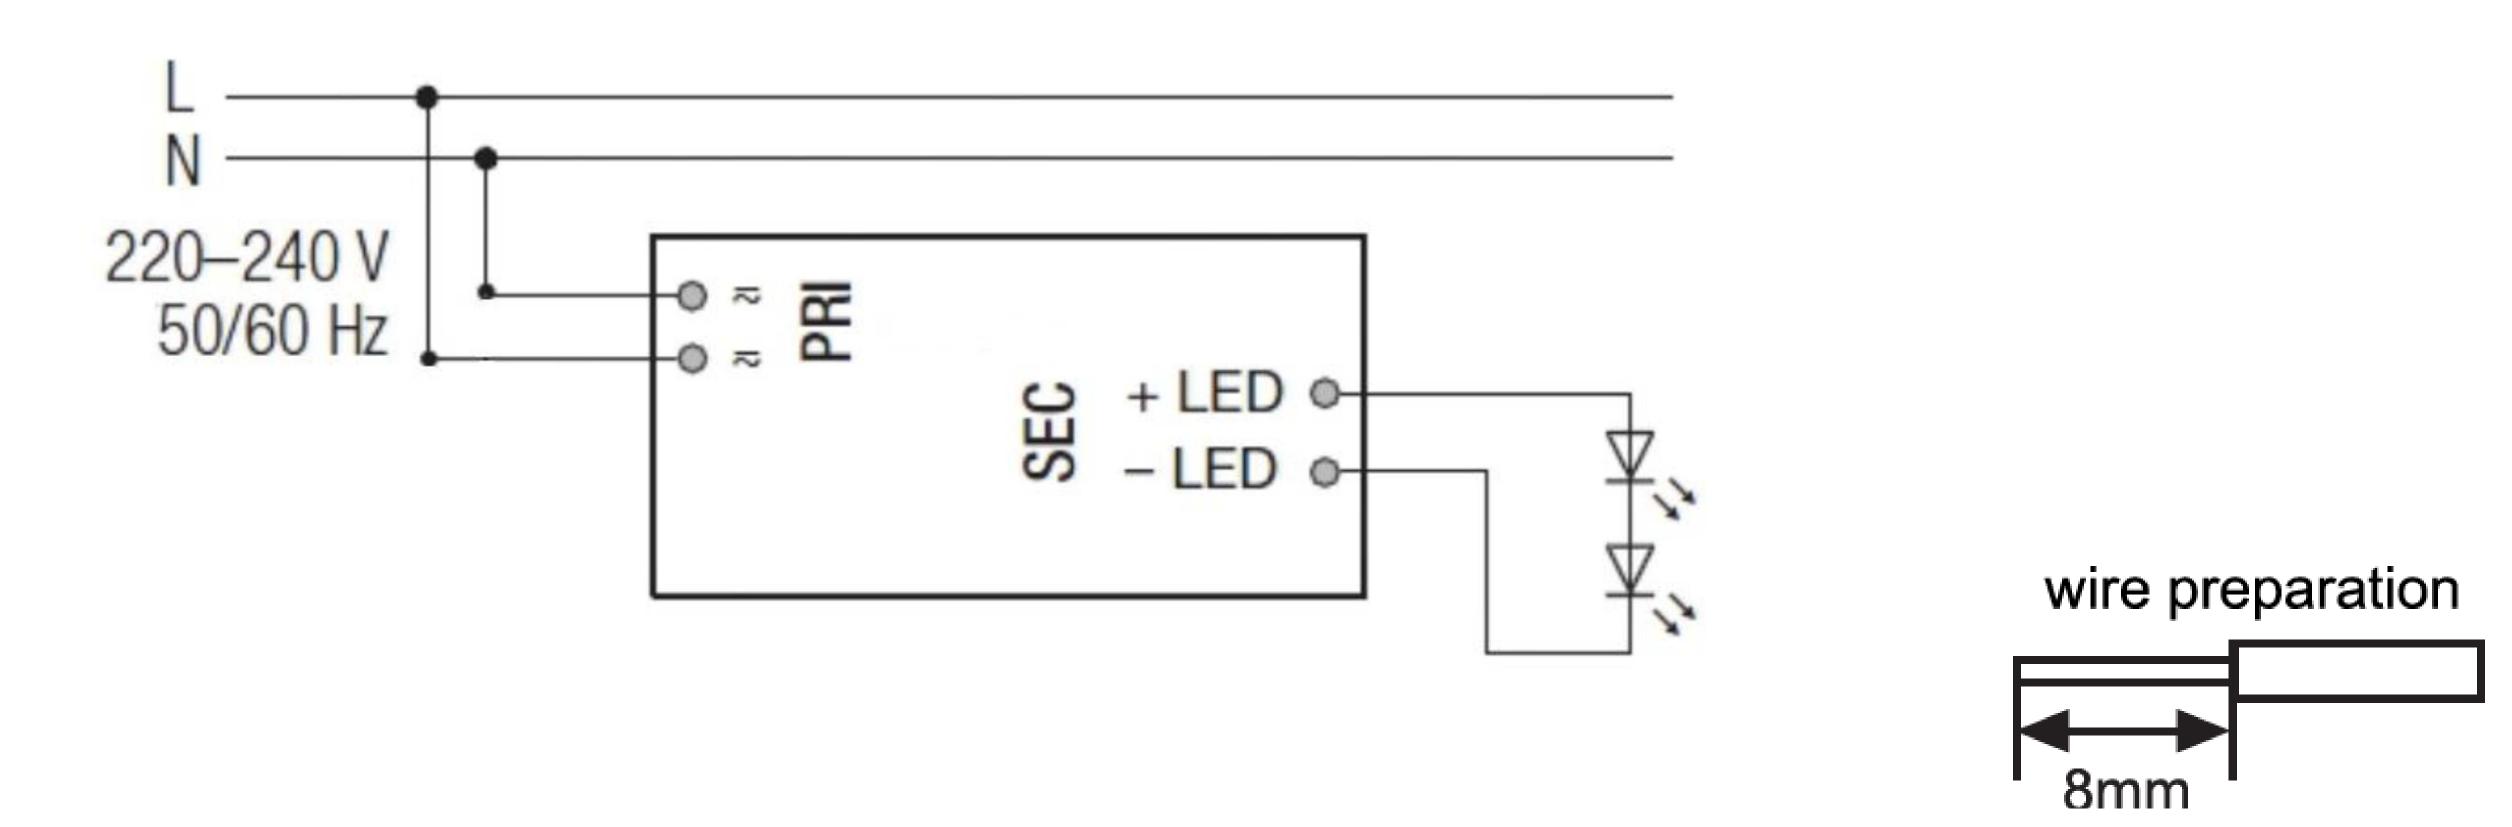


Table 5: Wiring

	Specification item	Value
DDI	Cable cross-section	0.5 – 1.5 mm ² / AWG 20 – 15
PRI	Stripping	7 - 9 mm
СГС	Cable cross-section	0.5 – 1.5 mm ² / AWG 20 – 15
SEC	Stripping	7 - 9 mm

Notes for Table 5:

1. Unless otherwise specified, all linear tolerances are +/-1.0mm

DIP-switch operation instructions & operating window

Table 6: Dip-switch operation instructions & operating window

Dip-switch setting					
1	2	3	U _{out}	out	
OFF	OFF	OFF	36-52V	1200 mA	
OFF	OFF	ON	36-52V	1300 mA	
OFF	ON	OFF	36-52V	1400 mA	
OFF	ON	ON	36-52V	1500 mA	
ON	ON	ON	36-50V	1600mA	

Environmental and Regulatory Standards

Table 7: Environmental Conditions

Parameter	Specification
Ambient Operating Temperature	-20°C to + 50°C
Max. Case Temperature Tc	+75°C (max)
Humidity Rating	Maximum 85% Relative Humidity, non condensing
Storage Temperature	-20°C to + 60°C
Expected Lifetime	> 50,000 hours (Tc < 65°C) , max. 10% failure rate


Table 8: Regulatory Approvals and Compliance

Specification	Reference standard	Condition
Conducted and Radiated EMI	EN 55015:2019+A1:2020 (CISPR 15:2018)	
Harmonic Current Emissions	EN IEC 61000-3-2:2019	
Voltage Fluctuations & Flicker	IEC 61000-3-3:2013+A1:2019	
ESD (Electrostatic Discharge)	IEC 61547:2009 Section 5.2 Test des.: IEC 61000-4-2	4 kV contact discharge, 8 kV air discharge, level 3
Continuous Radiated Disturbance	IEC 61547:2009 Section 5.3 Test des.: IEC 61000-4-3	3 V/m, 80 - 1000 MHz, 80% modulated at distance of 3 meters
Electrical Fast Transient	IEC 61547:2009 Section 5.5 Test des.: IEC 61000-4-4	± 1 kV on AC power port for 1 minute,
Surge	IEC 61547 Section 5.7 Test des.: IEC 61000-4-5	± 1 kV (differential mode) ± 2 kV (common mode)
Continuous Conducted Disturbance	IEC 61547:2009 Section 5.6 Test des.: IEC 61000-4-6	3V, 0.15-80 MHz, 80% modulated, Level 2
Voltage Dips	IEC 61547 Section 5.8, 5.9 Test des.: IEC 61000-4-11	70% dip during 25 cycles @ 50Hz, 30 cycles @ 60Hz 0% dip during ½ cycles

Regulatory Standards (continued)

Table 9: Safety Agency Approvals

Specification	Reference standard	Condition
ENEC / CE / UKCA	EN 61347-1:2015, EN 61347-2-13:2014+A1	ENEC Certification pending

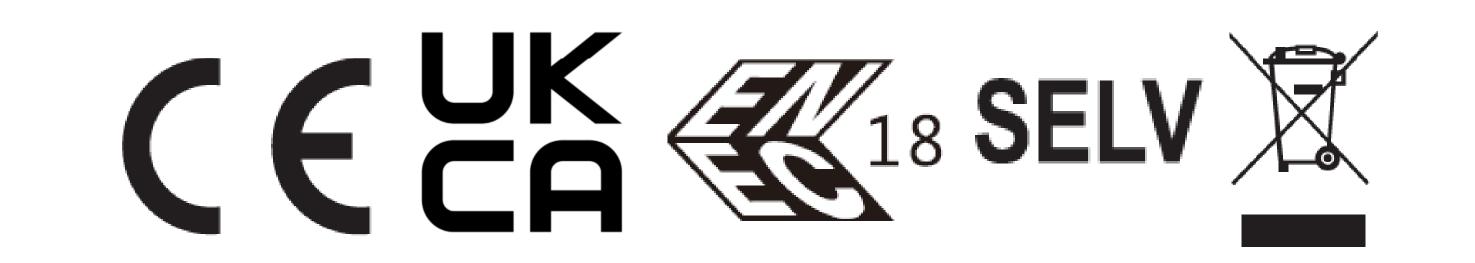

Design Resources

Application Notes

Please contact your Bridgelux sales representative for assistance on obtaining application support when designing with the Bridgelux Pallas-N Single Channel Driver. For a list of available resources, visit www.bridgelux.com.

Precautions

CAUTION: PRODUCT HANDLING

Handle the Pallas-N Single Channel Driver with care to prevent any damage from mechanical shock It is recommended to handle this driver in a static-free environment

To maintain product warranty, the product must not be opened or disassembled and the installer must ensure that the driver's operating conditions do not exceed the maximum conditions stated within this data sheet.

CAUTION: PRODUCT INSTALLATION

Incorrect installation of the Pallas-N Single Channel Driver can cause irreparable damage to the driver, connected LEDs.

Pay attention when connecting the LED load and observe the correct polarity of the output terminals as specified in this data sheet and on the driver label. Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs.

CAUTION: ELECTRIC SHOCK

Be aware of the possibility of an electric shock hazard which can result in serious injury or death. Disconnect power before servicing or installing this device.

Disclaimers

MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

About Bridgelux: Bridging Light and LifeTM

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

For more information about the company, please visit bridgelux.com
twitter.com/Bridgelux
facebook.com/Bridgelux
youtube.com/user/Bridgelux
linkedin.com/company/bridgelux
WeChat ID: BridgeluxInChina



46410 Fremont Blvd
Fremont, CA 94538 USA
Tel (925) 583-8400
www.bridgelux.com