




Bridgelux® SMD 3030 0.2W 3V

Product Data Sheet DS1725

Introduction

SMD 3030

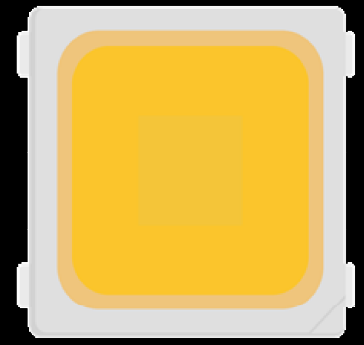

Features

- Industry-standard 3030 footprint
- Enables 3- and 6-step MacAdam ellipse custom binning kits
- RoHS compliant and lead -
- Multiple CCT configurations for a wide range of lighting applications
- High efficacy solution

Benefits

- Lower operating and manufacturing cost
- Ease of design and rapid go-to-market
- Uniform, consistent white light
- Reliable and constant white point
- Compliant with environmental standards
- Design flexibility
- Horticultural Lighting applications

Contents

Product Feature Map	2
Product Nomenclature	2
Product Selection Guide	3
Electrical Characteristics	4
PPF&PPE Characteristics	6
Absolute Maximum Ratings	6
Product Bin Definitions	7
Performance Curves	10
Typical Radiation Pattern	13
Typical Color Spectrum	14
Mechanical Dimensions	15
Reliability	16
Reflow Characteristics	17
Packaging	18
Design Resources	20
Precautions	20
Disclaimers	20
About Bridgelux	21

Product Selection Guide

The following product configurations are available:

Table 1: Selection Guide, Pulsed Measurement Data at 65mA ($T_j = T_{sp} = 25^\circ\text{C}$)

Part Number ^{2,6}	Nominal CCT ² (K)	CRI ^{3,5}	Nominal Drive Current (mA)	Forward Voltage ^{4,5} (V)			Typical PPF($\mu\text{mol/s}$) ^{4,5}	Typical Power (W)	Typical PPE($\mu\text{mol/J}$) ^{4,5}
				Min	Typical	Max			
BXEM-27K-11L-3FH-00-0-0	2700	-	65	2.65	2.80	2.85	0.54	0.18	2.96
BXEM-30K-11L-3FH-00-0-0	3000	-	65	2.65	2.80	2.85	0.55	0.18	3.00
BXEM-35K-11L-3FH-00-0-0	3500	-	65	2.65	2.80	2.85	0.55	0.18	3.00
BXEM-40K-11L-3FH-00-0-0	4000	-	65	2.65	2.80	2.85	0.55	0.18	3.00
BXEM-50K-11L-3FH-00-0-0	5000	-	65	2.65	2.80	2.85	0.56	0.18	3.07
BXEM-57K-11L-3FH-00-0-0	5700	-	65	2.65	2.80	2.85	0.56	0.18	3.07
BXEM-65K-11L-3FH-00-0-0	6500	-	65	2.65	2.80	2.85	0.57	0.18	3.14
BXEM-75K-11L-3FH-00-0-0	7500	-	65	2.65	2.80	2.85	0.57	0.18	3.14
BXEM-92K-11L-3FH-00-0-0	9200	-	65	2.65	2.80	2.85	0.57	0.18	3.14

Table 2: Selection Guide, Pulsed Test Performance ($T_{sp} = 85^\circ\text{C}$)^{7,8}

Part Number ^{2,6}	Nominal CCT ² (K)	CRI ^{3,5}	Nominal Drive Current (mA)	Forward Voltage ^{4,5} (V)			Typical PPF($\mu\text{mol/s}$) ^{4,5}	Typical Power (W)	Typical PPE($\mu\text{mol/J}$) ^{4,5}
				Min	Typical	Max			
BXEM-27K-11L-3FH-00-0-0	2700	-	65	2.55	2.70	2.75	0.50	0.18	2.85
BXEM-30K-11L-3FH-00-0-0	3000	-	65	2.55	2.70	2.75	0.51	0.18	2.92
BXEM-35K-11L-3FH-00-0-0	3500	-	65	2.55	2.70	2.75	0.51	0.18	2.92
BXEM-40K-11L-3FH-00-0-0	4000	-	65	2.55	2.70	2.75	0.51	0.18	2.92
BXEM-50K-11L-3FH-00-0-0	5000	-	65	2.55	2.70	2.75	0.53	0.18	3.02
BXEM-57K-11L-3FH-00-0-0	5700	-	65	2.55	2.70	2.75	0.53	0.18	3.02
BXEM-65K-11L-3FH-00-0-0	6500	-	65	2.55	2.70	2.75	0.54	0.18	3.09
BXEM-75K-11L-3FH-00-0-0	7500	-	65	2.55	2.70	2.75	0.54	0.18	3.09
BXEM-92K-11L-3FH-00-0-0	9200	-	65	2.55	2.70	2.75	0.54	0.18	3.09

Notes for Tables 1 & 2:

- The last 6 characters (including hyphens '-') refer to PPF bins, forward voltage bins, and color bin options, respectively. "00-0-0" denotes the full distribution of Flux, forward voltage, and color bin.
Example: BXEM-40K-11L-3FH-00-0-0 refers to the full distribution of PPF, forward voltage, and color within a 4000K 6-step ANSI standard CRI is -, 1 die configuration, low power, 2.76V typical forward voltage.
- Product CCT is the nominal CCT at $T_{sp} = 85^\circ\text{C}$ as defined by ANSI C78.377-2011.
- Listed CRIs are -.
- Products tested under pulsed condition (10ms pulse width) at nominal drive current.
- Bridgelux maintains a $\pm 7.5\%$ tolerance on luminous PPF measurements, $\pm 0.1\text{V}$ tolerance on forward voltage measurements.
- Refer to Table 6 and Table 7 for Bridgelux SMD 3030 Luminous PPF Binning and Forward Voltage Binning information.
- Typical pulsed test performance values are provided as reference only and are not a guarantee of performance.
- Typical performance is estimated based on operation under pulsed current with LED emitter mounted onto a heat sink with thermal interface material and the solder point temperature maintained at 85°C . Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and the exposed environment to which the product is subjected.
- In order to ensure the accuracy of the test by Everfine sphere the test model suggest to use conventional test preheat for 30ms integrating time for 20ms. If using pulse model, pulse width suggest to use IP 80-90%. Hot cold test must use conventional test and wavelength accuracy is required to be 1nm. The test conditions must be fixed.

Electrical Characteristics

Table 3: SMD 3030 LEDs specifications at nominal drive current are shown in Table 1 and Table 2. SMD 3030 may also be driven at other drive currents dependent on specific application design requirements. The performance at any drive current can be derived from the current vs. voltage characteristics shown in Figure 2 and the relative PPF vs. current characteristics shown in Figure 3. The performance at commonly used drive currents is summarized in Table 3.

Table 3: Performance at Commonly Used Drive Currents

Part Number	CRI	Drive Current (mA)	Typical Vf(V) Tsp = 25°C	Typical Power (W) Tsp = 25°C	Typical Pulsed PPF(umol/s) ^{±2} Tsp=25°C	Typical Pulsed PPF (umol/s) ^{±2} Tsp=85°C	Typical PPE (umol/J) Tsp = 25°C
BXEM-27K-11L-3FH-00-0-0	-	5	2.63	0.01	0.04	0.04	3.09
		20	2.70	0.05	0.17	0.15	3.06
		65	2.80	0.18	0.54	0.50	2.96
		100	2.85	0.29	0.84	0.78	2.94
		150	2.94	0.44	1.21	1.12	2.74
		200	3.01	0.60	1.59	1.48	2.64
BXEM-30K-11L-3FH-00-0-0 BXEM-35K-11L-3FH-00-0-0 BXEM-40K-11L-3FH-00-0-0	-	5	2.63	0.01	0.04	0.04	3.23
		20	2.70	0.05	0.17	0.16	3.13
		65	2.80	0.18	0.55	0.51	3.00
		100	2.85	0.29	0.84	0.79	2.96
		150	2.94	0.44	1.21	1.14	2.75
		200	3.01	0.60	1.60	1.50	2.65
BXEM-50K-11L-3FH-00-0-0 BXEM-57K-11L-3FH-00-0-0	-	5	2.63	0.01	0.04	0.04	3.32
		20	2.70	0.05	0.17	0.17	3.23
		65	2.80	0.18	0.56	0.53	3.07
		100	2.85	0.29	0.86	0.82	3.03
		150	2.94	0.44	1.25	1.19	2.84
		200	3.01	0.60	1.66	1.58	2.76
BXEM-65K-11L-3FH-00-0-0 BXEM-75K-11L-3FH-00-0-0 BXEM-92K-11L-3FH-00-0-0	-	5	2.63	0.01	0.04	0.04	3.30
		20	2.70	0.05	0.18	0.17	3.29
		65	2.80	0.18	0.57	0.54	3.14
		100	2.85	0.29	0.88	0.84	3.10
		150	2.94	0.44	1.28	1.21	2.90
		200	3.01	0.60	1.71	1.62	2.83

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7.5% tolerance on PPF measurements.
3. Typical pulsed performance values are provided as reference only and are not a guarantee of performance.

Table 4: Electrical Characteristics

Part Number ¹	Drive Current (mA)	Forward Voltage (V) ^{1,2}			Typical Temperature Coefficient of Forward Voltage $\Delta V_f / \Delta T$ (mV/°C)	Typical Thermal Resistance Junction to Solder Point ³ R_{j-sp} (°C/W)
		Minimum	Typical	Maximum		
BXEM-xxK-11L-3FH-00-0-0	65	2.65	2.80	2.85	-1.03	7.5

Notes for Table 4:

1. Bridgelux maintains a tolerance of $\pm 0.1V$ on forward voltage measurements. Voltage minimum and maximum values at the nominal drive current are guaranteed by 100% test.
2. Products tested under pulsed condition (10ms pulse width) at nominal drive current where $T_{sp} = 25^{\circ}C$.
3. Thermal resistance value was calculated using total electrical input power; optical power was not subtracted from input power.

Absolute Maximum Ratings

Table 6: Maximum Ratings

Parameter	Maximum Rating
LED Junction Temperature (T_j)	125°C
Storage Temperature	-40°C to +105°C
Operating Solder Point Temperature (T_{sp})	-40°C to +105°C
Soldering Temperature	260°C or lower for a maximum of 10 seconds
Maximum Drive Current	200mA
Maximum Peak Pulsed Forward Current ¹	300mA
Maximum Reverse Voltage ²	-
Moisture Sensitivity Rating	MSL 3
Electrostatic Discharge	8kV HBM. JEDEC-JS-001-HBM and JEDEC-JS-001-2012

Notes for Table 6:

1. Bridgelux recommends a maximum duty cycle of 10% and pulse width of 10 ms when operating LED SMD at maximum peak pulsed current specified. Maximum peak pulsed current indicate values where LED SMD can be driven without catastrophic failures.
2. Light emitting diodes are not designed to be driven in reverse voltage and will not produce light under this condition. no rating is provided

Table 7 : lists the standard photometric luminous bins for Bridgelux SMD 3030 LEDs. Although several bins are listed, product availability in a particular bin varies by production run and by product performance. Not all bins are available in all CCTs.

Table 7: Luminous PPF Bin Definitions at 65mA, $T_{sp}=25^\circ\text{C}$

Bin Code	Minimum	Maximum	Unit	Condition
1J	0.50	0.53	umol/s	$I_F=65\text{mA}$
1K	0.53	0.56		
1L	0.56	0.59		

Note for Table 7:

1. Bridgelux maintains a tolerance of $\pm 7.5\%$ on luminous PPF measurements.

Table 8: Forward Voltage Bin Definition at 65mA, $T_{sp}=25^\circ\text{C}$

Bin Code	Minimum	Maximum	Unit	Condition
8	2.6	2.7	V	$I_F=65\text{mA}$
9	2.7	2.8		
A	2.8	2.9		

Note for Table 8:

1. Bridgelux maintains a tolerance of $\pm 0.1\text{V}$ on forward voltage measurements.

Product Bin Definitions

Table 9: MacAdam Ellipse Color Bin Definitions


CCT	Color Space	Center Point		Major Axis	Minor Axis	Ellipse Rotation Angle	Color Bin
		X	Y				
2700K	3 SDCM	0.4578	0.4101	0.0081	0.0042	53.70	1
	6 SDCM	0.4578	0.4101	0.0162	0.0084	53.70	1/A/B/C/D
3000K	3 SDCM	0.4338	0.4030	0.00834	0.00408	53.22	1
	6 SDCM	0.4338	0.4030	0.01668	0.00816	53.22	1/A/B/C/D
3500K	3 SDCM	0.4078	0.3930	0.00834	0.00408	54.00	1
	6 SDCM	0.4078	0.3930	0.01668	0.00816	54.00	1/A/B/C/D
4000K	3 SDCM	0.3818	0.3797	0.00939	0.00402	53.72	1
	6 SDCM	0.3818	0.3797	0.01878	0.00804	53.72	1/A/B/C/D
5000K	3 SDCM	0.3447	0.3553	0.00822	0.00354	59.62	1
	6 SDCM	0.3447	0.3553	0.01644	0.00708	59.62	1/A/B/C/D
5700K	3 SDCM	0.3287	0.3417	0.00746	0.00320	59.09	1
	6 SDCM	0.3287	0.3417	0.01492	0.0064	59.09	1/A/B/C/D
6500K	3 SDCM	0.3123	0.3282	0.00669	0.00285	58.57	1
	6 SDCM	0.3123	0.3282	0.01338	0.0057	58.57	1/A/B/C/D
7500K	3 SDCM	0.2984	0.3133	0.00669	0.00285	65.65	1
	6 SDCM	0.2984	0.3133	0.01338	0.0057	65.65	1/A/B/C/D
9200K Mint	3 SDCM	0.2774	0.3396	0.01000	0.0031	65.28	1
	6 SDCM	0.2774	0.3396	0.01998	0.00612	65.28	1/A/B/C/D

Notes for Table 9:

1. Color binning at $T_{sp} = 85^{\circ}\text{C}$ unless otherwise specified.
2. Bridgelux maintains a tolerance of ± 0.007 on x and y color coordinates in the CIE 1931 color space.




Product Bin Definitions

Figure 1: C.I.E. 1931 Chromaticity Diagram (5 Color Bin Structure, Hot-color Targeted at $T_{sp}=85^{\circ}\text{C}$)

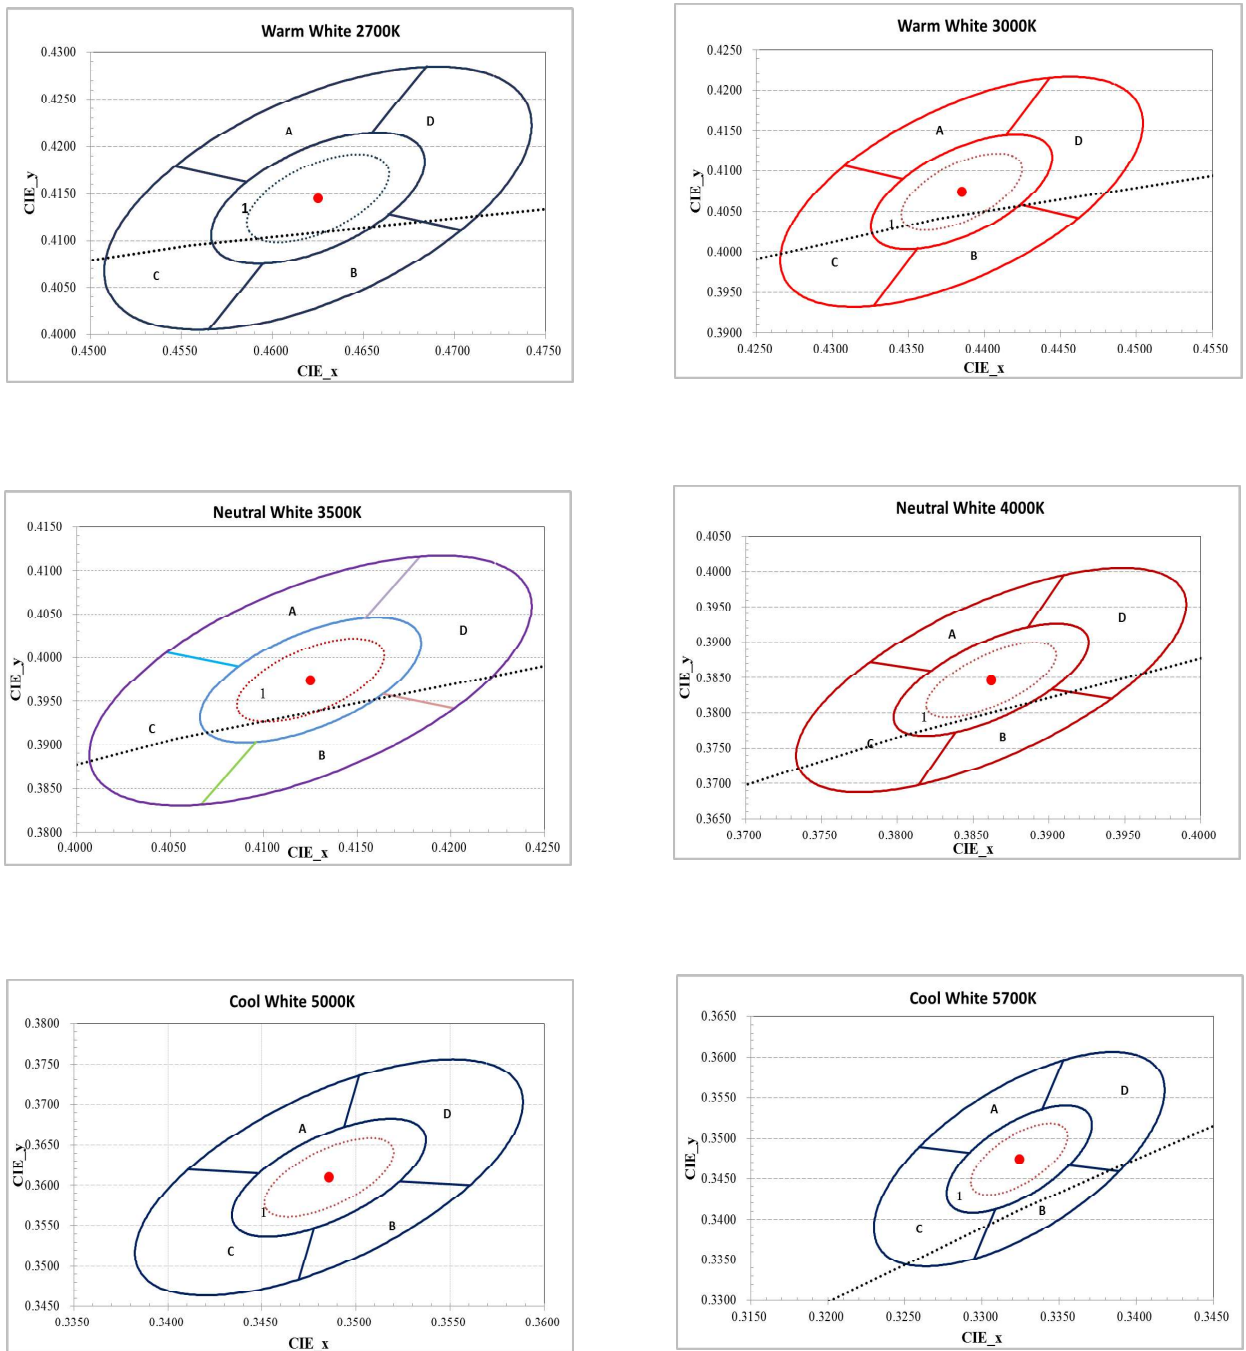

Product Bin Definitions

Figure 1: C.I.E. 1931 Chromaticity Diagram (5 Color Bin Structure, Hot-color Targeted at $T_{sp} = 85^{\circ}\text{C}$)

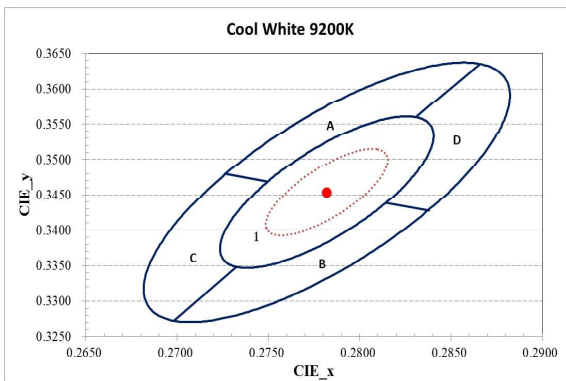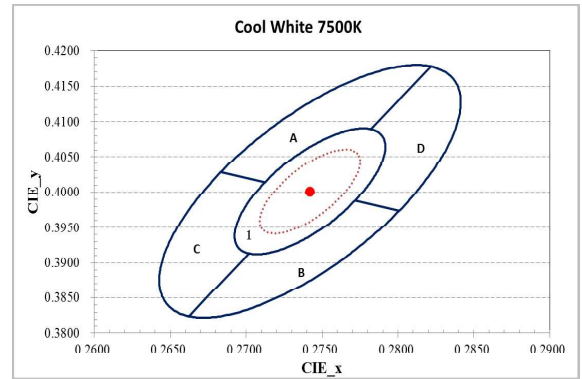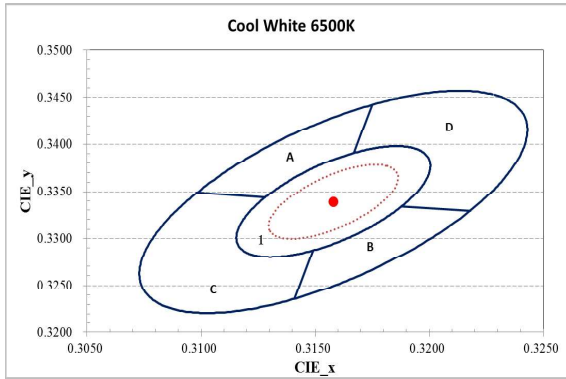

Performance Curves

Figure 2: Drive Current vs. Forward Voltage ($T_{sp}=25^{\circ}\text{C}$)


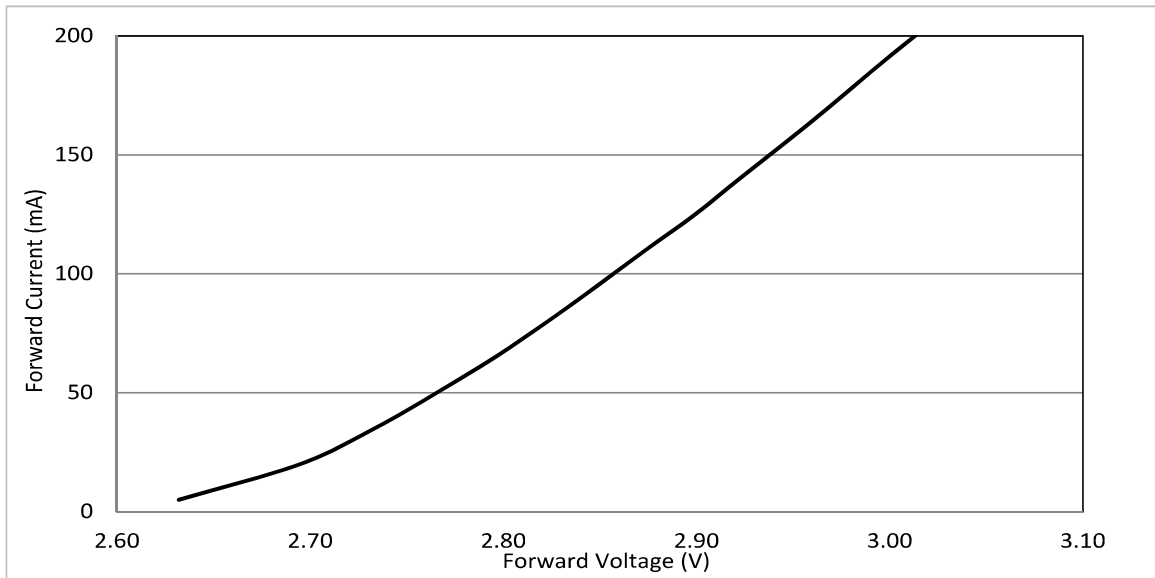


Figure 3: Typical Relative Luminous PPF vs. Forward Current ($T_{sp}=25^{\circ}\text{C}$)

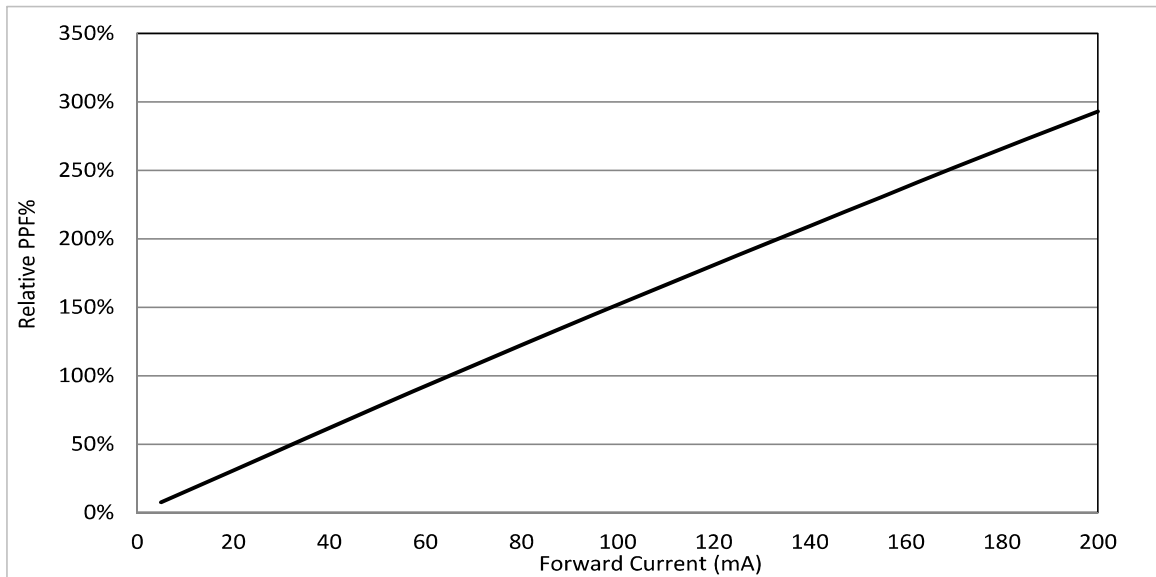

Note for Figure 3:

1. Pulse width modulation (PWM) is recommended for dimming effects.

Performance Curves

Figure 4: Typical Relative PPF vs. Solder Point Temperature


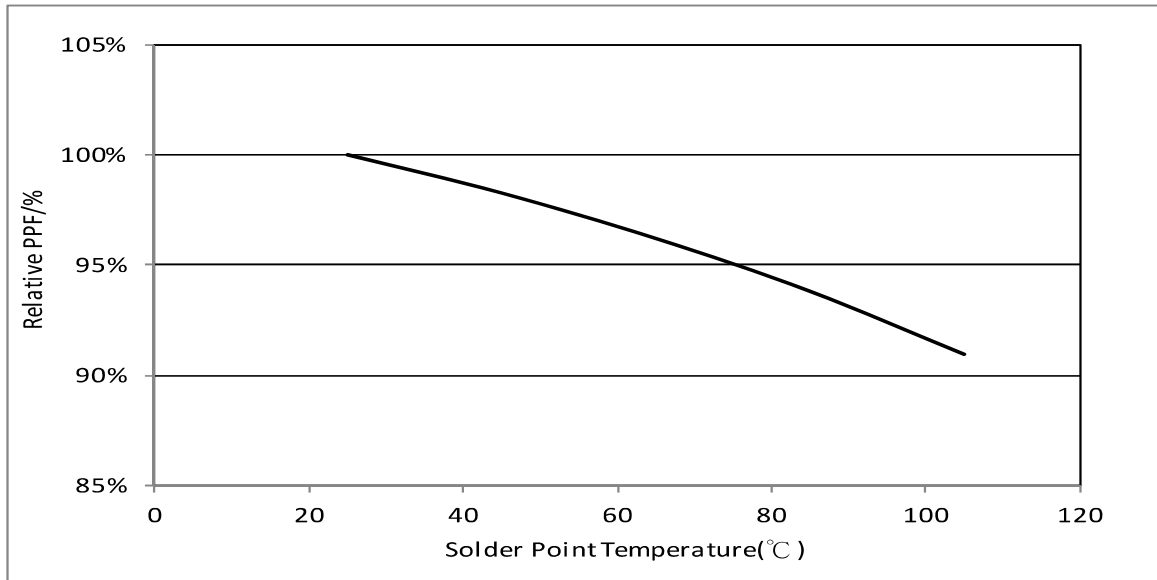


Figure 5: Typical ccx Shift vs. Solder Point Temperature

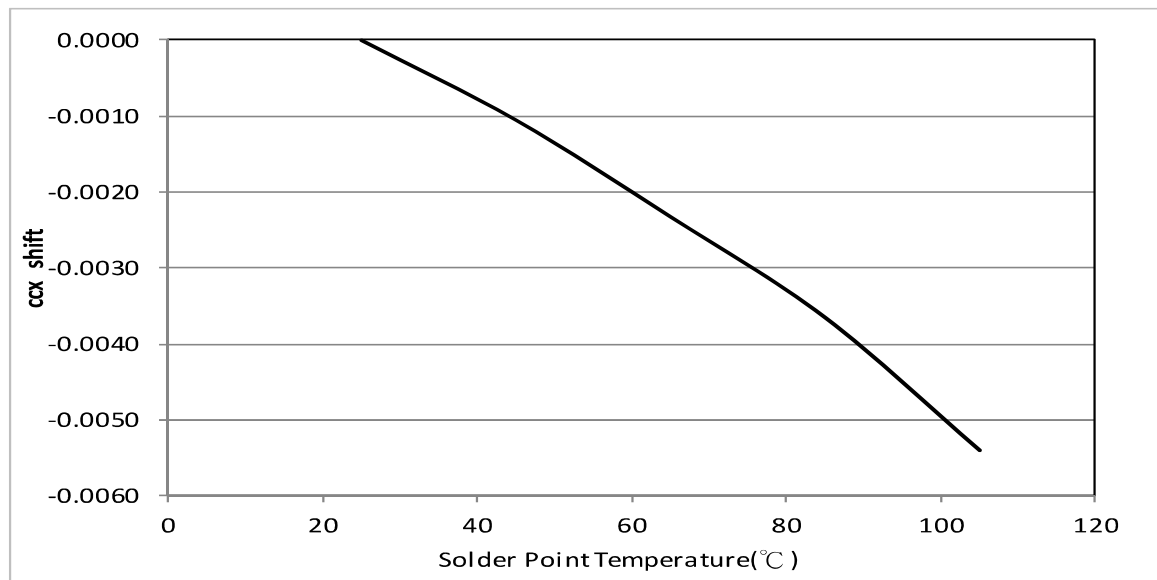


Notes for Figures 4 & 5:

1. Characteristics shown for neutral white based on 4000K .
2. For other color SKUs, the shift in color will vary. Please contact your Bridgelux Sales Representative for more information

Performance Curves


Figure 6: Typical ccy Shift vs. Solder Point Temperature

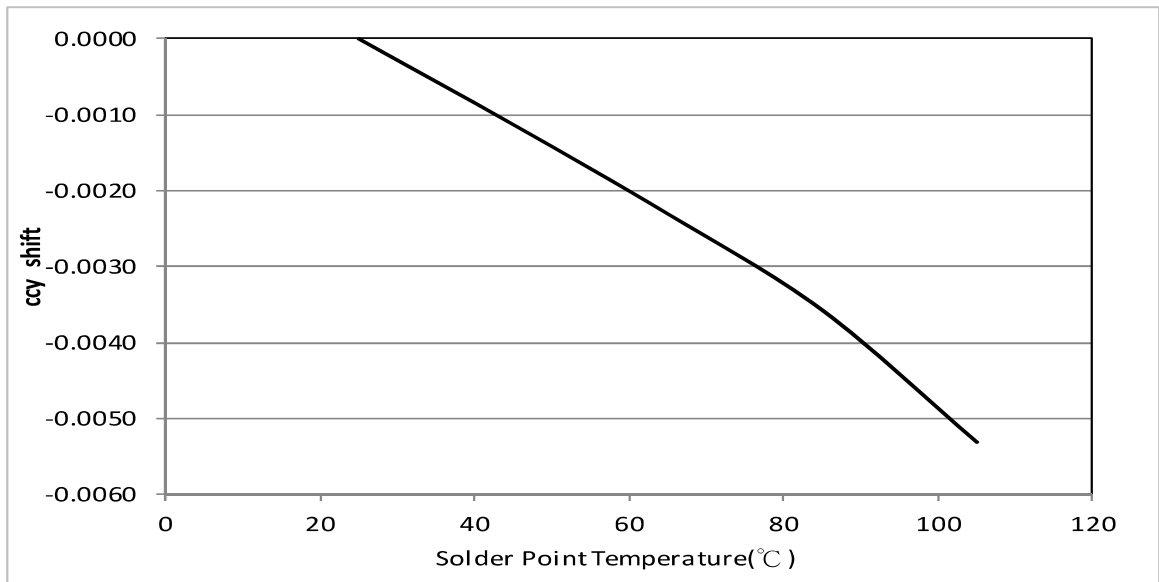

Notes for Figure 6:


1. Characteristics shown for neutral white based on 4000K.
2. For other color SKUs, the shift in color will vary. Please contact your Bridgelux Sales Representative for more information.

Figure 7: Drive Current vs Solder Point Temperature

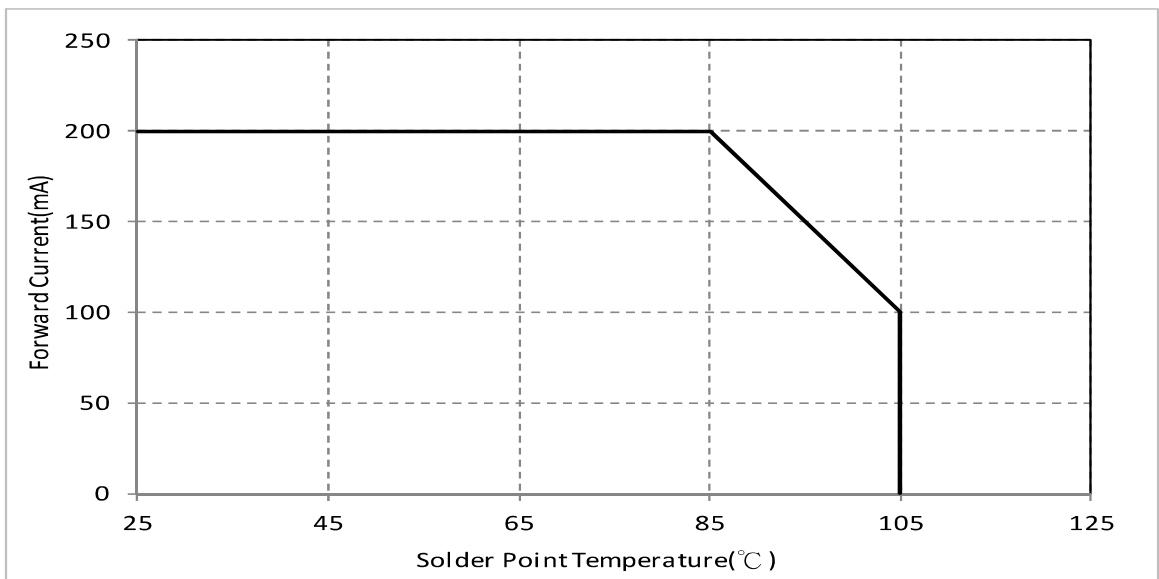

Typical Radiation Pattern


Figure 8: Typical Spatial Radiation Pattern at 65mA, $T_{sp} = 25^{\circ}\text{C}$

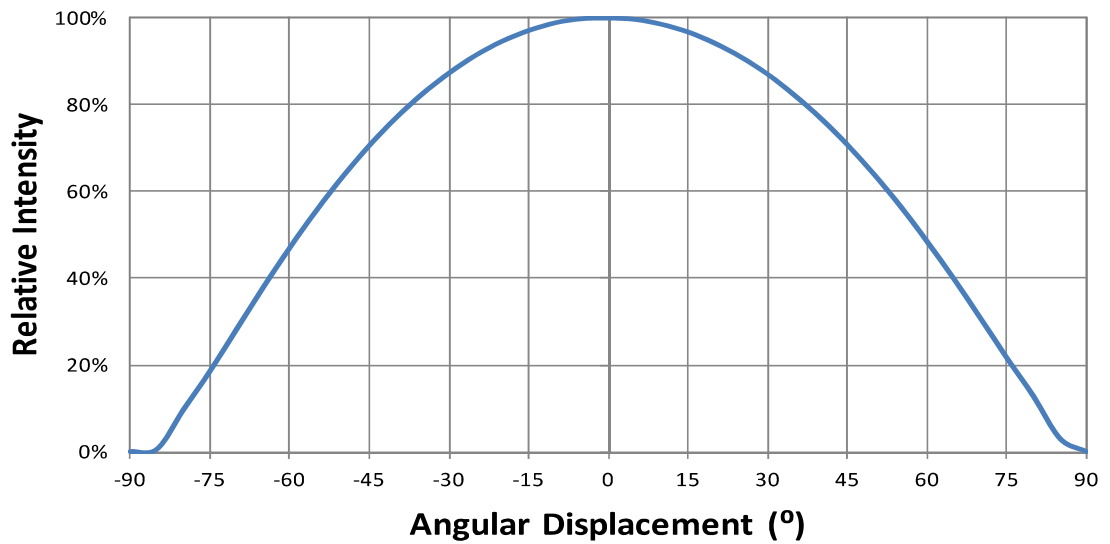

Notes for Figure 8:


1. Typical viewing angle is 120° .
2. The viewing angle is defined as the off axis angle from the centerline where luminous intensity (Iv) is $\frac{1}{2}$ of the peak value.

Figure 9: Typical Polar Radiation Pattern at 65mA, $T_{sp} = 25^{\circ}\text{C}$

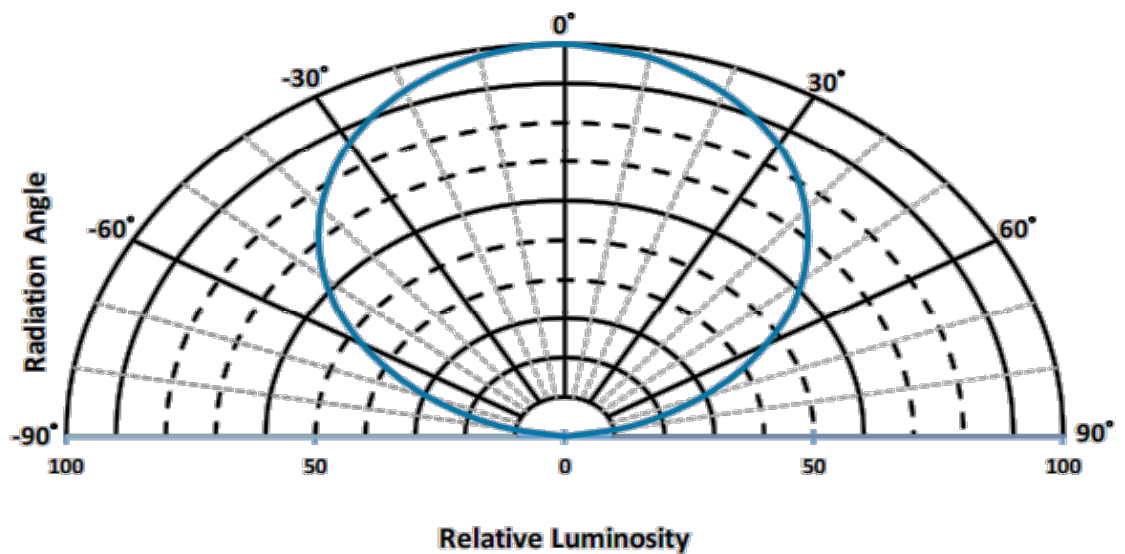

Typical Color Spectrum

Figure 10: Typical Color Spectrum

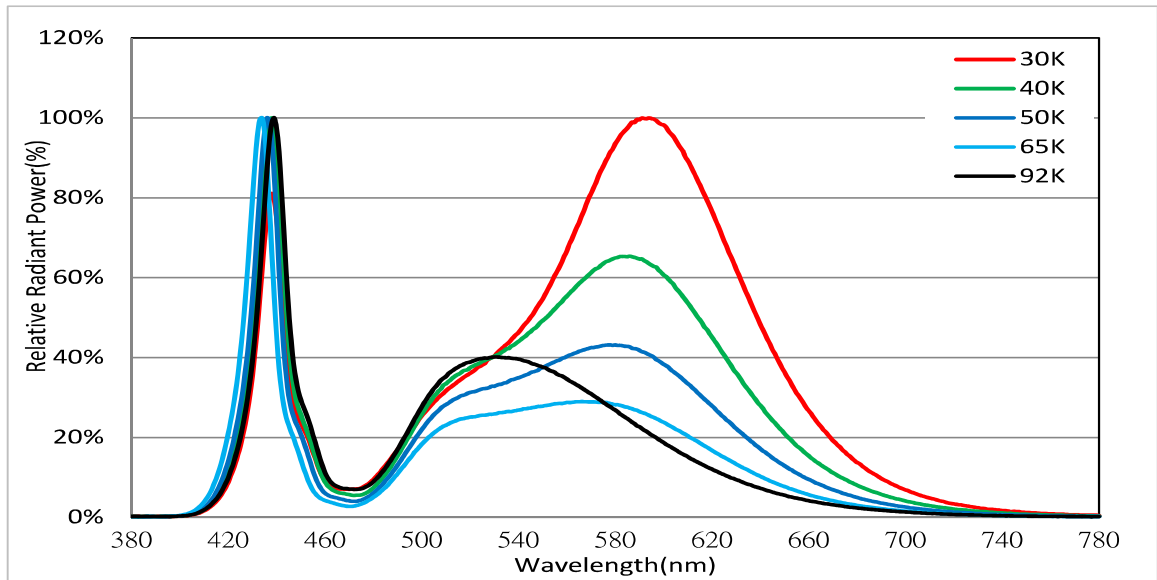


Notes for Figure 10:


1. Color spectra measured at nominal current for $T_{sp} = 25^{\circ}\text{C}$
2. Color spectra shown for 3000K/4000K/5000K/6500K/9200K products.

Mechanical Dimensions


Figure 11: Drawing for SMD 3030

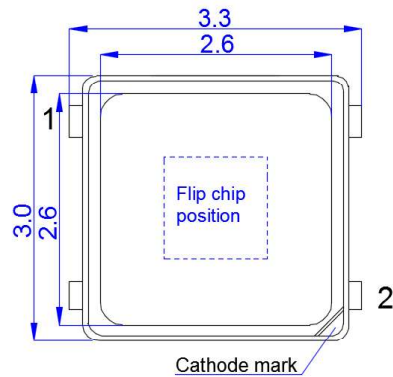


Top View

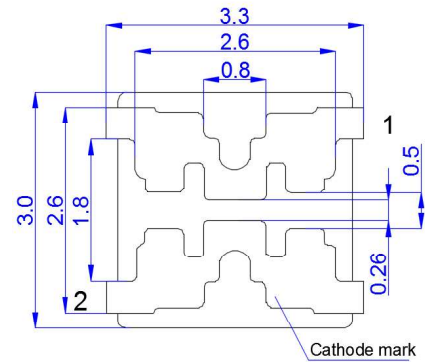

Bottom View

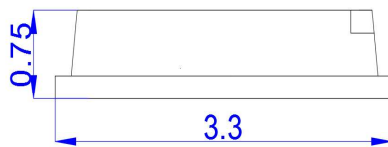

Side View




Circuit Diagram

Notes for Figure 11:

1. Drawings are not to scale.
2. Drawing dimensions are in millimeters.
3. Unless otherwise specified, tolerances are $\pm 0.10\text{mm}$.

Recommended PCB Soldering Pad Pattern

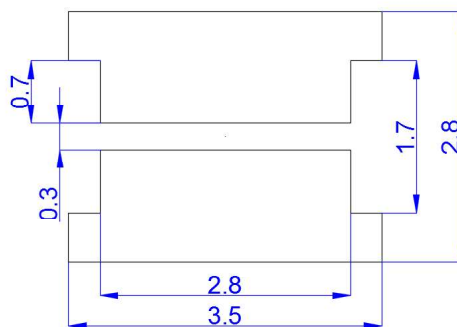

Reliability

Table 10: Reliability Test Items and Conditions

No.	Items	Reference Standard	Test Conditions	Drive Current	Test Duration	Units Failed/Tested
1	Moisture/Reflow Sensitivity	J-STD-020E	$T_{\text{reflow}} = 260^{\circ}\text{C}$, 10sec. Precondition: 60°C , 60%RH, 168hr	-	3 reflows	0/20
2	Low Temperature Storage	JESD22-A119	$T_{\text{a}} = -40^{\circ}\text{C}$	-	1000 hours	0/20
3	High Temperature Storage	JESD22-A103D	$T_{\text{a}} = 105^{\circ}\text{C}$	-	1000 hours	0/20
4	Low Temperature Operating Life	JESD22-A108D	$T_{\text{a}} = -40^{\circ}\text{C}$	65mA	1000 hours	0/20
5	Temperature Humidity Operating Life	JESD22-A101C	$T_{\text{sp}} = 85^{\circ}\text{C}$, RH=85%	65mA	1000 hours	0/20
6	High Temperature Operating Life	JESD22-A108D	$T_{\text{sp}} = 85^{\circ}\text{C}$	200mA	1000 hours	0/20
7	Power switching	IEC62717:2014	$T_{\text{sp}} = 85^{\circ}\text{C}$ 30 sec on, 30 sec off	200mA	30000 cycles	0/20
8	Thermal Shock	JESD22-A106B	$T_{\text{a}} = -40^{\circ}\text{C} \sim 105^{\circ}\text{C}$; Dwell: 15min; Transfer: 10sec	-	200 cycles	0/20
9	Temperature Cycle	JESD22-A104E	$T_{\text{a}} = -40^{\circ}\text{C} \sim 100^{\circ}\text{C}$; Dwell at extreme temperature: 15min; Ramp rate < $105^{\circ}\text{C}/\text{min}$	-	200 cycles	0/20
10	Electrostatic Discharge	JS-001-2012	HBM, 8KV, 15k Ω , 100pF, Alternately positive or negative	-	-	0/20

Passing Criteria


Item	Symbol	Test Condition	Passing Criteria
Forward Voltage	Vf	65mA	$\Delta V_f < 10\%$
Luminous Flux	Fv	65mA	$\Delta F_v < 30\%$
Chromaticity Coordinates	(x, y)	65mA	$\Delta u'v' < 0.007$

Notes for Table 10:

- Measurements are performed after allowing the LEDs to return to room temperature
- T_{reflow} : reflow soldering temperature; T_{a} : ambient temperature

Reflow Characteristics


Figure 12 : Reflow Profile

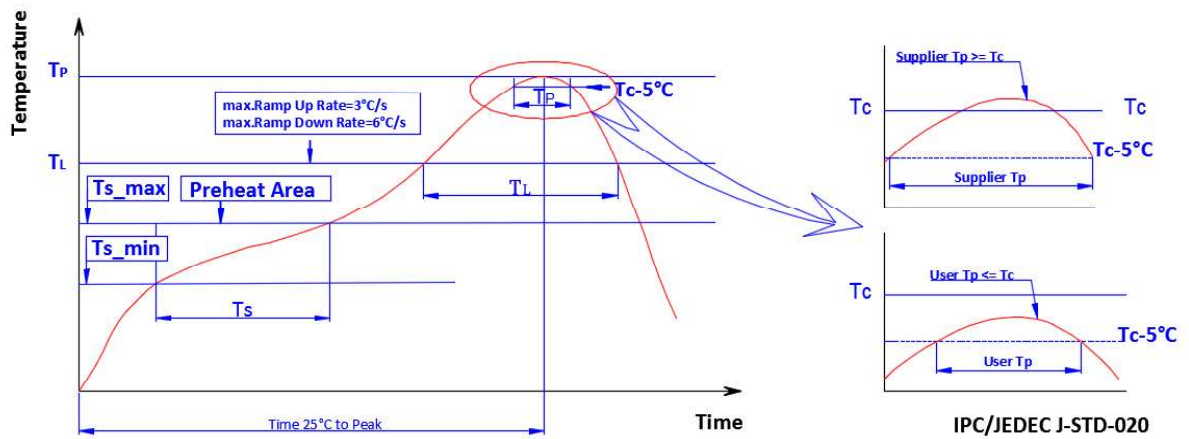

Profile Feature	Lead - Assembly
Temperature Min. (T_{s_min})	160°C
Temperature Max. (T_{s_max})	205°C
Time (ts) from T_{s_min} to T_{s_max}	60-150 seconds
Ramp-Up Rate (TL to T_p)	3 °C/second
Liquidus Temperature (TL)	220 °C
Time (TL) Maintained Above TL	60-150 seconds
Peak Temp(T_p)	260 °C max.
Time (T_p) Within 5 °C of the Specified Classification Temperature (T_c)	25 seconds max.
Ramp-Down Rate (T_p to TL)	5 °C/second max.
Time 25 °C to Peak Temperature	10 minutes max.

Packaging


Figure 13: Emitter Reel Drawings

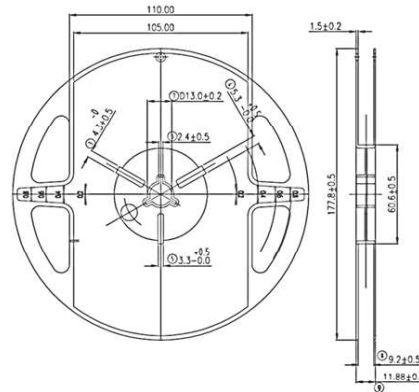

Note for Figure 12:

1. Drawings are not to scale. Drawing dimensions are in millimeters.

Figure 14: Emitter Tape Drawings

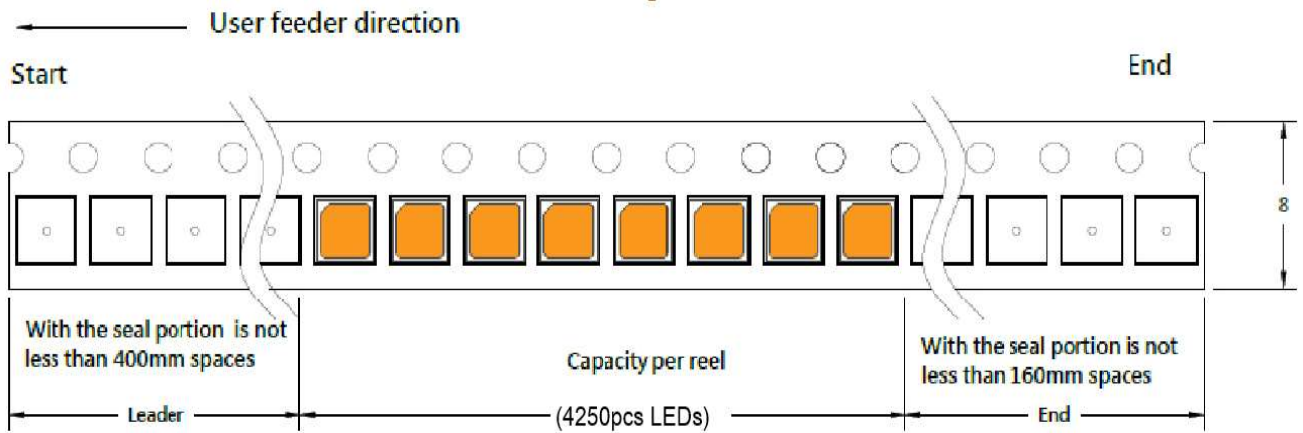


Note for Figure 14:

1. Drawings are not to scale. Drawing dimensions are in millimeters.

Packaging

Figure 15: Emitter Reel Packaging Drawings

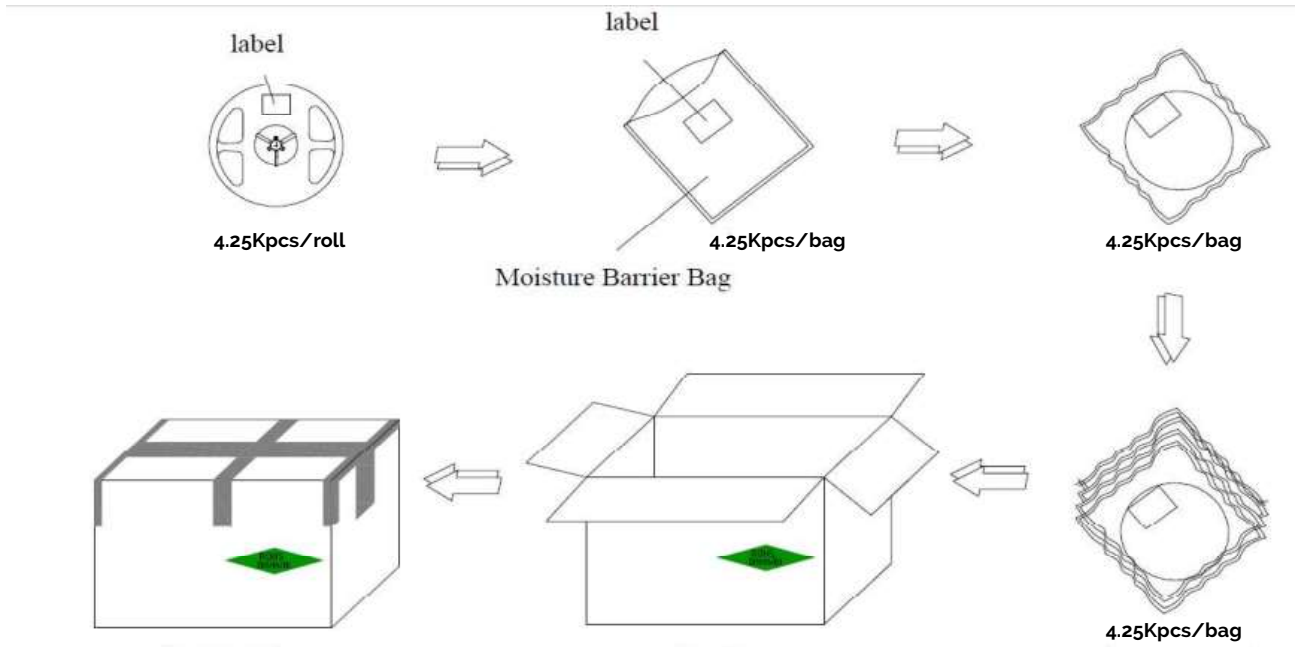

Packing Categories	Packing List	LED Q'ty
Small cardboard Box	6 bags	25,5Kpcs
Medium cardboard Box	5 small boxes	127,5Kpcs
Large cardboard Box	10 small boxes	255Kpcs

Note for Figure 15:
1. Drawings are not to scale.

Design Resources

Please contact your Bridgelux sales representative for assistance.

Precautions

CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the LED emitter. Please consult Bridgelux Application Note AN51 for additional information.

CAUTION: EYE SAFETY

Eye safety classification for the use of Bridgelux SMD LED emitter is in accordance with IEC specification EN62471: Photobiological Safety of Lamps and Lamp Systems. SMD LED emitters are classified as Risk Group 1 when operated at or below the maximum drive current. Please use appropriate precautions. It is important that employees working with LEDs are trained to use them safely.

CAUTION: RISK OF BURN

Do not touch the SMD LED emitter during operation. Allow the emitter to cool for a sufficient period of time before handling. The SMD LED emitter may reach elevated temperatures such that could burn skin when touched.

CAUTION

CONTACT WITH LIGHT EMITTING SURFACE (LES)

Avoid any contact with the LES. Do not touch the LES of the emitter or apply stress to the LES (yellow phosphor resin area). Contact may cause damage to the emitter

Optics and reflectors must not be mounted in contact with the LES (yellow phosphor resin area).

Disclaimers

MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

STANDARD TEST CONDITIONS

Unless otherwise stated, LED emitter testing is performed at the nominal drive current.

About Bridgelux: Bridging Light and Life™

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

For more information about the company, please visit
bridgelux.com
twitter.com/Bridgelux
facebook.com/Bridgelux
youtube.com/user/Bridgelux
WeChat ID: BridgeluxInChina
https://www.linkedin.com/company/bridgelux-inc-_2



46410 Fremont Boulevard
Fremont, CA 94538 USA
Tel (925) 583-8400
Fax (925) 583-8401
www.bridgelux.com

© 2024 Bridgelux, Inc. All rights reserved 2023. Product specifications are subject to change without notice. Bridgelux and the Bridgelux stylized logo design are registered trademarks of Bridgelux, Inc. All other trademarks are the property of their respective owners.