



# Bridgelux® V10 BBBL F90 Array Series

Product Data Sheet DS446-2



# Introduction

V Series



The V Series™ LED Array products deliver high quality light in a compact and cost-effective solid-state lighting package. These chip on board (CoB) arrays can be efficiently driven up to two times the nominal drive current, enabling design flexibility not previously possible. These high flux density light sources are designed to support a wide range of high quality, low cost directional luminaires and replacement lamps for both interior and exterior commercial and residential applications.

The F90 V Series COB is a high efficacy product that uses narrow band red phosphor to significantly improve the spectrum efficacy. The improved spectrum efficacy results in the 90 CRI product of the F90 Series delivering better or equivalent efficacy as that of our traditional 80 CRI V Series product.

The V10 LED Array is available in a variety of electrical, CCT, and CRI combinations providing substantial design flexibility and energy efficiency advantages.

Lighting system designs incorporating these LED arrays deliver increased system level efficacy and a longer service life. Typical applications include replacement lamps and task, accent, spot, track, wide area, security, wall packs and down lights.

## Features

- Efficacy of 173 lm/W typical, 3000K 90 CRI
- Wide selection of CCT options (2700K-5000K) with minimum 90 CRI options
- Uniform high-quality illumination
- 2 and 3 SDCM binning options (2700K – 4000K)
- Forward voltage bin codes and backside marking
- Instant light with unlimited dimming
- 5-Year warranty

## Benefits

- Enables high efficiency lighting systems and lower operating costs
- Supports the trend toward luminaire miniaturization and delivers enhanced optical control
- Design flexibility for a broad range of lighting applications
- Clean white light without pixelation
- Uniform consistent white light
- Design flexibility for multi-source applications
- Easy to use with daylight and motion sensors to increase energy savings
- Design with confidence




# Contents

Product Feature Map	2
Product Nomenclature	2
Product Selection Guide	3
European Product Registry for Energy Labeling	5
Performance at Commonly Used Drive Currents	6
Electrical Characteristics	8
Eye Safety	9
Absolute Maximum Ratings	10
Performance Curves	11
Typical Radiation Pattern	13
Typical Color Spectrum	14
Mechanical Dimensions	15
Color Binning Information	16
Packaging and Labeling	17
Design Resources	19
Precautions	19
Disclaimers	19
About Bridgelux	20

# Product Feature Map


Bridgelux arrays are fully engineered devices that provide consistent thermal and optical performance on an engineered mechanical platform. The V Series arrays are the most compact chip-on-board devices across all of

Bridgelux's LED Array products. The arrays incorporate several features to simplify design integration and assembly. Please visit [www.bridgelux.com](http://www.bridgelux.com) for more information on the V Series family of products.

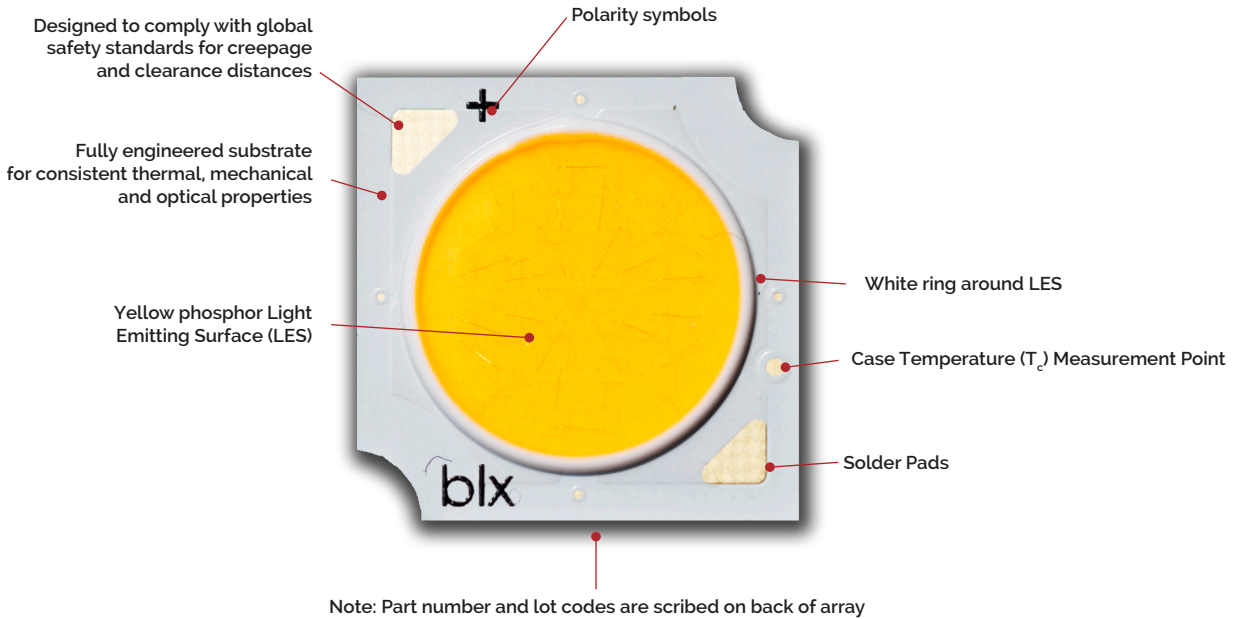

## Product Nomenclature

The part number designation for Bridgelux V Series LED arrays is explained as follows:

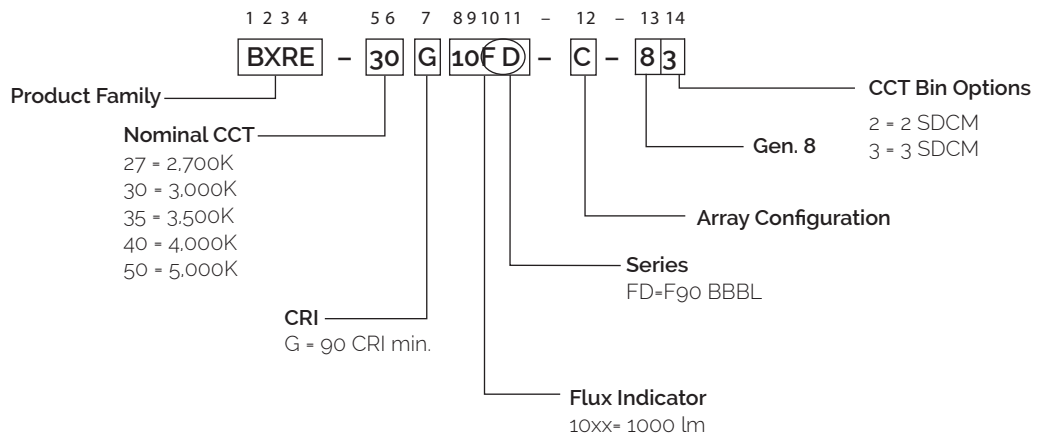

# Product Selection Guide

The following product configurations are available:

**Table 1:** Selection Guide, Pulsed Measurement Data ( $T_j = T_c = 25^\circ\text{C}$ )

Part Number	Nominal CCT <sup>1</sup> (K)	CRI <sup>2</sup>	Nominal Drive Current <sup>3</sup> (mA)	Typical Pulsed Flux <sup>4,5,6</sup> $T_c = 25^\circ\text{C}$ (lm)	Minimum Pulsed Flux <sup>6,7</sup> $T_c = 25^\circ\text{C}$ (lm)	Typical $V_f$ (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRE-27G10FD-A-8x	2700	90	300	1753	1578	34.5	10.3	169
BXRE-27G10FD-B-8x	2700	90	200	1158	1042	34.1	6.8	170
BXRE-27G10FD-C-8x	2700	90	300	1599	1439	31.6	9.5	169
BXRE-30G10FD-A-8x	3000	90	300	1789	1610	34.5	10.3	173
BXRE-30G10FD-B-8x	3000	90	200	1182	1063	34.1	6.8	173
BXRE-30G10FD-C-8x	3000	90	300	1631	1468	31.6	9.5	172
BXRE-35G10FD-A-8x	3500	90	300	1779	1601	34.5	10.3	172
BXRE-35G10FD-B-8x	3500	90	200	1181	1063	34.1	6.8	173
BXRE-35G10FD-C-8x	3500	90	300	1631	1468	31.6	9.5	172
BXRE-40G10FD-A-8x	4000	90	300	1796	1617	34.5	10.3	174
BXRE-40G10FD-B-8x	4000	90	200	1193	1074	34.1	6.8	175
BXRE-40G10FD-C-8x	4000	90	300	1647	1482	31.6	9.5	174

Notes for Table 1:

- Nominal CCT as defined by ANSI C78.377-2011.
- CRI values are minimums and tested at  $T_j = T_c = 25^\circ\text{C}$ . Minimum R<sub>g</sub> value for 90 CRI products is 50. Bridgelux maintains a  $\pm 3$  tolerance on CRI and R<sub>g</sub> values.
- Drive current is referred to as nominal drive current.
- Products tested under pulsed condition (10ms pulse width) at nominal test current where  $T_j$  (junction temperature) =  $T_c$  (case temperature) =  $25^\circ\text{C}$ .
- Typical performance values are provided as a reference only and are not a guarantee of performance.
- Bridgelux maintains a  $\pm 7\%$  tolerance on flux measurements.
- Minimum flux values at the nominal test current are guaranteed by 100% test.

# Product Selection Guide

**Table 2:** Selection Guide, Stabilized DC Performance ( $T_c = 65^\circ\text{C}$ )<sup>4,5</sup>

Part Number	Nominal CCT <sup>1</sup> (K)	CRI <sup>2</sup>	Nominal Drive Current <sup>3</sup> (mA)	Typical DC Flux <sup>4,5</sup> $T_c = 65^\circ\text{C}$ (lm)	Minimum DC Flux <sup>6</sup> $T_c = 65^\circ\text{C}$ (lm)	Typical $V_f$ (V)	Typical Power (W)	Typical Efficacy (lm/W)
BXRE-27G10FD-A-8x	2700	90	300	1639	1475	34.0	10.2	161
BXRE-27G10FD-B-8x	2700	90	200	1083	974	33.7	6.7	161
BXRE-27G10FD-C-8x	2700	90	300	1495	1345	31.2	9.4	160
BXRE-30G10FD-A-8x	3000	90	300	1672	1505	34.0	10.2	164
BXRE-30G10FD-B-8x	3000	90	200	1105	994	33.7	6.7	164
BXRE-30G10FD-C-8x	3000	90	300	1525	1373	31.2	9.4	163
BXRE-35G10FD-A-8x	3500	90	300	1663	1497	34.0	10.2	163
BXRE-35G10FD-B-8x	3500	90	200	1104	994	33.7	6.7	164
BXRE-35G10FD-C-8x	3500	90	300	1525	1372	31.2	9.4	163
BXRE-40G10FD-A-8x	4000	90	300	1680	1512	34.0	10.2	165
BXRE-40G10FD-B-8x	4000	90	200	1115	1004	33.7	6.7	165
BXRE-40G10FD-C-8x	4000	90	300	1540	1386	31.2	9.4	165

Notes for Table 2:

- Nominal CCT as defined by ANSI C78.377-2011.
- CRI values are minimums and tested at  $T_j = T_c = 65^\circ\text{C}$ . Minimum R<sub>g</sub> value for 90 CRI products is 50.
- Drive current is referred to as nominal drive current.
- Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.
- Typical performance is estimated based on operation under DC (direct current) with LED array mounted onto a heat sink with thermal interface material and the case temperature maintained at  $65^\circ\text{C}$ . Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.
- Minimum flux values at elevated temperatures are provided for reference only and are not guaranteed by 100% production testing. Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.


# European Product Registry for Energy Labeling

The European Product Registry for Energy Labeling (EPREL) is defined in the EU Regulation 2017/1369 to provide important energy efficiency information to consumers. Together with Energy Labeling Regulation ELR (EU) 2019/2015 which was amended by regulation (EU) 2021/340 for energy labelling of light sources, manufacturers are required to declare an energy class based on key technical specifications from each of their product and register it in an open data base managed by EPREL. It is now a legal requirement for a vendor of light sources to upload information about their products into the EPREL database before placing these products on the market in the EU.

Table 3 below provides a list of part numbers that are in compliance with ELR and are currently listed in the EPREL database.

At Bridgelux, we are fully committed to supplying products that are compliant with pertinent laws, rules, and obligation imposed by relevant government bodies including the European Energy Labeling regulation. Customers can use these products with full confidence for any projects that fall under the ELR.

**Table 3:** Part numbers registered in European Product Registry for Energy Labeling

PART NUMBER <sup>1</sup>	CCT (K)	CRI	Current <sup>2</sup> (mA)	Vf (V)	Useful flux <sup>3</sup> ( $\Phi_{use}$ ) at 85C (lm)	Power (W)	Efficacy (lm/W)	Energy efficiency class <sup>4</sup> 	Registration No	URL to Product Information Sheet in EPREL Database
BXRE-27G10FD-A-8x	2700	90	720	38.0	3403	27	124	E	1425055	<a href="https://eprelec.europa.eu/qr/1425055">https://eprelec.europa.eu/qr/1425055</a>
BXRE-27G10FD-B-8x	2700	90	540	38.0	2520	21	123	E	1425056	<a href="https://eprelec.europa.eu/qr/1425056">https://eprelec.europa.eu/qr/1425056</a>
BXRE-27G10FD-C-8x	2700	90	720	34.8	3120	25	124	E	1425057	<a href="https://eprelec.europa.eu/qr/1425057">https://eprelec.europa.eu/qr/1425057</a>
BXRE-30G10FD-A-8x	3000	90	720	38.0	3473	27	127	E	1425086	<a href="https://eprelec.europa.eu/qr/1425086">https://eprelec.europa.eu/qr/1425086</a>
BXRE-30G10FD-B-8x	3000	90	540	38.0	2571	21	125	E	1425087	<a href="https://eprelec.europa.eu/qr/1425087">https://eprelec.europa.eu/qr/1425087</a>
BXRE-30G10FD-C-8x	3000	90	720	34.8	3183	25	127	E	1425088	<a href="https://eprelec.europa.eu/qr/1425088">https://eprelec.europa.eu/qr/1425088</a>
BXRE-35G10FD-A-8x	3500	90	720	38.0	3507	27	128	E	1425116	<a href="https://eprelec.europa.eu/qr/1425116">https://eprelec.europa.eu/qr/1425116</a>
BXRE-35G10FD-B-8x	3500	90	540	38.0	2597	21	127	E	1425117	<a href="https://eprelec.europa.eu/qr/1425117">https://eprelec.europa.eu/qr/1425117</a>
BXRE-35G10FD-C-8x	3500	90	720	34.8	3215	25	128	E	1425118	<a href="https://eprelec.europa.eu/qr/1425118">https://eprelec.europa.eu/qr/1425118</a>
BXRE-40G10FD-A-8x	4000	90	720	38.0	3542	27	129	E	1425147	<a href="https://eprelec.europa.eu/qr/1425147">https://eprelec.europa.eu/qr/1425147</a>
BXRE-40G10FD-B-8x	4000	90	540	38.0	2623	21	128	E	1425148	<a href="https://eprelec.europa.eu/qr/1425148">https://eprelec.europa.eu/qr/1425148</a>
BXRE-40G10FD-C-8x	4000	90	720	34.8	3247	25	129	E	1425149	<a href="https://eprelec.europa.eu/qr/1425149">https://eprelec.europa.eu/qr/1425149</a>

Notes for Table 3:

1. All device listed here must be disposed as e-waste upon its end of life according to local country guideline in each country.
2. For information on performance values at alternative drive conditions, please refer to the Product Selection Guide, Absolute Maximum Rating Table and Performance Curves in this data sheet.
3. For a definition of useful luminous flux ( $\Phi_{use}$ ), please see the ELR regulations at <https://tinyurl.com/4b6zvt4m>.
4. EPREL requires an arrow symbol containing the letter of the energy efficiency class to be displayed, on technical promotional material. Refer to this energy efficiency class column for specific energy efficiency class on each part number.

# Performance at Commonly Used Drive Currents

V Series LED arrays are tested to the specifications shown using the nominal drive currents in Table 1. V Series LED Arrays may also be driven at other drive currents dependent on specific application design requirements. The performance at any drive current can be derived from the current vs. voltage characteristics shown in Figures 1, 2 & 3 and the flux vs. current characteristics shown in Figures 4, 5 & 6. The performance at commonly used drive currents is summarized in Table 4.

**Table 4:** Product Performance at Commonly Used Drive Currents

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical V <sub>f</sub> T <sub>c</sub> = 25°C (V)	Typical Power T <sub>c</sub> = 25°C (W)	Typical Flux <sup>2</sup> T <sub>c</sub> = 25°C (lm)	Typical DC Flux <sup>3</sup> T <sub>c</sub> = 65°C (lm)	Typical Efficacy T <sub>c</sub> = 25°C (lm/W)
BXRE-27G10FD-A-8x	90	150	33.1	5.0	898	852	181
		225	33.8	7.6	1334	1253	175
		<b>300</b>	<b>34.5</b>	<b>10.3</b>	<b>1753</b>	<b>1639</b>	<b>169</b>
		360	35.0	12.6	2092	1928	166
		600	36.9	22.1	3355	3034	152
		720	37.7	27.2	3947	3507	145
BXRE-27G10FD-B-8x	90	100	32.9	3.3	589	561	179
		150	33.6	5.0	877	827	174
		<b>200</b>	<b>34.1</b>	<b>6.8</b>	<b>1158</b>	<b>1083</b>	<b>170</b>
		270	34.9	9.4	1542	1425	163
		400	36.3	14.5	2222	2014	153
		540	37.7	20.3	2908	2591	143
BXRE-27G10FD-C-8x	90	150	30.4	4.6	816	777	179
		225	31.0	7.0	1212	1143	174
		<b>300</b>	<b>31.6</b>	<b>9.5</b>	<b>1599</b>	<b>1495</b>	<b>169</b>
		360	32.1	11.5	1901	1758	165
		600	33.8	20.3	3049	2767	150
		720	34.6	24.9	3586	3199	144
BXRE-30G10FD-A-8x	90	150	33.1	5.0	916	869	184
		225	33.8	7.6	1361	1279	179
		<b>300</b>	<b>34.5</b>	<b>10.3</b>	<b>1789</b>	<b>1672</b>	<b>173</b>
		360	35.0	12.6	2135	1967	169
		600	36.9	22.1	3424	3096	155
		720	37.7	27.2	4027	3579	148
BXRE-30G10FD-B-8x	90	100	32.9	3.3	601	572	183
		150	33.6	5.0	895	844	178
		<b>200</b>	<b>34.1</b>	<b>6.8</b>	<b>1182</b>	<b>1105</b>	<b>173</b>
		270	34.9	9.4	1573	1454	167
		400	36.3	14.5	2267	2055	156
		540	37.7	20.3	2968	2644	146
BXRE-30G10FD-C-8x	90	150	30.4	4.6	833	793	183
		225	31.0	7.0	1224	1166	176
		<b>300</b>	<b>31.6</b>	<b>9.5</b>	<b>1614</b>	<b>1525</b>	<b>170</b>
		360	32.1	11.5	1920	1794	166
		600	33.8	20.3	3079	2823	152
		720	34.6	24.9	3622	3264	145

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.



# Performance at Commonly Used Drive Currents

**Table 4:** Product Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical V <sub>f</sub> T <sub>c</sub> = 25°C (V)	Typical Power T <sub>c</sub> = 25°C (W)	Typical Flux <sup>2</sup> T <sub>c</sub> = 25°C (lm)	Typical DC Flux <sup>3</sup> T <sub>c</sub> = 65°C (lm)	Typical Efficacy T <sub>c</sub> = 25°C (lm/W)
BXRE-35G10FD-A-8x	90	150	33.1	5.0	911	864	183
		225	33.8	7.6	1354	1272	178
		<b>300</b>	<b>34.5</b>	<b>10.3</b>	<b>1779</b>	<b>1663</b>	<b>172</b>
		360	35.0	12.6	2123	1956	169
		600	36.9	22.1	3405	3079	154
		720	37.7	27.2	4005	3560	147
BXRE-35G10FD-B-8x	90	100	32.9	3.3	601	572	182
		150	33.6	5.0	894	844	178
		<b>200</b>	<b>34.1</b>	<b>6.8</b>	<b>1181</b>	<b>1104</b>	<b>173</b>
		270	34.9	9.4	1572	1453	167
		400	36.3	14.5	2266	2054	156
		540	37.7	20.3	2967	2643	146
BXRE-35G10FD-C-8x	90	150	30.4	4.6	832	792	183
		225	31.0	7.0	1236	1166	177
		<b>300</b>	<b>31.6</b>	<b>9.5</b>	<b>1631</b>	<b>1525</b>	<b>172</b>
		360	32.1	11.5	1939	1793	168
		600	33.8	20.3	3110	2822	153
		720	34.6	24.9	3658	3263	147
BXRE-40G10FD-A-8x	90	150	33.1	5.0	920	873	185
		225	33.8	7.6	1367	1284	180
		<b>300</b>	<b>34.5</b>	<b>10.3</b>	<b>1796</b>	<b>1680</b>	<b>174</b>
		360	35.0	12.6	2144	1975	170
		600	36.9	22.1	3439	3109	155
		720	37.7	27.2	4045	3595	149
BXRE-40G10FD-B-8x	90	100	32.9	3.3	607	578	184
		150	33.6	5.0	903	852	179
		<b>200</b>	<b>34.1</b>	<b>6.8</b>	<b>1193</b>	<b>1115</b>	<b>175</b>
		270	34.9	9.4	1588	1468	168
		400	36.3	14.5	2289	2075	157
		540	37.7	20.3	2996	2670	147
BXRE-40G10FD-C-8x	90	150	30.4	4.6	841	800	185
		225	31.0	7.0	1249	1177	179
		<b>300</b>	<b>31.6</b>	<b>9.5</b>	<b>1647</b>	<b>1540</b>	<b>174</b>
		360	32.1	11.5	1958	1811	170
		600	33.8	20.3	3141	2850	155
		720	34.6	24.9	3694	3295	148

Notes for Table 4:

1. Alternate drive currents in Table 4 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a ± 7% tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

# Electrical Characteristics

**Table 5:** Electrical Characteristics

Part Number	Drive Current (mA)	Forward Voltage Pulsed, $T_c = 25^\circ\text{C}$ (V) <sup>1, 2, 3, 8</sup>			Typical Coefficient of Forward Voltage <sup>4</sup> $\Delta V_f / \Delta T_c$ (mV/ $^\circ\text{C}$ )	Typical Thermal Resistance Junction to Case <sup>5,6</sup> $R_{j-c}$ ( $^\circ\text{C}/\text{W}$ )	Driver Selection Voltages <sup>7</sup> (V)	
		Minimum	Typical	Maximum			$V_f$ Min. Hot $T_c = 95^\circ\text{C}$ (V)	$V_f$ Max. Cold $T_c = -40^\circ\text{C}$ (V)
BXRE-xxx10FD-A-8x	300	32.4	34.5	36.5	-9.64	0.41	31.7	37.2
	720	35.5	37.7	40.0	-10.55	0.60	34.7	40.7
BXRE-xxx10FD-B-8x	200	32.1	34.1	36.2	-9.55	0.62	31.4	36.8
	540	35.4	37.7	39.9	-10.54	0.95	34.7	40.6
BXRE-xxx10FD-C-8x	300	29.7	31.6	33.5	-8.84	0.38	29.1	34.1
	720	32.5	34.6	36.7	-9.67	0.55	31.8	37.3

Notes for Table 5:

- Parts are tested in pulsed conditions.  $T_c = 25^\circ\text{C}$ . Pulse width is 10ms.
- Voltage minimum and maximum are provided for reference only and are not a guarantee of performance.
- Bridgelux maintains a tester tolerance of  $\pm 0.10\text{V}$  on forward voltage measurements.
- Typical coefficient of forward voltage tolerance is  $\pm 0.1\text{mV}$  for nominal current.
- Thermal resistance values are based from test data of a 3000K 90 CRI product.
- Thermal resistance value was calculated using total electrical input power; optical power was not subtracted from input power. The thermal interface material used during testing is not included in the thermal resistance value.
- $V_f$  min hot and max cold values are provided as reference only and are not guaranteed by test. These values are provided to aid in driver design and selection over the operating range of the product.
- This product has been designed and manufactured per IEC 62031:2018. This product has passed dielectric withstand voltage testing at 1140 V. The working voltage designated for the insulation is 70V d.c. The maximum allowable voltage across the array must be determined in the end product application.

# Eye Safety

**Table 6:** Eye Safety Risk Group (RG) Classifications

Part Number	Drive Current (mA)	CCT <sup>4</sup>	
		2700K/3000K	3500-5000K <sup>2,3</sup>
BXRE-xxx10Fx-A-8x	415	RG1	RG1
	720	RG1	RG2
BXRE-xxx10Fx-B-8x	405	RG1	RG1
	540	RG1	RG2
BXRE-xxx10Fx-C-8x	450	RG1	RG1
	720	RG1	RG2

Notes for Table 6:

1. Eye safety classification for the use of Bridgelux V Series LED arrays is in accordance with specification IEC/TR 62778: Application of IEC 62471 for the assessment of blue light hazard to light sources and luminaires.
2. For products classified as RG2 at 4000K, Ethr= 1980 lx.
3. For products classified as RG2 at 5000K Ethr= 1530 lx.
4. Please contact your Bridgelux sales representative for Ethr values at specific drive currents and CCTs not listed.

# Absolute Maximum Ratings

**Table 7:** Maximum Ratings


Parameter	Maximum Rating		
LED Junction Temperature (T <sub>j</sub> )	150°C		
Storage Temperature <sup>1</sup>	-40°C to +95°C		
Operating Case Temperature <sup>2</sup> (T <sub>c</sub> )	95°C		
Soldering Temperature <sup>3</sup>	300°C or lower for a maximum of 6 seconds		
	BXRE-xxG10FD-A-8x	BXRE-xxG10FD-B-8x	BXRE-xxG10FD-C-8x
Maximum Drive Current <sup>4</sup>	720 mA at ≤85°C 540 mA at 95°C	540 mA at ≤85°C 405 mA at 95°C	720 mA at ≤85°C 540 mA at 95°C
Maximum Peak Pulsed Drive Current <sup>5</sup>	1030mA	770mA	1030mA
Maximum Reverse Voltage <sup>6</sup>	-60V	-60V	-55V

Notes for Table 7:


1. The F90 product is robust enough to pass our internal humidity test but it is still more sensitive compared to regular LED array product. The product needs to be stored in a dry environment. It is not recommended to use the product in a damp environment that directly exposes it to moisture.
2. For IEC 62717 requirement, please consult your Bridgelux sales representative.
3. Refer to Bridgelux Application Note AN101: Handling and Assembly of Bridgelux V Series LED Arrays
4. Arrays may be driven at higher currents however lumen maintenance may be reduced and warranty will not apply.
5. Bridgelux recommends a maximum duty cycle of 10% and pulse width of 20 ms when operating LED Arrays at maximum peak pulsed current specified. Maximum peak pulsed currents indicate values where LED Arrays can be driven without catastrophic failures.
6. Light emitting diodes are not designed to be driven in reverse voltage and will not produce light under this condition. Maximum rating provided for reference only.

# Performance Curves


**Figure 1: V10A Drive Current vs. Voltage**

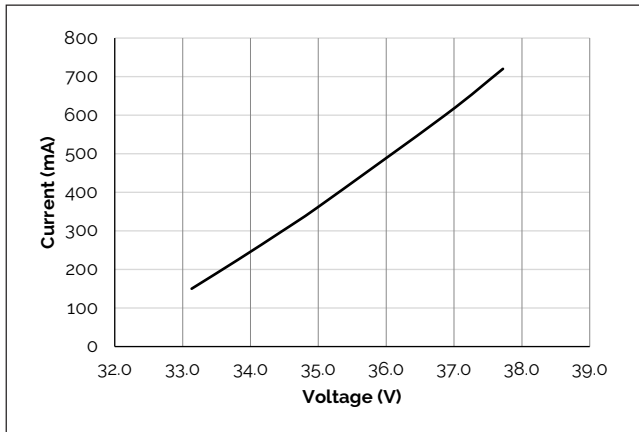


**Figure 2: V10B Drive Current vs. Voltage**

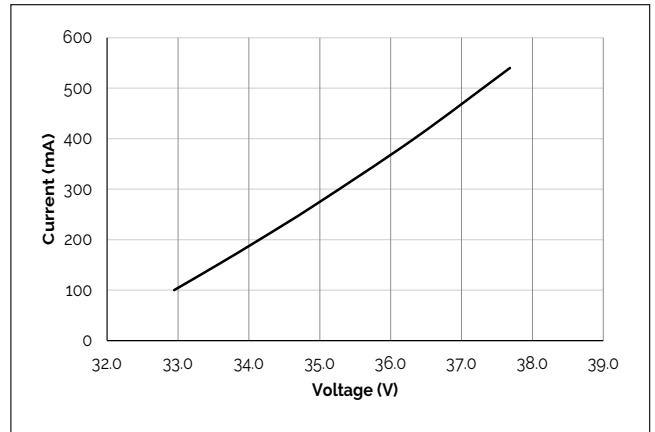


**Figure 3: V10C Drive Current vs. Voltage**

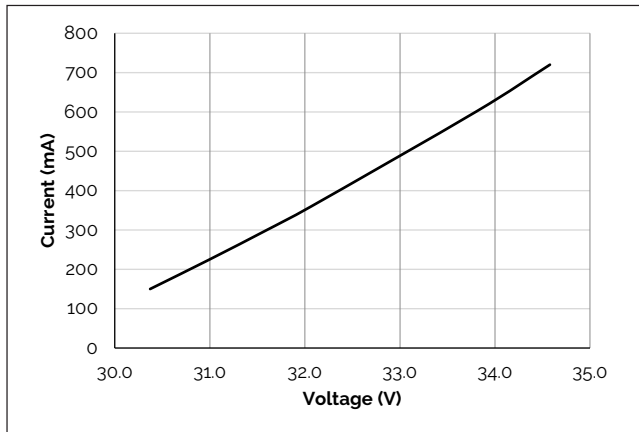


**Figure 4: V10A Typical Relative Flux vs. Current**

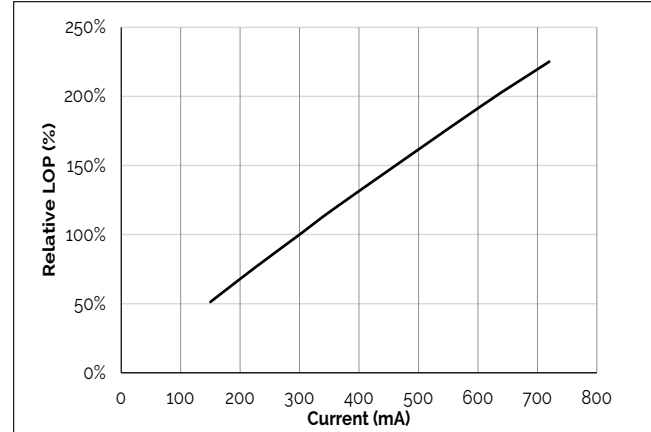

**Figure 5: V10B Typical Relative Flux vs. Current**

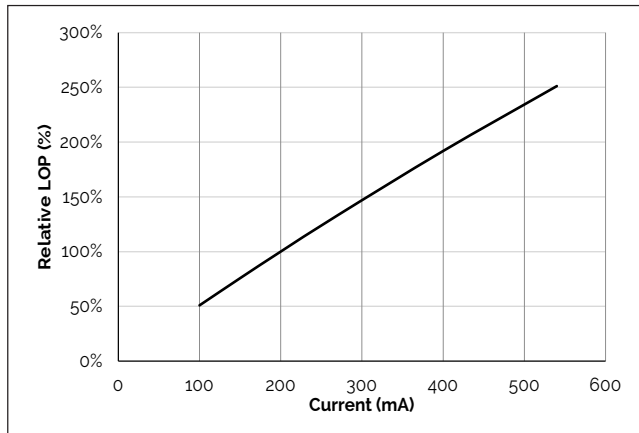

**Figure 6: V10C Typical Relative Flux vs. Current**

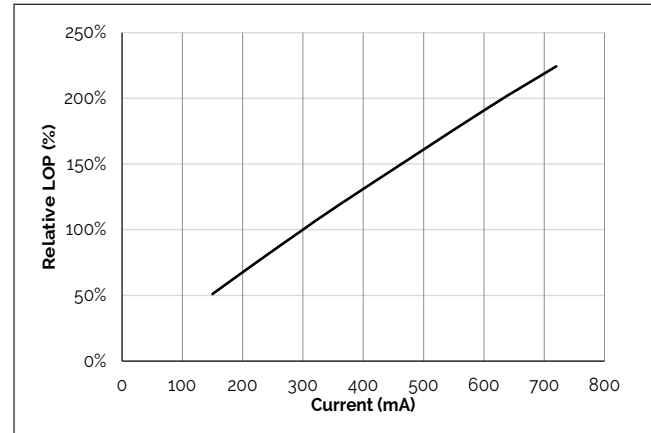


Notes for Figures 1-6:


1. Bridgelux does not recommend driving high power LEDs at low currents. Doing so may produce unpredictable results. Pulse width modulation (PWM) is recommended for dimming effects.
2. Products tested under pulsed condition (10ms pulse width) at nominal test current where  $T_j$  (junction temperature) =  $T_c$  (case temperature) = 25°C.

# Performance Curves


**Figure 7: Typical DC Flux vs. Case Temperature**

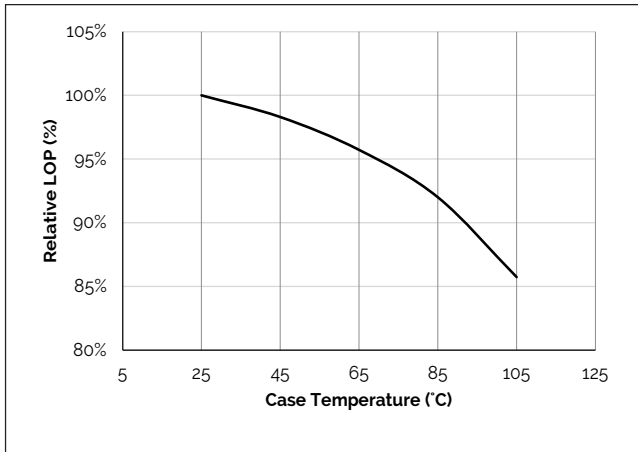


**Figure 8: Typical DC ccx Shift vs. Case Temperature**

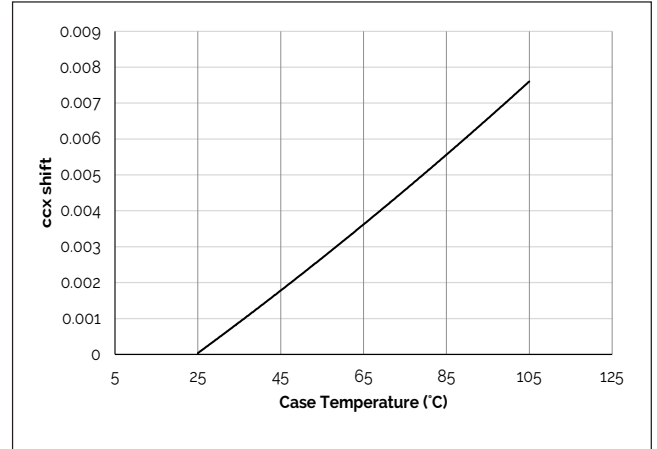

**Figure 9: Typical DC ccy Shift vs. Case Temperature**

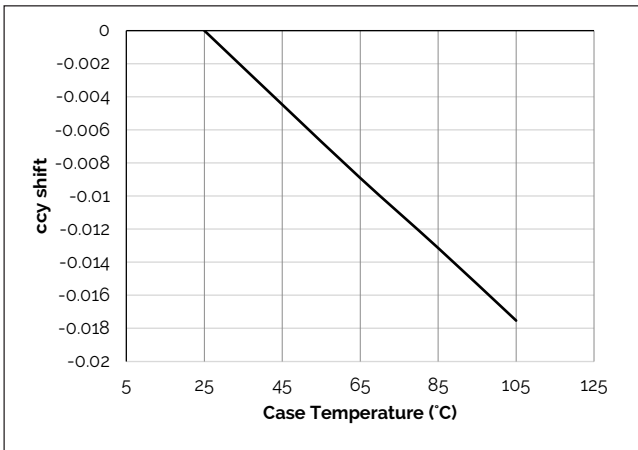

**Figure 10: Derating Curve**

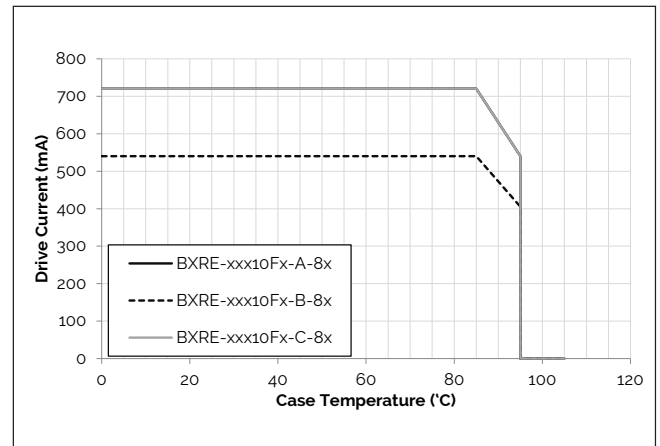


Note for Figures 7-9:

1. Characteristics shown for Warm White.

# Typical Radiation Pattern


Figure 11: Typical Spatial Radiation Pattern

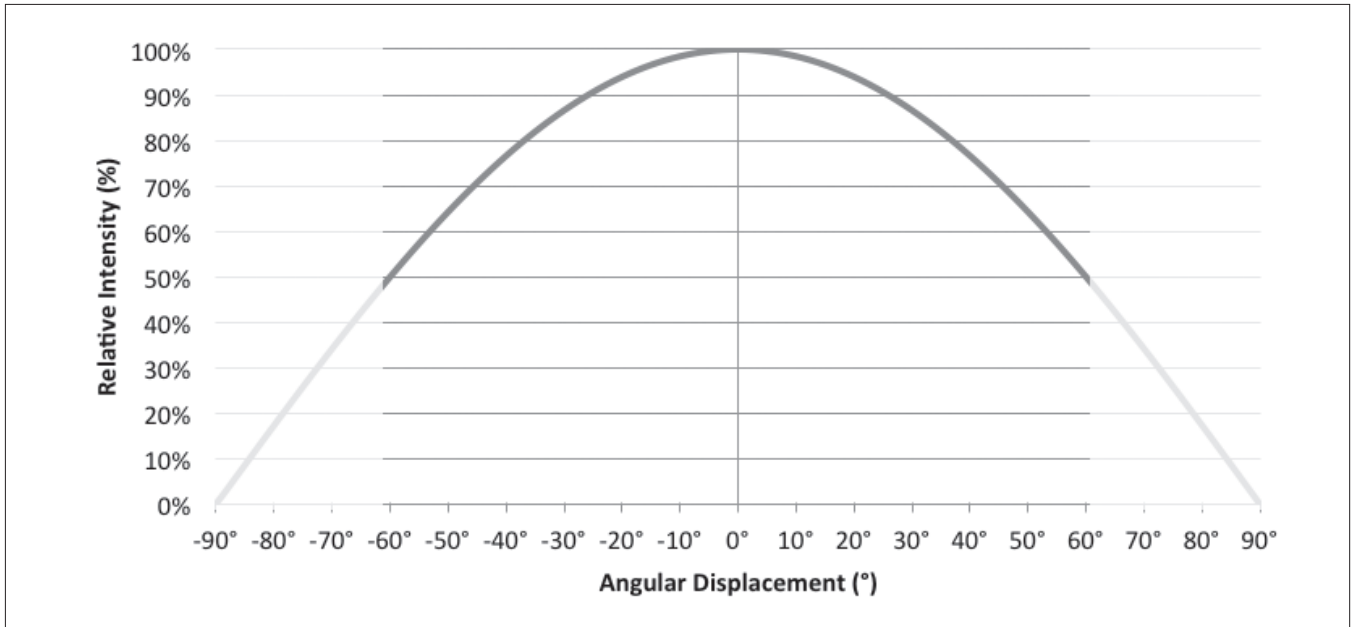

Notes for Figure 11:


1. Typical viewing angle is 120°.
2. The viewing angle is defined as the off axis angle from the centerline where intensity is ½ of the peak value.

Figure 12: Typical Polar Radiation Pattern

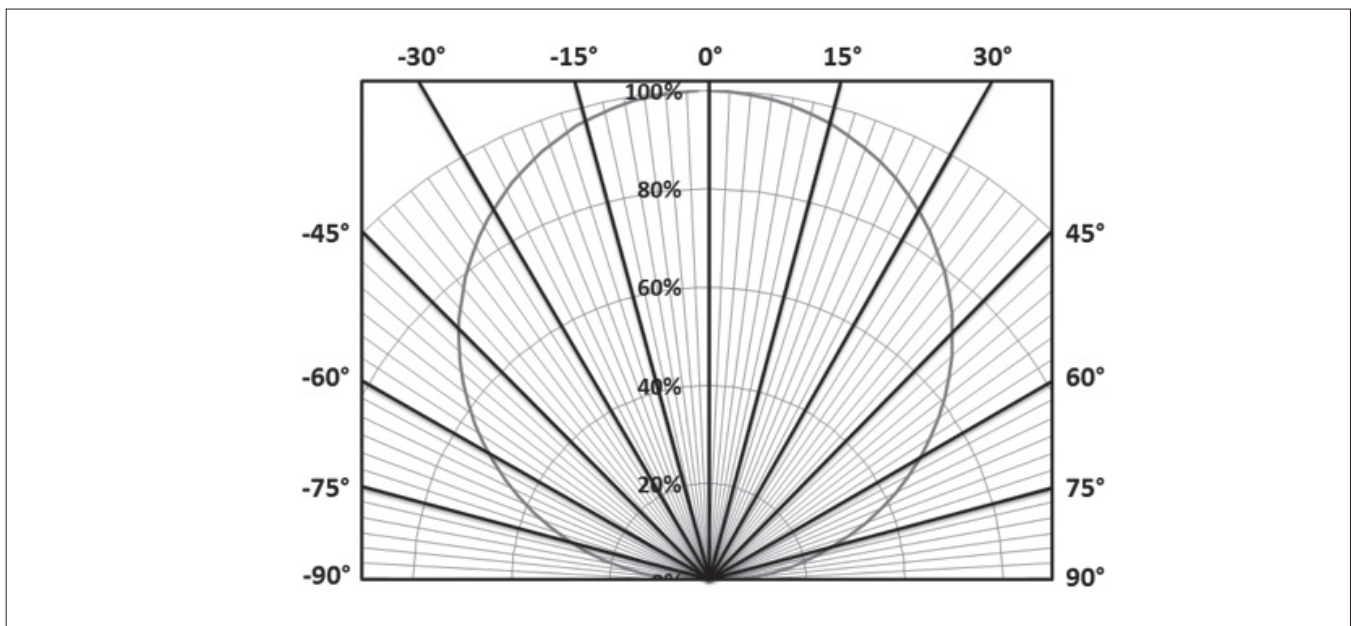

# Typical Color Spectrum

Figure 13: Typical Color Spectrum

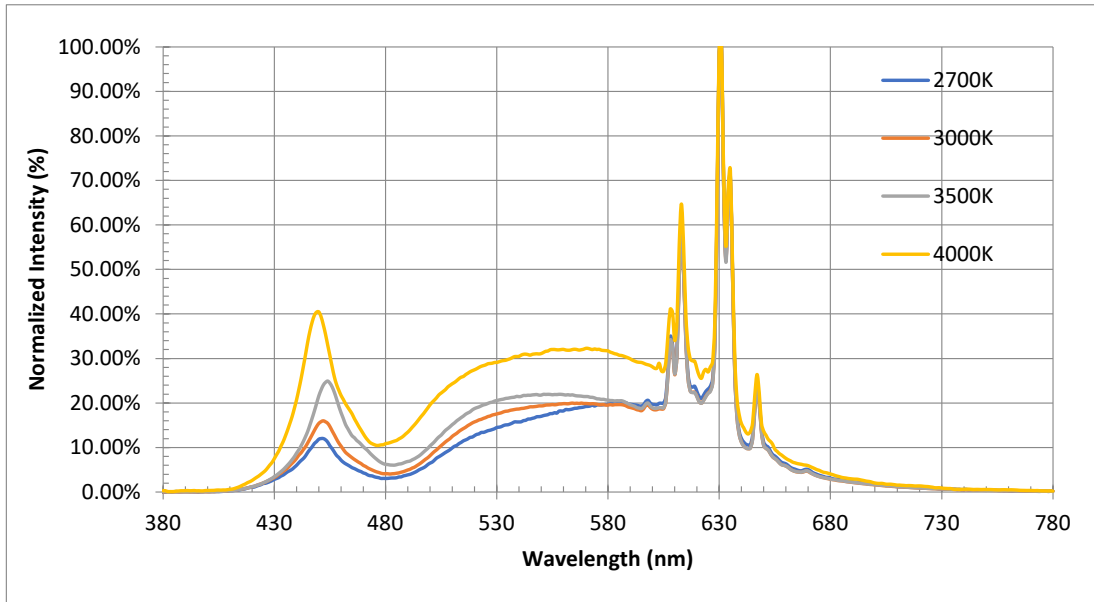


Notes for Figure 13:

1. Color spectra measured at nominal current for  $T_j = T_c = 65^\circ\text{C}$ .
2. Color spectra shown is 2700K and 90CRI.
3. Color spectra shown is 3000K and 90 CRI.
4. Color spectra shown is 3500K and 90 CRI.
5. Color spectra shown is 4000K and 90 CRI.



# Mechanical Dimensions

Figure 14 Drawing for V10 LED Array

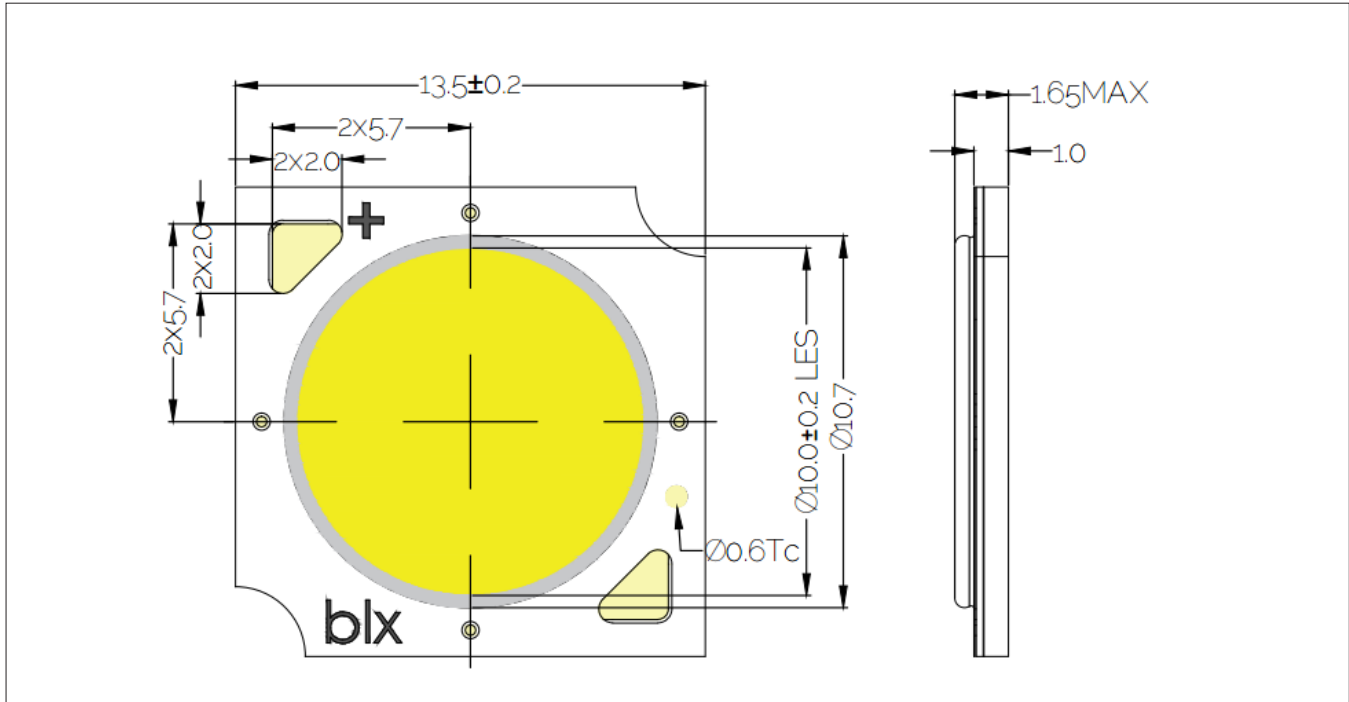


Notes for Figure 14:

1. Drawings are not to scale.
2. Drawing dimensions are in millimeters.
3. Unless otherwise specified, tolerances are  $\pm 0.1$ mm.
4. Solder pad labeled "+" denotes positive contact.
5. Refer to Application Notes AN101 for product handling, mounting and heat sink recommendations.
6. The optical center of the LED Array is nominally defined by the mechanical center of the array to a tolerance of  $\pm 0.2$ mm.
7. Bridgelux maintains a flatness of 0.10mm across the mounting surface of the array.

# Color Binning Information

**Figure 15: Warm and Neutral White Test Bins in xy Color Space**

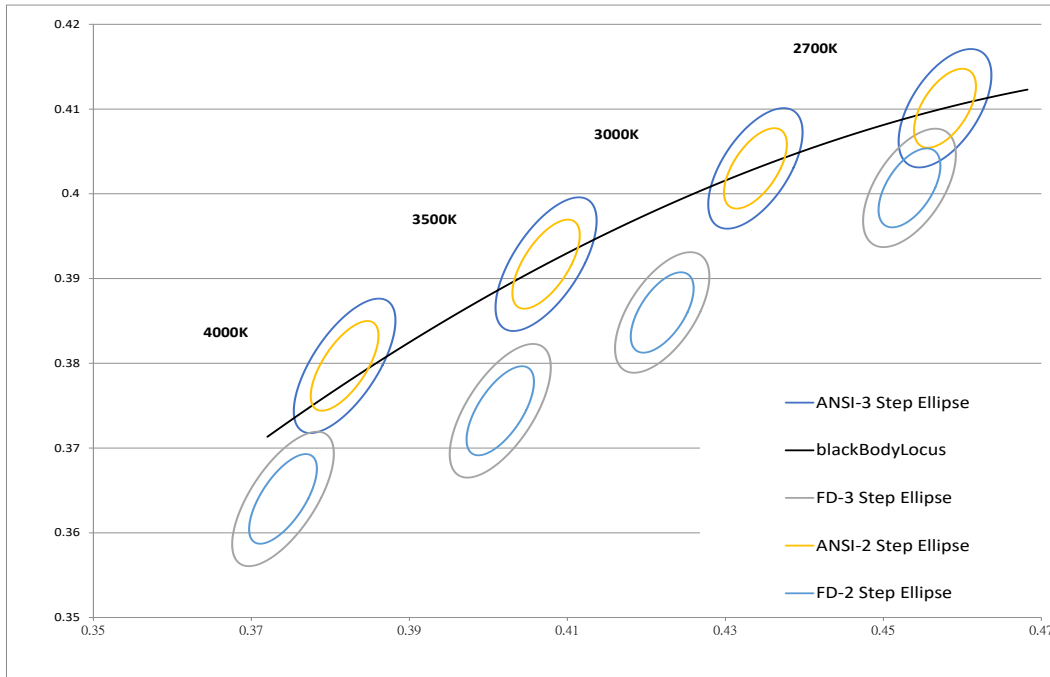

Note: Pulsed Test Conditions,  $T_c = 65^\circ\text{C}$

**Table 8: Warm and Neutral White xy Bin Coordinates and Associated Typical CCT (product is hot targeted to  $T_c = 65^\circ\text{C}$ )**


Bin Code	2700K	3000K	3500K	4000K
ANSI Bin (for reference only)	(2580K - 2870K)	(2870K - 3220K)	(3220K - 3710K)	(3710K - 4260K)
83 (3 SDCM)	(2645K - 2788K)	(3025K - 3210K)	(3333K - 3567K)	(3935K - 4254K)
82 (2 SDCM)	(2668K - 2764K)	(3055K - 3178K)	(3370K - 3526K)	(3985K - 4197K)
Center Point (x,y)	(0.4533, 0.4007)	(0.422 0.386)	(0.4015 0.3744)	(0.374, 0.364)

Note for Table 8:

1. Bridgelux maintains a tolerance of +/- 0.007 on x and y color coordinates in the CIE 1931 color Space.

# Packaging and Labeling

Figure 16: V10 Packaging Tube

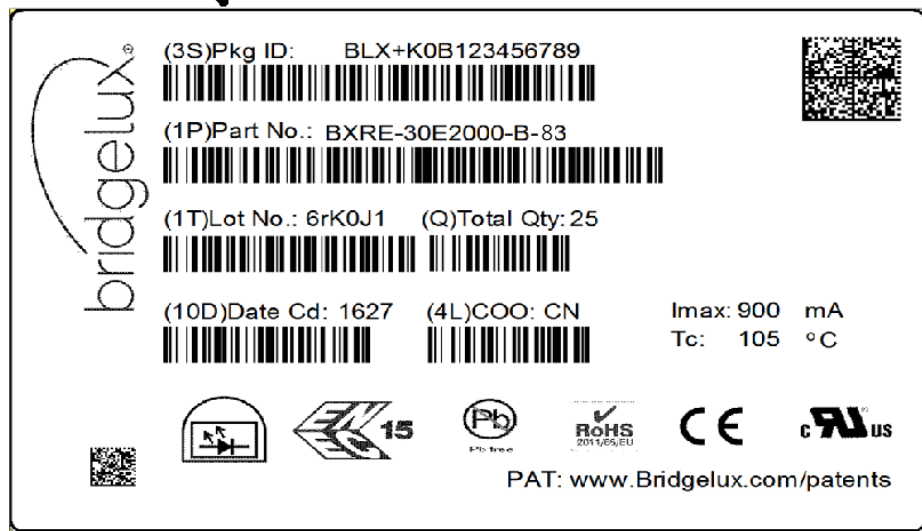

Box Label

Commercial Invoice  
and Packing list




Notes for Figure 16:

1. Each tube holds 30 V10 COB arrays.
2. One tube is sealed in an anti-static bag. Four bags are placed in a shipping box. Depending on quantities ordered, a bigger shipping box, containing four boxes may be used to ship products.
3. Each bag and box is to be labeled as shown above.
4. Dimensions for each tube are 8.3 (W) x 15.4 (H) x 430 (L). Dimensions for the anti-static bag are 75 (W) x 615 (L) x 3.1 (T) mm. Dimensions for the shipping box are 58.7 x 13.3 x 7.9 cm

# Packaging and Labeling

**Figure 17: Gen. 8 Product Labeling**

Bridgelux COB arrays have laser markings on the back side of the substrate to help with product identification. In addition to the product identification markings, Bridgelux COB arrays also contain markings for internal Bridgelux manufacturing use only. The image below shows which markings are for customer use and which ones are for Bridgelux internal use only. The Bridgelux internal manufacturing markings are subject to change without notice, however these will not impact the form, function or performance of the COB array.

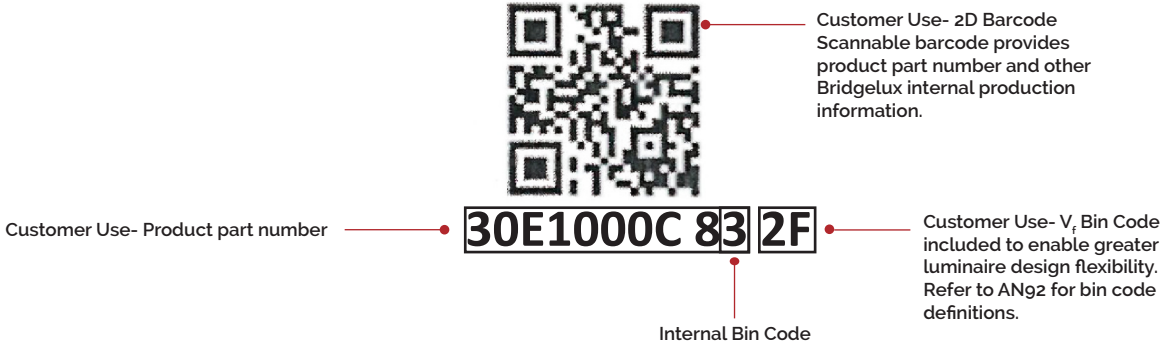

# Design Resources

## Application Notes

Bridgelux has developed a comprehensive set of application notes and design resources to assist customers in successfully designing with the V Series product family of LED array products. For all available application notes visit [www.bridgelux.com](http://www.bridgelux.com).

## Optical Source Models

Optical source models and ray set files are available for all Bridgelux products. For a list of available formats, visit [www.bridgelux.com](http://www.bridgelux.com).

## 3D CAD Models

Three dimensional CAD models depicting the product outline of all Bridgelux V Series LED arrays are available in both IGS and STEP formats. Please contact your Bridgelux sales representative for assistance.

## LM80

Please contact your Bridgelux sales representative for LM-80 report.

# Precautions

## CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the LED array. Please consult Bridgelux Application Note AN101 for additional information.

## CAUTION: RISK OF BURN

Do not touch the V Series LED array during operation. Allow the array to cool for a sufficient period of time before handling. The V Series LED array may reach elevated temperatures such that could burn skin when touched.

## CAUTION

### CONTACT WITH LIGHT EMITTING SURFACE (LES)

Avoid any contact with the LES. Do not touch the LES of the LED array or apply stress to the LES (yellow phosphor resin area). Contact may cause damage to the LED array.

Optics and reflectors must not be mounted in contact with the LES (yellow phosphor resin area).

# Disclaimers

## MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

## STANDARD TEST CONDITIONS

Unless otherwise stated, array testing is performed at the nominal drive current.

# About Bridgelux: Bridging Light and Life™

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

**For more information about the company, please visit**  
**[bridgelux.com](http://bridgelux.com)**  
**[twitter.com/Bridgelux](https://twitter.com/Bridgelux)**  
**[facebook.com/Bridgelux](https://facebook.com/Bridgelux)**  
**[youtube.com/user/Bridgelux](https://youtube.com/user/Bridgelux)**  
**[linkedin.com/company/bridgelux-inc-\\_2](https://linkedin.com/company/bridgelux-inc-_2)**  
**WeChat ID: BridgeluxInChina**



46410 Fremont Boulevard  
Fremont, CA 94538 U.S.A.  
Tel (925) 583-8400  
**[www.bridgelux.com](http://www.bridgelux.com)**

© 2022 Bridgelux, Inc. All rights reserved. Product specifications are subject to change without notice. Bridgelux, the Bridgelux stylized logo design, Vero, V Series and V Series HD are registered trademarks, and Decor Series is a trademark of Bridgelux, Inc. All other trademarks are the property of their respective owners.

**Bridgelux V10 F90 Array Series Product Data Sheet DS446-2 Rev. A (12/2022)**