


Bridgelux® SMD 5050 1W 24V

Product Data Sheet DS76

Introduction

SMD 5050



The Bridgelux SMD 5050 high power LED is hot-color targeted, which ensures that the LEDs fall within their specified color bin at the typical application conditions of 85°C. With its broad lumen coverage and wide range of CCT options, the SMD 5050 provides unparalleled design-in flexibility for indoor and outdoor lighting applications. The SMD 5050 is ideal as a drop-in replacement for emitters with an industry standard 5.0mm x 5.0mm footprint.

Features

- Industry-standard 5050 footprint
- 2 bin color control enables tight color control
- Hot-color targeting ensures that color is within the ANSI bin at the typical application conditions of 85°C
- Enables 3- and 5-step MacAdam ellipse custom binning kits
- RoHS compliant and lead free
- Multiple CCT configurations for a wide range of lighting applications

Benefits


- Lower operating and manufacturing cost
- Ease of design and rapid go-to-market
- Uniform consistent white light
- Reliable and constant white point
- Environmentally friendly, complies with standards
- Design flexibility

Contents

Product Feature Map	2
Product Nomenclature	2
Product Test Conditions	2
Product Selection Guide	3
Performance at Commonly Used Drive Currents	5
Electrical Characteristics	9
Absolute Maximum Ratings	10
Product Bin Definitions	11
Performance Curves	14
Typical Radiation Pattern	17
Typical Color Spectrum	18
Mechanical Dimensions	19
Reliability	20
Reflowing Characteristics	21
Packaging	22
Design Resources	24
Precautions	24
Disclaimers	24
About Bridgelux	25


Product Feature Map

Bridgelux SMD LED products come in industry standard package sizes and follow ANSI binning standards. These LEDs are optimized for cost and performance, helping to ensure highly competitive system lumen per dollar performance while addressing the stringent efficacy and reliability standards required for modern lighting applications.

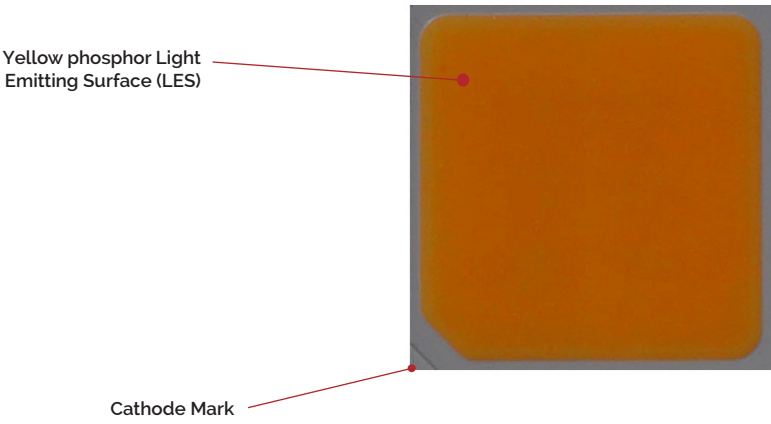

Product Nomenclature

The part number designation for Bridgelux SMD 5050 is explained as follows:

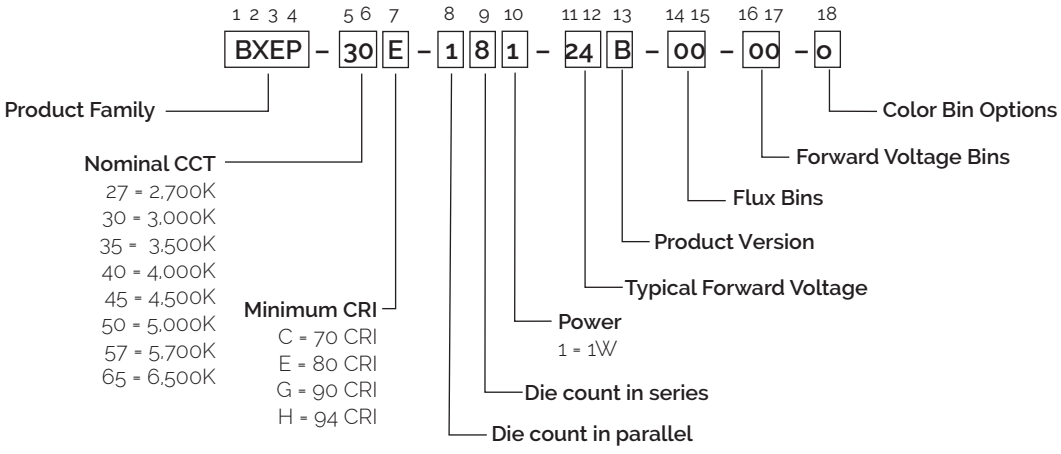

Product Test Conditions

Bridgelux SMD 5050 LEDs are tested and binned with a 10ms pulse of 45mA at T_j (junction temperature) = T_{sp} (solder point temperature) = 25°C. Forward voltage and luminous flux are binned at a $T_j = T_{sp} = 25^\circ\text{C}$, while color is hot targeted at a T_{sp} of 85°C.

Product Selection Guide

The following product configurations are available:

Table 1: Selection Guide, Pulsed Measurement Data at 45mA ($T_j = T_{sp} = 25^\circ\text{C}$)

Part Number ^{1,6}	Nominal CCT ² (K)	CRI ^{3,5}	Nominal Drive Current (mA)	Forward Voltage ^{4,5} (V)			Typical Pulsed Flux (lm) ^{4,5}	Typical Power (W)	Typical Efficacy (lm/W)
				Min	Typical	Max			
BXEP-27C-181-24B-00-00-0	2700	70	45	20.8	22.0	24.6	191	1.0	192
BXEP-27E-181-24B-00-00-0	2700	80	45	20.8	22.0	24.6	170	1.0	172
BXEP-27G-181-24B-00-00-0	2700	90	45	20.8	22.0	24.6	146	1.0	148
BXEP-27H-181-24B-00-00-0	2700	94	45	20.8	22.0	24.6	139	1.0	140
BXEP-30C-181-24B-00-00-0	3000	70	45	20.8	22.0	24.6	198	1.0	200
BXEP-30E-181-24B-00-00-0	3000	80	45	20.8	22.0	24.6	175	1.0	177
BXEP-30G-181-24B-00-00-0	3000	90	45	20.8	22.0	24.6	150	1.0	152
BXEP-30H-181-24B-00-00-0	3000	94	45	20.8	22.0	24.6	143	1.0	145
BXEP-35C-181-24B-00-00-0	3500	70	45	20.8	22.0	24.6	201	1.0	203
BXEP-35E-181-24B-00-00-0	3500	80	45	20.8	22.0	24.6	180	1.0	182
BXEP-40C-181-24B-00-00-0	4000	70	45	20.8	22.0	24.6	206	1.0	208
BXEP-40E-181-24B-00-00-0	4000	80	45	20.8	22.0	24.6	185	1.0	187
BXEP-40G-181-24B-00-00-0	4000	90	45	20.8	22.0	24.6	159	1.0	160
BXEP-40H-181-24B-00-00-0	4000	94	45	20.8	22.0	24.6	152	1.0	154
BXEP-45C-181-24B-00-00-0	4500	70	45	20.8	22.0	24.6	206	1.0	208
BXEP-45E-181-24B-00-00-0	4500	80	45	20.8	22.0	24.6	185	1.0	187
BXEP-50C-181-24B-00-00-0	5000	70	45	20.8	22.0	24.6	206	1.0	208
BXEP-50E-181-24B-00-00-0	5000	80	45	20.8	22.0	24.6	185	1.0	187
BXEP-57C-181-24B-00-00-0	5700	70	45	20.8	22.0	24.6	204	1.0	206
BXEP-57E-181-24B-00-00-0	5700	80	45	20.8	22.0	24.6	183	1.0	185
BXEP-65C-181-24B-00-00-0	6500	70	45	20.8	22.0	24.6	200	1.0	202
BXEP-65E-181-24B-00-00-0	6500	80	45	20.8	22.0	24.6	181	1.0	183

Notes for Table 1:

- The last 7 characters (including hyphens '-') refer to flux bins, forward voltage bins, and color bin options, respectively. "00-00-0" denotes the full distribution of flux, forward voltage, and 5 SDCM color.
Example: BXEP-30E-181-24B-00-00-0 refers to the full distribution of flux, forward voltage, and color within a 3000K 5-step ANSI standard chromaticity region with a minimum of 80CRI, 1x8 die configuration, 1w power, 22V typical forward voltage.
- Product CCT is hot targeted at $T_{sp} = 85^\circ\text{C}$. Nominal CCT as defined by ANSI C78.377-2011.
- Listed CRIs are minimum values and include test tolerance.
- Products tested under pulsed condition (10ms pulse width) at nominal drive current where $T_j = T_{sp} = 25^\circ\text{C}$.
- Bridgelux maintains a $\pm 7.5\%$ tolerance on luminous flux measurements, $\pm 0.1\text{V}$ tolerance on forward voltage measurements, and ± 2 tolerance on CRI measurements for the SMD 5050.
- Refer to Table 6 and Table 7 for Bridgelux SMD 5050 Luminous Flux Binning and Forward Voltage Binning information.

Product Selection Guide

The following product configurations are available:

Table 2: Selection Guide, Stabilized DC Performance ($T_{sp} = 85^{\circ}\text{C}$)^{6,7}

Part Number ^{2,5}	Nominal CCT ² (K)	CRI ^{3,4}	Nominal Drive Current (mA)	Forward Voltage ⁴ (V)			Typical DC Flux (lm) ⁴	Typical Power (W)	Typical Efficacy (lm/W)
				Min	Typical	Max			
BXEP-27C-181-24B-00-00-0	2700	70	45	20.4	21.6	24.1	177	1.0	182
BXEP-27E-181-24B-00-00-0	2700	80	45	20.4	21.6	24.1	158	1.0	163
BXEP-27G-181-24B-00-00-0	2700	90	45	20.4	21.6	24.1	136	1.0	140
BXEP-27H-181-24B-00-00-0	2700	94	45	20.4	21.6	24.1	129	1.0	133
BXEP-30C-181-24B-00-00-0	3000	70	45	20.4	21.6	24.1	184	1.0	189
BXEP-30E-181-24B-00-00-0	3000	80	45	20.4	21.6	24.1	163	1.0	168
BXEP-30G-181-24B-00-00-0	3000	90	45	20.4	21.6	24.1	140	1.0	144
BXEP-30H-181-24B-00-00-0	3000	94	45	20.4	21.6	24.1	133	1.0	137
BXEP-35C-181-24B-00-00-0	3500	70	45	20.4	21.6	24.1	187	1.0	192
BXEP-35E-181-24B-00-00-0	3500	80	45	20.4	21.6	24.1	167	1.0	172
BXEP-40C-181-24B-00-00-0	4000	70	45	20.4	21.6	24.1	191	1.0	197
BXEP-40E-181-24B-00-00-0	4000	80	45	20.4	21.6	24.1	172	1.0	177
BXEP-40G-181-24B-00-00-0	4000	90	45	20.4	21.6	24.1	147	1.0	152
BXEP-40H-181-24B-00-00-0	4000	94	45	20.4	21.6	24.1	142	1.0	146
BXEP-45C-181-24B-00-00-0	4500	70	45	20.4	21.6	24.1	191	1.0	197
BXEP-45E-181-24B-00-00-0	4500	80	45	20.4	21.6	24.1	172	1.0	177
BXEP-50C-181-24B-00-00-0	5000	70	45	20.4	21.6	24.1	191	1.0	197
BXEP-50E-181-24B-00-00-0	5000	80	45	20.4	21.6	24.1	172	1.0	177
BXEP-57C-181-24B-00-00-0	5700	70	45	20.4	21.6	24.1	189	1.0	195
BXEP-57E-181-24B-00-00-0	5700	80	45	20.4	21.6	24.1	170	1.0	175
BXEP-65C-181-24B-00-00-0	6500	70	45	20.4	21.6	24.1	186	1.0	191
BXEP-65E-181-24B-00-00-0	6500	80	45	20.4	21.6	24.1	168	1.0	173

Notes for Table 2:

- The last 7 characters (including hyphens '-') refer to flux bins, forward voltage bins, and color bin options, respectively. "00-00-0" denotes the full distribution of flux, forward voltage, and 5 SDCM color.
Example: BXEP-30E-181-24B-00-00-0 refers to the full distribution of flux, forward voltage, and color within a 3000K 5-step ANSI standard chromaticity region with a minimum of 80CRI, 1x8 die configuration, 1w power, 21.6V typical forward voltage.
- Product CCT is hot targeted at $T_{sp} = 85^{\circ}\text{C}$. Nominal CCT as defined by ANSI C78.377-2011.
- Listed CRIs are minimum values and include test tolerance.
- Bridgelux maintains a $\pm 7.5\%$ tolerance on luminous flux measurements, $\pm 0.1\text{V}$ tolerance on forward voltage measurements, and ± 2 tolerance on CRI measurements for the SMD 5050.
- Refer to Table 6 and Table 7 for Bridgelux SMD 5050 Luminous Flux Binning and Forward Voltage Binning information.
- Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.
- Typical performance is estimated based on operation under DC (direct current) with LED emitter mounted onto a heat sink with thermal interface material and the solder point temperature maintained at 85°C . Based on Bridgelux test setup, values may vary depending on the thermal design of the luminaire and/or the exposed environment to which the product is subjected.

Performance at Commonly Used Drive Currents

SMD 5050 LEDs are tested to the specifications shown using the nominal drive currents in Table 1. SMD 5050 may also be driven at other drive currents dependent on specific application design requirements. The performance at any drive current can be derived from the current vs. voltage characteristics shown in Figure 2 and the relative luminous flux vs. current characteristics shown in Figure 3. The performance at commonly used drive currents is summarized in Table 3.

Table 3: Performance at Commonly Used Drive Currents

Part Number	CRI	Drive Current ¹ (mA)	Typical V_f $T_{sp} = 25^\circ\text{C}$ (V)	Typical Power $T_{sp} = 25^\circ\text{C}$ (W)	Typical Pulsed Flux ² $T_{sp} = 25^\circ\text{C}$ (lm)	Typical DC Flux ³ $T_{sp} = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_{sp} = 25^\circ\text{C}$ (lm/W)
BXEP-27C-181-24B-00-00-0	70	45	22.0	1.0	191	177	192
		90	22.9	2.1	367	314	178
		135	23.7	3.2	533	453	167
		180	24.4	4.4	687	578	156
		225	25.1	5.7	833	694	147
		240	25.4	6.1	881	729	145
BXEP-27E-181-24B-00-00-0	80	45	22.0	1.0	170	158	172
		90	22.9	2.1	328	280	159
		135	23.7	3.2	476	404	149
		180	24.4	4.4	613	515	139
		225	25.1	5.7	743	619	131
		240	25.4	6.1	786	650	129
BXEP-27G-181-24B-00-00-0	90	45	22.0	1.0	146	136	148
		90	22.9	2.1	282	241	137
		135	23.7	3.2	409	347	128
		180	24.4	4.4	528	443	120
		225	25.1	5.7	640	532	113
		240	25.4	6.1	676	560	111
BXEP-27H-181-24B-00-00-0	94	45	22.0	1.0	139	129	140
		90	22.9	2.1	268	229	130
		135	23.7	3.2	389	330	122
		180	24.4	4.4	502	421	114
		225	25.1	5.7	608	506	108
		240	25.4	6.1	643	532	106
BXEP-30C-181-24B-00-00-0	70	45	22.0	1.0	198	184	200
		90	22.9	2.1	381	326	185
		135	23.7	3.2	554	470	173
		180	24.4	4.4	713	599	162
		225	25.1	5.7	865	720	153
		240	25.4	6.1	914	757	150

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7.5\%$ tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

Performance at Commonly Used Drive Currents

SMD 5050 LEDs are tested to the specifications shown using the nominal drive currents in Table 1. SMD 5050 may also be driven at other drive currents dependent on specific application design requirements. The performance at any drive current can be derived from the current vs. voltage characteristics shown in Figure 2 and the relative luminous flux vs. current characteristics shown in Figure 3. The performance at commonly used drive currents is summarized in Table 3.

Table 3: Performance at Commonly Used Drive Currents

Part Number	CRI	Drive Current ¹ (mA)	Typical V_f $T_{sp} = 25^\circ\text{C}$ (V)	Typical Power $T_{sp} = 25^\circ\text{C}$ (W)	Typical Pulsed Flux ² $T_{sp} = 25^\circ\text{C}$ (lm)	Typical DC Flux ³ $T_{sp} = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_{sp} = 25^\circ\text{C}$ (lm/W)
BXEP-30E-181-24B-00-00-0	80	45	22.0	1.0	175	163	177
		90	22.9	2.1	337	288	164
		135	23.7	3.2	490	416	153
		180	24.4	4.4	632	531	144
		225	25.1	5.7	766	637	135
		240	25.4	6.1	809	670	133
BXEP-30G-181-24B-00-00-0	90	45	22.0	1.0	150	140	152
		90	22.9	2.1	290	248	141
		135	23.7	3.2	421	357	132
		180	24.4	4.4	542	456	123
		225	25.1	5.7	658	547	116
		240	25.4	6.1	695	575	114
BXEP-30H-181-24B-00-00-0	94	45	22.0	1.0	143	133	145
		90	22.9	2.1	276	236	134
		135	23.7	3.2	401	340	125
		180	24.4	4.4	516	434	118
		225	25.1	5.7	626	521	111
		240	25.4	6.1	662	548	109
BXEP-35C-181-24B-00-00-0	70	45	22.0	1.0	201	187	203
		90	22.9	2.1	387	331	188
		135	23.7	3.2	562	477	176
		180	24.4	4.4	724	609	165
		225	25.1	5.7	878	731	155
		240	25.4	6.1	928	768	152
BXEP-35E-181-24B-00-00-0	80	45	22.0	1.0	180	167	182
		90	22.9	2.1	347	297	169
		135	23.7	3.2	505	428	158
		180	24.4	4.4	650	546	148
		225	25.1	5.7	788	656	139
		240	25.4	6.1	833	690	137

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7.5\%$ tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 3: Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V_f $T_{sp} = 25^\circ\text{C}$ (V)	Typical Power $T_{sp} = 25^\circ\text{C}$ (W)	Typical Pulsed Flux ² $T_{sp} = 25^\circ\text{C}$ (lm)	Typical DC Flux ³ $T_{sp} = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_{sp} = 25^\circ\text{C}$ (lm/W)
BXEP-40C-181-24B-00-00-0	70	45	22.0	1.0	206	191	208
		90	22.9	2.1	397	339	193
		135	23.7	3.2	577	489	180
		180	24.4	4.4	743	624	169
		225	25.1	5.7	901	750	159
		240	25.4	6.1	952	788	156
BXEP-40E-181-24B-00-00-0	80	45	22.0	1.0	185	172	187
		90	22.9	2.1	357	305	174
		135	23.7	3.2	519	440	162
		180	24.4	4.4	669	562	152
		225	25.1	5.7	811	675	143
		240	25.4	6.1	857	709	141
BXEP-40G-181-24B-00-00-0	90	45	22.0	1.0	159	147	160
		90	22.9	2.1	306	261	148
		135	23.7	3.2	444	377	139
		180	24.4	4.4	572	481	130
		225	25.1	5.7	694	577	123
		240	25.4	6.1	733	607	120
BXEP-40H-181-24B-00-00-0	94	45	22.0	1.0	152	142	154
		90	22.9	2.1	294	251	143
		135	23.7	3.2	427	362	134
		180	24.4	4.4	550	462	125
		225	25.1	5.7	667	555	118
		240	25.4	6.1	705	583	116
BXEP-45C-181-24B-00-00-0	70	45	22.0	1.0	206	191	208
		90	22.9	2.1	397	339	193
		135	23.7	3.2	577	489	180
		180	24.4	4.4	743	624	169
		225	25.1	5.7	901	750	159
		240	25.4	6.1	952	788	156
BXEP-45E-181-24B-00-00-0	80	45	22.0	1.0	185	172	187
		90	22.9	2.1	357	305	174
		135	23.7	3.2	519	440	162
		180	24.4	4.4	669	562	152
		225	25.1	5.7	811	675	143
		240	25.4	6.1	857	709	141

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7.5\%$ tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 3: Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V_f $T_{sp} = 25^\circ\text{C}$ (V)	Typical Power $T_{sp} = 25^\circ\text{C}$ (W)	Typical Pulsed Flux ² $T_{sp} = 25^\circ\text{C}$ (lm)	Typical DC Flux ³ $T_{sp} = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_{sp} = 25^\circ\text{C}$ (lm/W)
BXEP-50C-181-24B-00-00-0	70	45	22.0	1.0	206	191	208
		90	22.9	2.1	397	339	193
		135	23.7	3.2	577	489	180
		180	24.4	4.4	743	624	169
		225	25.1	5.7	901	750	159
		240	25.4	6.1	952	788	156
BXEP-50E-181-24B-00-00-0	80	45	22.0	1.0	185	172	187
		90	22.9	2.1	357	305	174
		135	23.7	3.2	519	440	162
		180	24.4	4.4	669	562	152
		225	25.1	5.7	811	675	143
		240	25.4	6.1	857	709	141
BXEP-57C-181-24B-00-00-0	70	45	22.0	1.0	204	189	206
		90	22.9	2.1	393	336	191
		135	23.7	3.2	571	485	179
		180	24.4	4.4	736	618	167
		225	25.1	5.7	892	742	158
		240	25.4	6.1	943	780	155
BXEP-57E-181-24B-00-00-0	80	45	22.0	1.0	183	170	185
		90	22.9	2.1	353	302	172
		135	23.7	3.2	513	436	161
		180	24.4	4.4	661	556	150
		225	25.1	5.7	802	667	142
		240	25.4	6.1	847	701	139
BXEP-65C-181-24B-00-00-0	70	45	22.0	1.0	200	186	202
		90	22.9	2.1	385	329	187
		135	23.7	3.2	559	475	175
		180	24.4	4.4	721	606	164
		225	25.1	5.7	874	727	155
		240	25.4	6.1	924	764	152
BXEP-65E-181-24B-00-00-0	80	45	22.0	1.0	181	168	183
		90	22.9	2.1	349	299	170
		135	23.7	3.2	507	431	159
		180	24.4	4.4	654	549	149
		225	25.1	5.7	793	660	140
		240	25.4	6.1	838	694	138

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7.5\%$ tolerance on flux measurements.
3. Typical stabilized DC performance values are provided as reference only and are not a guarantee of performance.

Electrical Characteristics

Table 4: Electrical Characteristics

Part Number ¹	Drive Current (mA)	Forward Voltage (V) ^{2,3}			Typical Temperature Coefficient of Forward Voltage $\Delta V_f / \Delta T$ (mV/°C)	Typical Thermal Resistance Junction to Solder Point ⁴ R_{j-sp} (°C/W)
		Minimum	Typical	Maximum		
BXEP-XXX-181-24B-00-00-0	45	20.8	22	24.6	-9.3	3.1

Notes for Table 4:

- The last 7 characters (including hyphens '-') refer to flux bins, forward voltage bins, and color bin options, respectively. "00-00-0" denotes the full distribution of flux, forward voltage, and 5 SDCM color.
Example: BXEP-30E-181-24B-00-00-0 refers to the full distribution of flux, forward voltage, and color within a 3000K 5-step ANSI standard chromaticity region with a minimum of 80CRI, 1x8 die configuration, 1W power, 22V typical forward voltage.
- Bridgelux maintains a tolerance of $\pm 0.1V$ on forward voltage measurements. Voltage minimum and maximum values at the nominal drive current are guaranteed by 100% test.
- Products tested under pulsed condition (10ms pulse width) at nominal drive current where $T_{sp} = 25^\circ C$.
- Thermal resistance value was calculated using total electrical input power; optical power was not subtracted from input power.

Absolute Maximum Ratings

Table 5: Maximum Ratings

Parameter	Maximum Rating
LED Junction Temperature (T_j)	125°C
Storage Temperature	-40°C to +105°C
Operating Solder Point Temperature (T_{sp})	-40°C to +105°C
Soldering Temperature	260°C or lower for a maximum of 10 seconds
Maximum Drive Current ¹	240mA
Maximum Peak Pulsed Forward Current ²	300mA
Maximum Reverse Voltage	-
Moisture Sensitivity Rating	MSL 3
Electrostatic Discharge	2kV HBM. JEDEC-JS-001-HBM and JEDEC-JS-001-2012

Notes for Table 5:

1. The condition of the maximum drive current is limited, Figure 7 can be reference.
2. Bridgelux recommends a maximum duty cycle of 10% and pulse width of 10 ms when operating LED SMD at maximum peak pulsed current specified. Maximum peak pulsed current indicate values where LED SMD can be driven without catastrophic failures.
3. The maximum drive current for LM80 test result is based on 356% nominal drive current listed.

Product Bin Definitions

Table 6 lists the standard photometric luminous flux bins for Bridgelux SMD 5050 LEDs. Although several bins are listed, product availability in a particular bin varies by production run and by product performance. Not all bins are available in all CCTs.

Table 6: Luminous Flux Bin Definitions at 45mA, $T_{sp}=25^{\circ}\text{C}$

Bin Code	Minimum	Maximum	Unit	Condition
Y6	120	130	lm	$I_F=45\text{mA}$
Y7	130	140		
Y8	140	150		
Y9	150	160		
Z1	160	170		
Z2	170	180		
Z3	180	195		
Z4	195	210		
Z5	210	225		

Note for Table 6:

1. Bridgelux maintains a tolerance of $\pm 7.5\%$ on luminous flux measurements.

Table 7: Forward Voltage Bin Definition at 45mA, $T_{sp}=25^{\circ}\text{C}$

Bin Code	Minimum	Maximum	Unit	Condition
FG	20	21	V	$I_F=45\text{mA}$
FH	21	22		
HD	22	23		
HE	23	24		
HF	24	25		

Note for Table 7:

1. Bridgelux maintains a tolerance of $\pm 0.1\text{V}$ on forward voltage measurements.

Product Bin Definitions

Table 8: 3- and 5-step MacAdam Ellipse Color Bin Definitions



CCT	Color Space	Center Point		Major Axis	Minor Axis	Ellipse Rotation Angle	Color Bin
		X	Y				
2700K	3 SDCM	0.4578	0.4101	0.00810	0.00420	53.70	3
	5 SDCM	0.4578	0.4101	0.01350	0.00700	53.70	5
3000K	3 SDCM	0.4338	0.4030	0.00834	0.00408	53.22	3
	5 SDCM	0.4338	0.4030	0.01390	0.00680	53.22	5
3500K	3 SDCM	0.4073	0.3917	0.00927	0.00414	54.00	3
	5 SDCM	0.4073	0.3917	0.01545	0.00690	54.00	5
4000K	3 SDCM	0.3818	0.3797	0.00939	0.00402	53.72	3
	5 SDCM	0.3818	0.3797	0.01565	0.00670	53.72	5
4500K	3 SDCM	0.3611	0.3658	0.00756	0.00338	57.58	3
	5 SDCM	0.3611	0.3658	0.01260	0.00563	57.58	5
5000K	3 SDCM	0.3447	0.3553	0.00822	0.00354	59.62	3
	5 SDCM	0.3447	0.3553	0.01370	0.00590	59.62	5
5700K	3 SDCM	0.3287	0.3417	0.00746	0.00320	59.09	3
	5 SDCM	0.3287	0.3417	0.01243	0.00533	59.09	5
6500K	3 SDCM	0.3123	0.3282	0.00669	0.00285	58.57	3
	5 SDCM	0.3123	0.3282	0.01115	0.00475	58.57	5

Notes for Table 8:

1. Color binning at $T_{sp}=85^{\circ}\text{C}$
2. Bridgelux maintains a tolerance of ± 0.007 on x and y color coordinates in the CIE 1931 color space.

Product Bin Definitions

Figure 1: C.I.E. 1931 Chromaticity Diagram (2 Color Bin Structure, hot-color targeted at $T_{sp}=85^{\circ}\text{C}$)

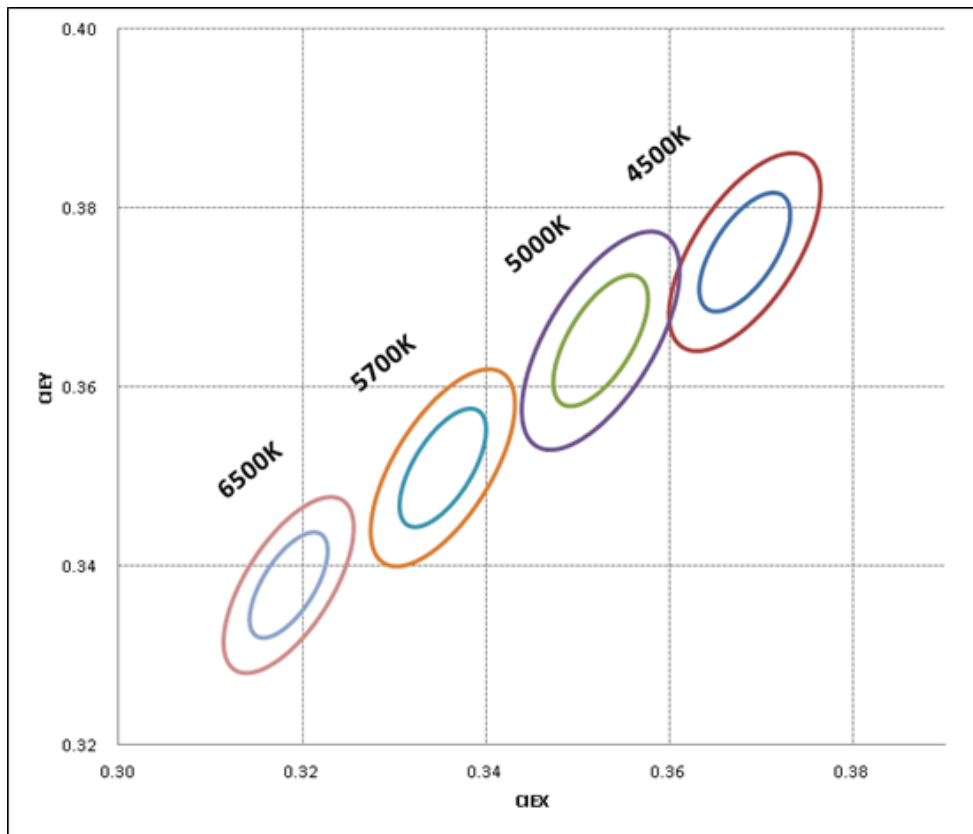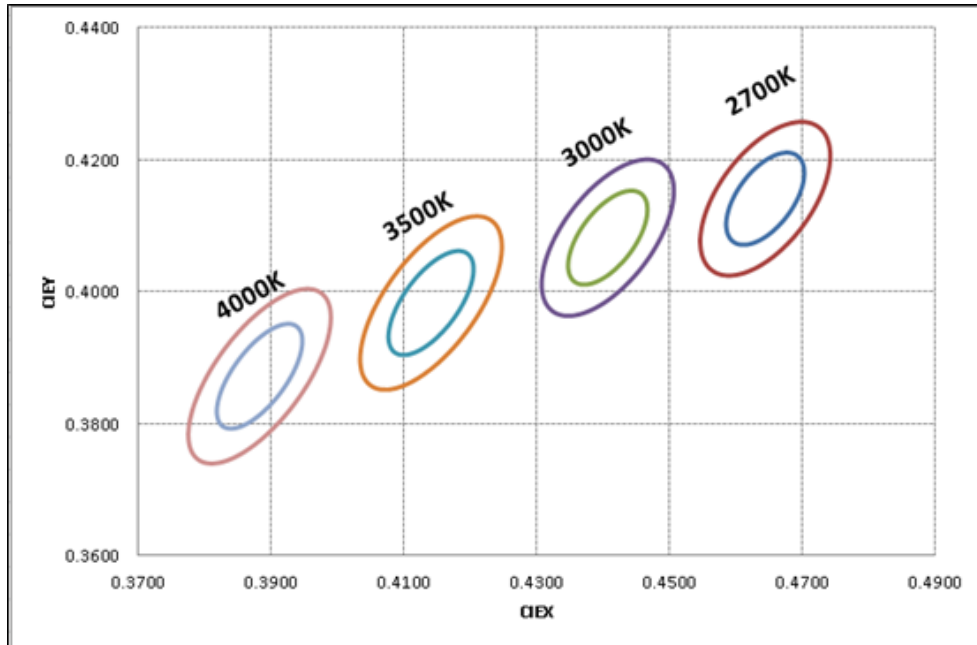

Performance Curves

Figure 2: Drive Current vs. Voltage ($T_{sp}=25^{\circ}\text{C}$)


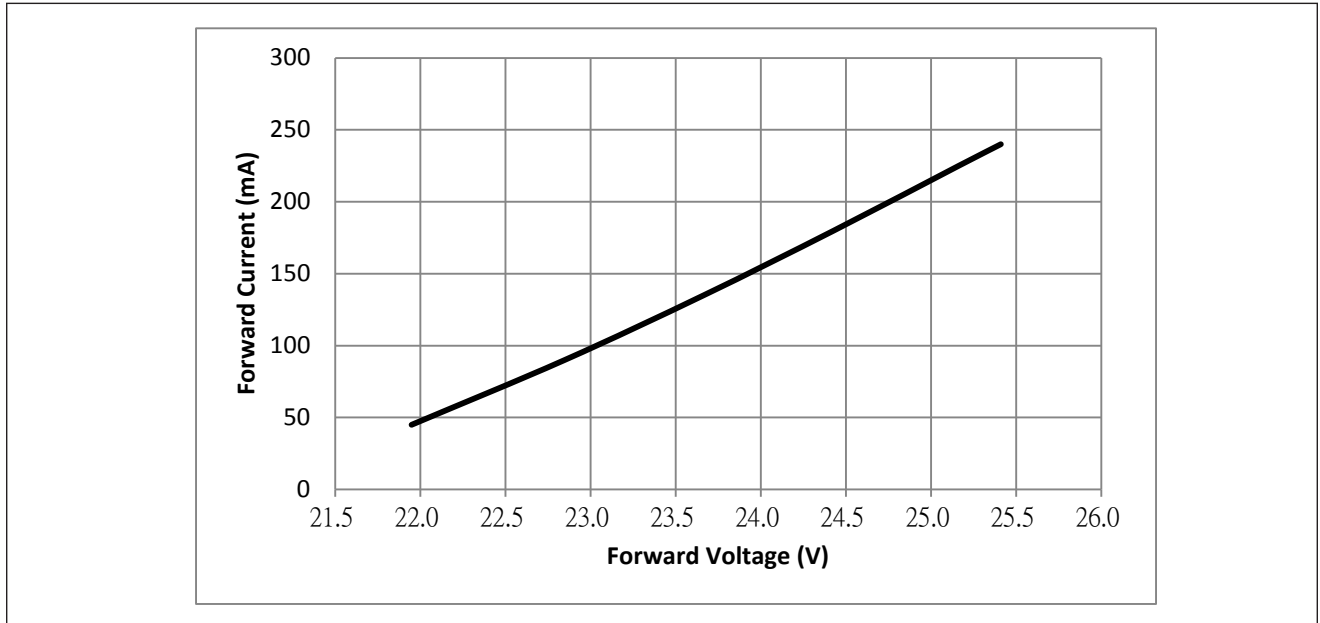


Figure 3: Typical Relative Luminous Flux vs. Drive Current ($T_{sp}=25^{\circ}\text{C}$)

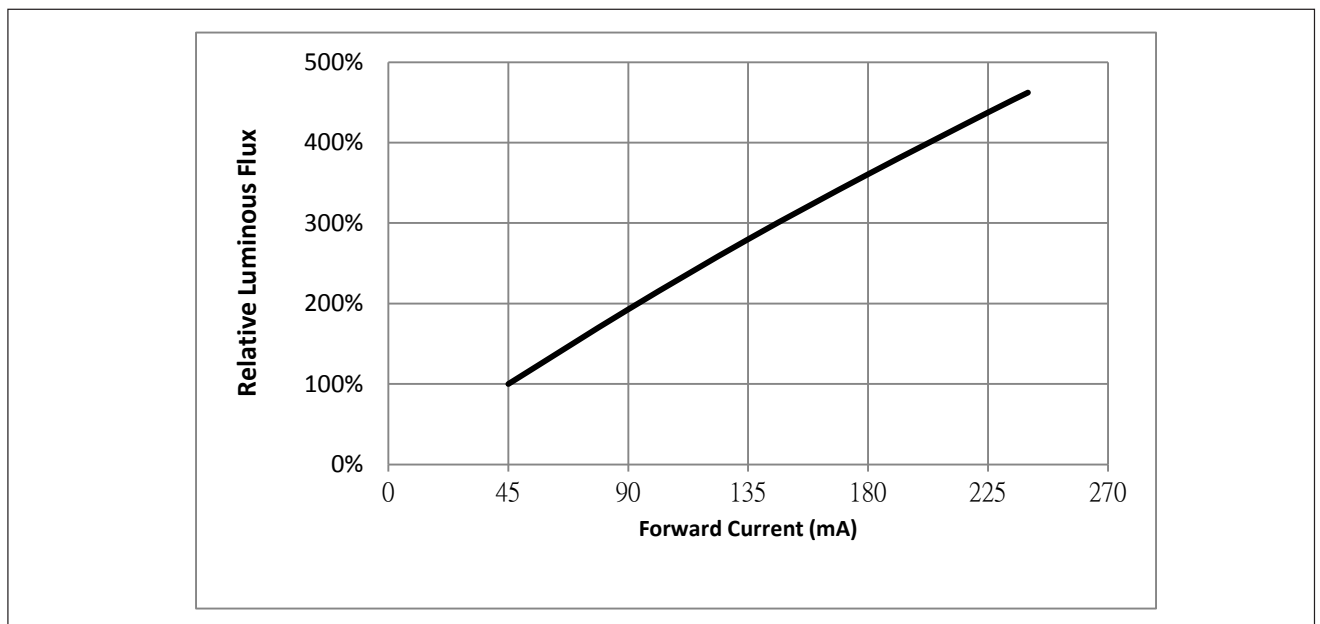

Note for Figure 3:

1. Bridgelux does not recommend driving high power LEDs at low currents. Doing so may produce unpredictable results. Pulse width modulation (PWM) is recommended for dimming effects.

Performance Curves

Figure 4: Typical Relative DC Flux vs. Solder Point Temperature


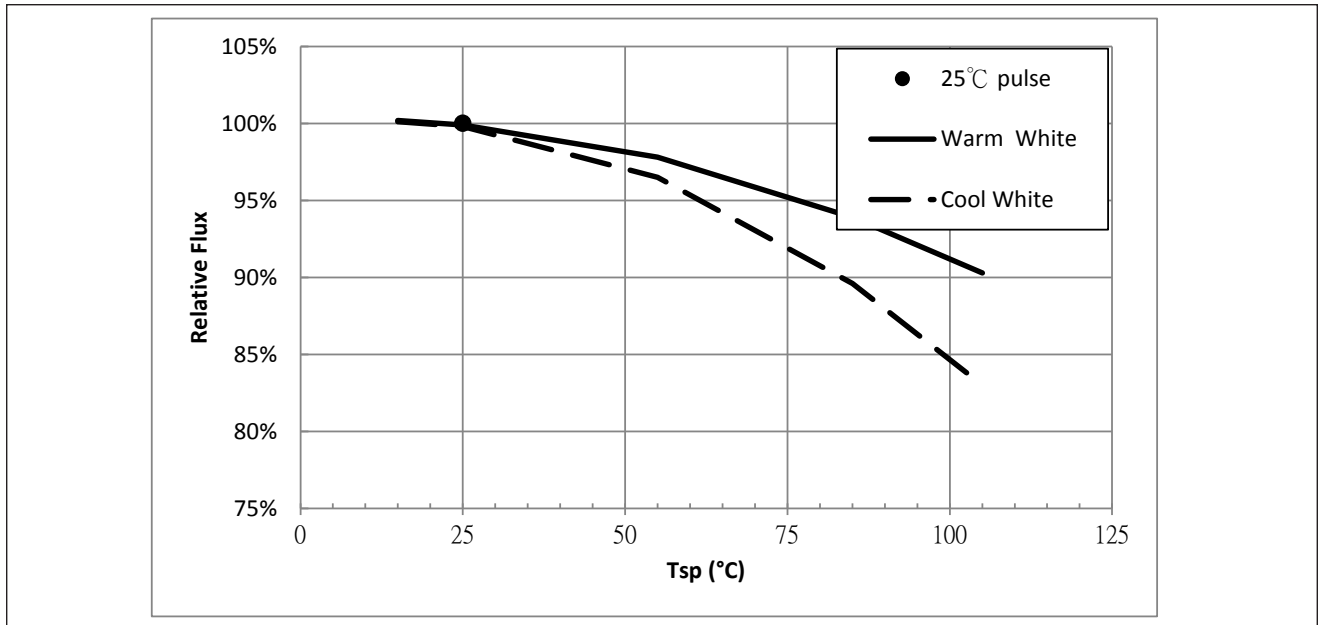


Figure 5: Typical DC ccx Shift vs. Solder Point Temperature

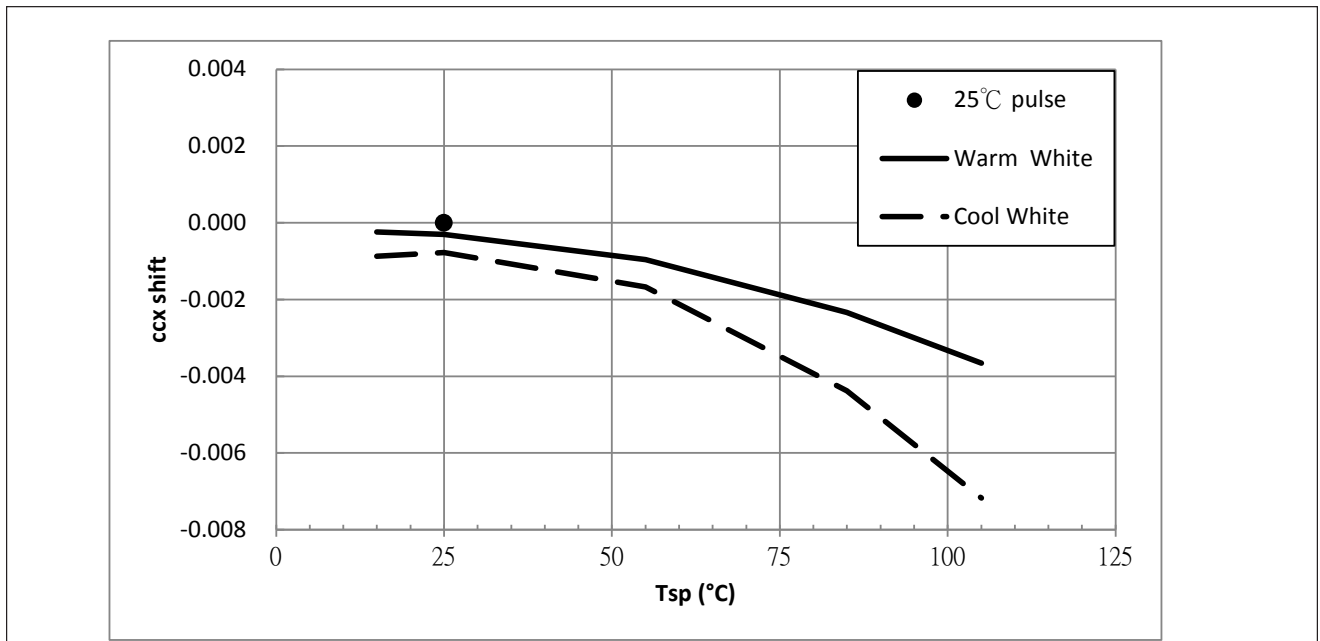


Notes for Figures 4 & 5:

1. Characteristics shown for warm white based on 2700K and 80 CRI.
2. Characteristics shown for cool white based on 5700K and 80 CRI.
3. For other color SKUs, the shift in color will vary. Please contact your Bridgelux Sales Representative for more information.

Performance Curves


Figure 6: Typical DC ccy Shift vs. Solder Point Temperature

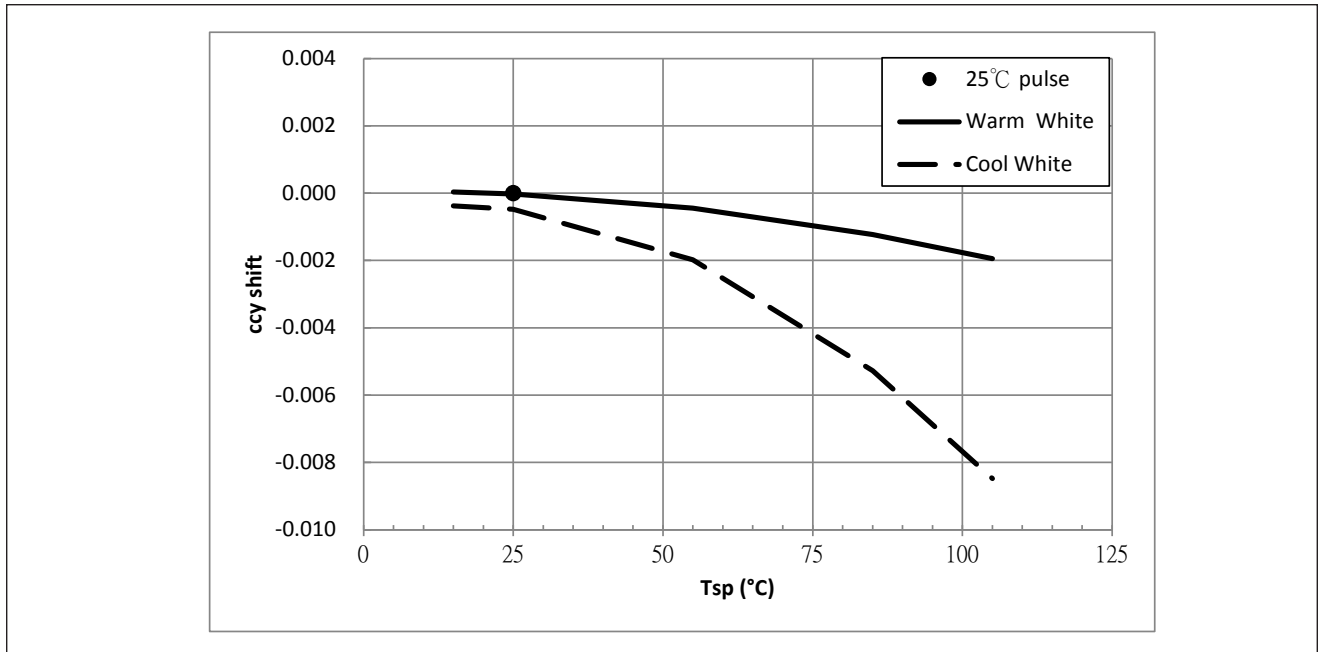

Notes for Figure 6:


1. Characteristics shown for warm white based on 2700K and 80 CRI.
2. Characteristics shown for cool white based on 5700K and 80 CRI.
3. For other color SKUs, the shift in color will vary. Please contact your Bridgelux Sales Representative for more information.

Figure 7: Drive Current Derating Curve

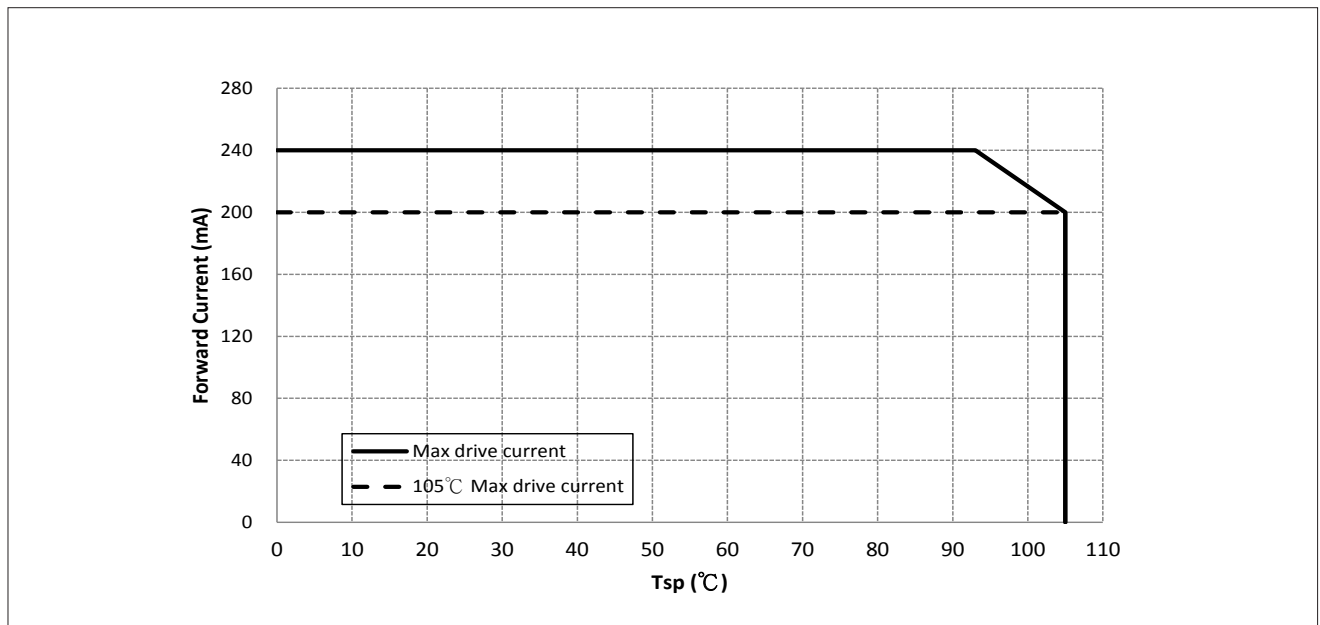

Typical Radiation Pattern


Figure 8: Typical Spatial Radiation Pattern at 45mA, $T_{sp} = 25^{\circ}\text{C}$

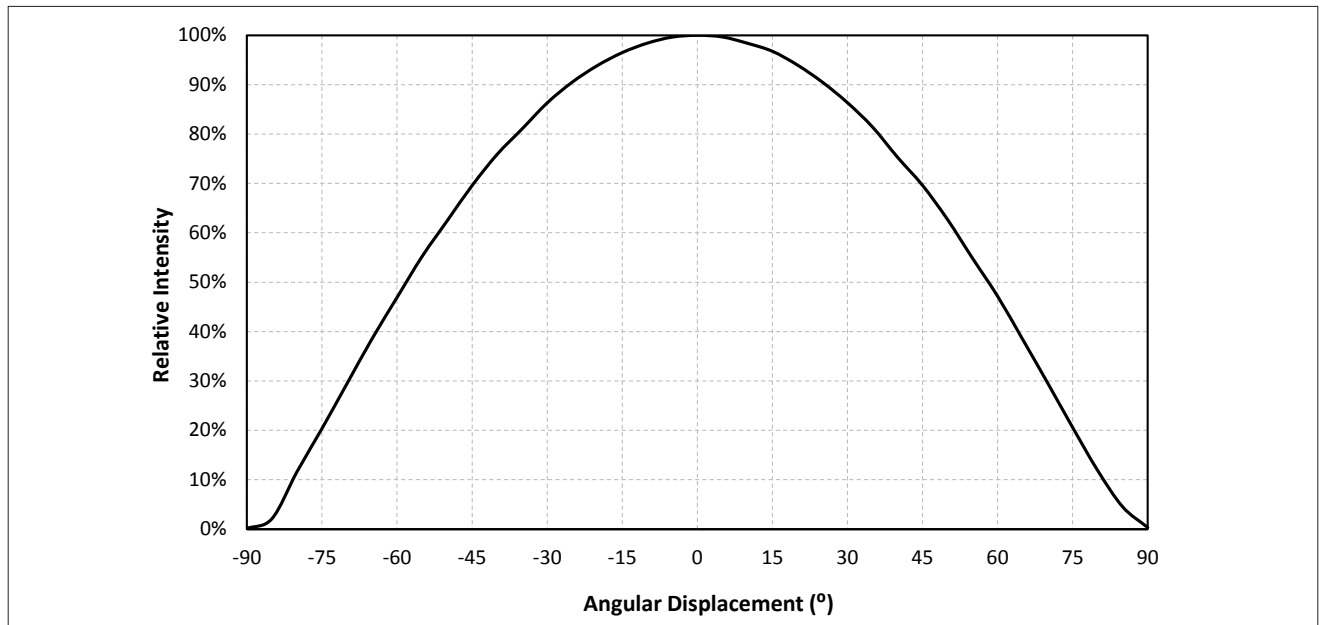

Notes for Figure 8:


1. Typical viewing angle is 116° .
2. The viewing angle is defined as the off axis angle from the centerline where luminous intensity (lv) is $\frac{1}{2}$ of the peak value.

Figure 9: Typical Polar Radiation Pattern at 45mA, $T_{sp} = 25^{\circ}\text{C}$

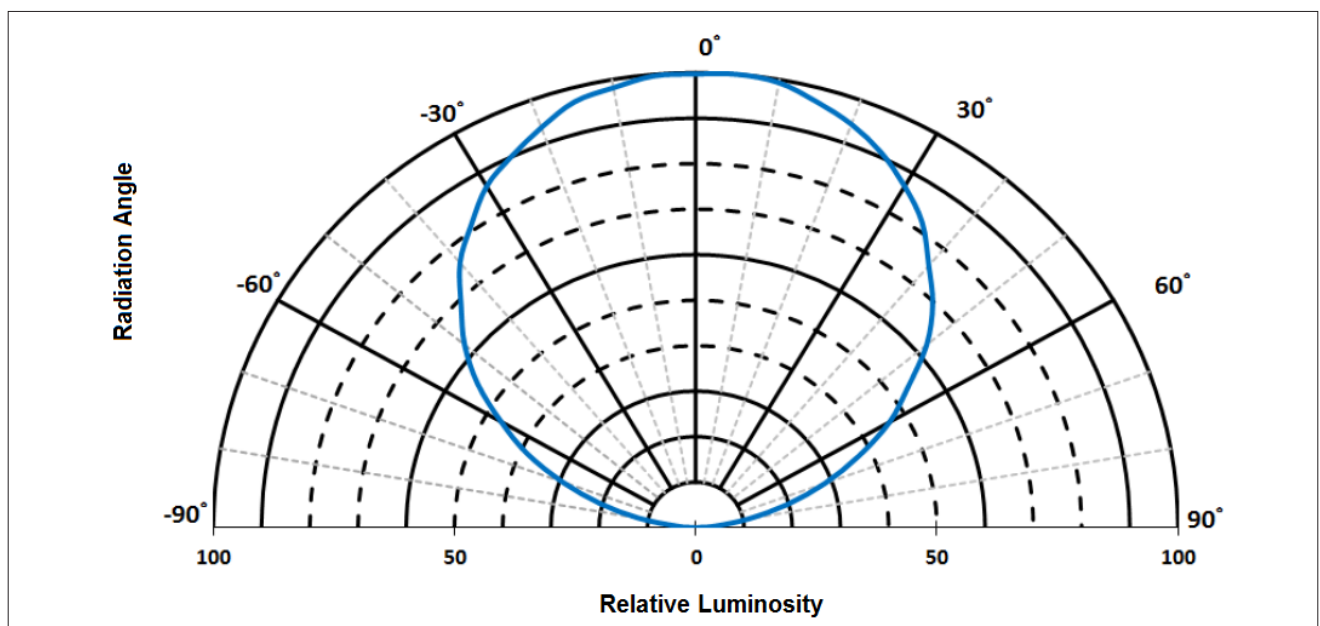

Typical Color Spectrum

Figure 10: Typical Color Spectrum

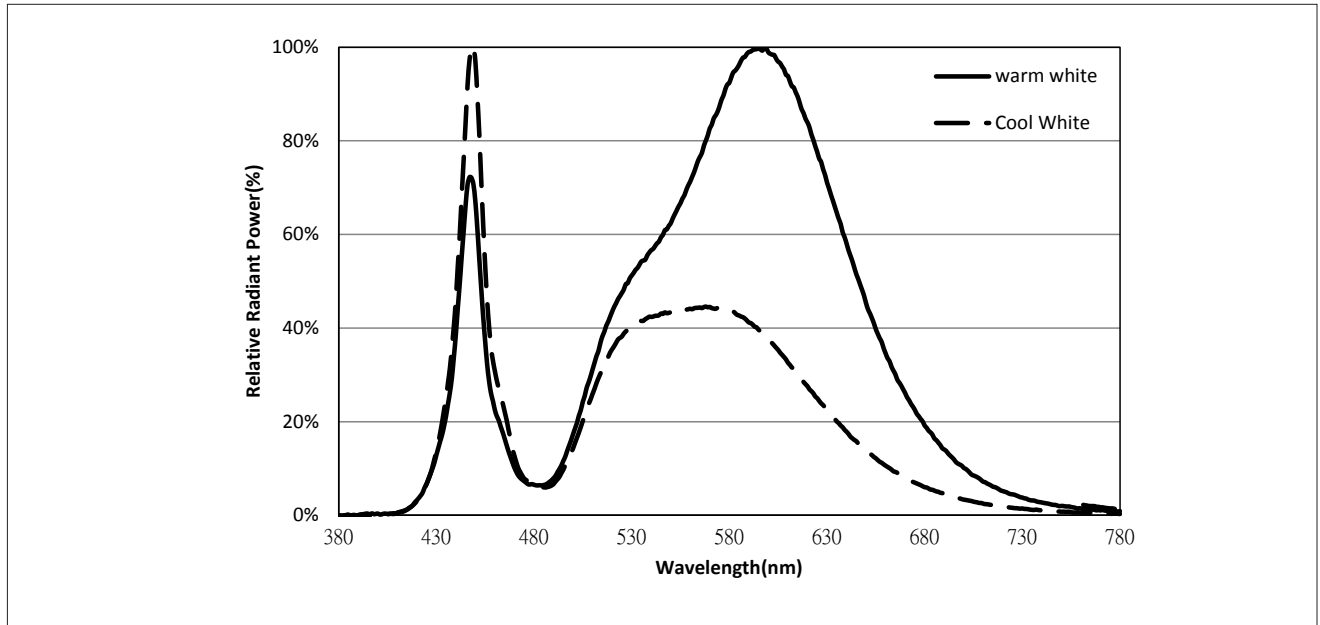


Notes for Figure 10:

1. Color spectra measured at nominal current for $T_{sp} = 25^{\circ}\text{C}$
2. Color spectra shown for warm white is 2700K and 80 CRI.
3. Color spectra shown for cool white is 5700K and 80 CRI.


Mechanical Dimensions

Figure 11: Drawing for SMD 5050

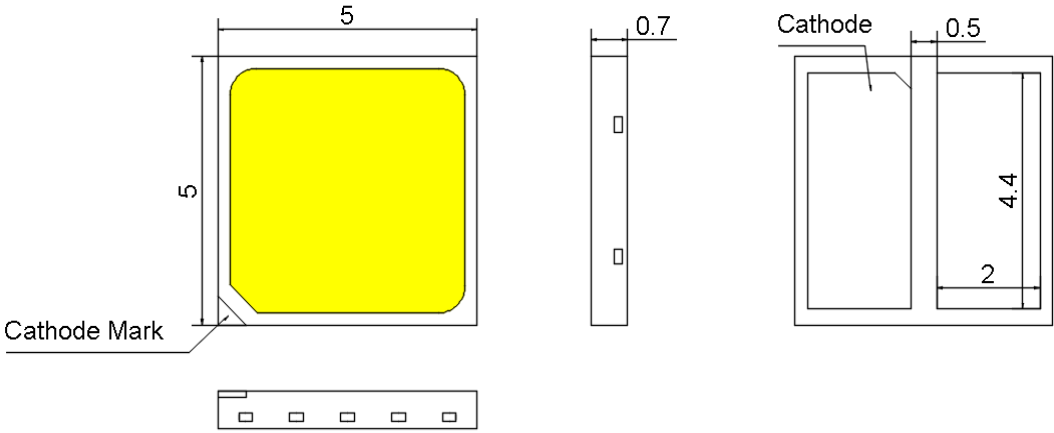

- Notes for Figure 11:
- 1. Drawings are not to scale.
 - 2. Drawing dimensions are in millimeters.
 - 3. Unless otherwise specified, tolerances are $\pm 0.10\text{mm}$.

Recommended PCB Soldering Pad Pattern

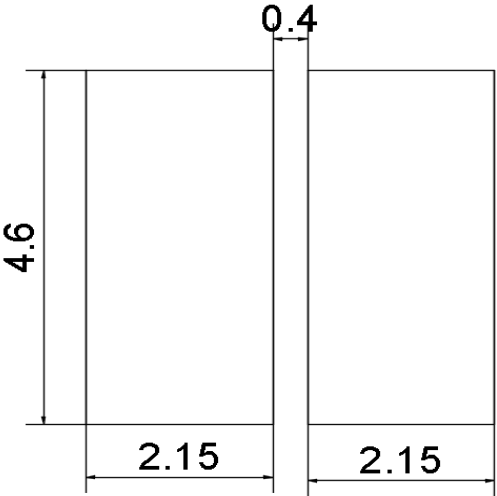

Reliability

Table 9: Reliability Test Items and Conditions

No .	Items	Reference Standard	Test Conditions	Drive Current	Test Duration	Units Failed/Tested
1	Moisture/Reflow Sensitivity	J-STD-020E	$T_{sld} = 260^{\circ}\text{C}$, 10sec, Precondition: 60°C , 60%RH, 168hr	-	3 reflows	0/22
2	Low Temperature Storage	JESD22-A119	$T_a = -40^{\circ}\text{C}$	-	1000 hours	0/22
3	High Temperature Storage	JESD22-A103D	$T_a = 105^{\circ}\text{C}$	-	1000 hours	0/22
4	Low Temperature Operating Life	JESD22-A108D	$T_a = -40^{\circ}\text{C}$	160mA	1000 hours	0/22
5	Temperature Humidity Operating Life	JESD22-A101C	$T_{sp} = 85^{\circ}\text{C}$, RH=85%	160mA	1000 hours	0/22
6	High Temperature Operating Life	JESD22-A108D	$T_{sp} = 105^{\circ}\text{C}$	200mA	1000 hours	0/22
7	Power switching	IEC62717:2014	$T_{sp} = 105^{\circ}\text{C}$ 30 sec on, 30 sec off	200mA	30000 cycles	0/22
8	Thermal Shock	JESD22-A106B	$T_a = -40^{\circ}\text{C} \sim 100^{\circ}\text{C}$; Dwell : 15min; Transfer: 10sec	-	200 cycles	0/22
9	Temperature Cycle	JESD22-A104E	$T_a = -40^{\circ}\text{C} \sim 100^{\circ}\text{C}$; Dwell at extreme temperature: 15min; Ramp rate < $105^{\circ}\text{C}/\text{min}$	-	200 cycles	0/22
10	Electrostatic Discharge	JS-001-2012	HBM, 2kV, 15k Ω , 100pF, Alternately positive or negative	-	-	0/22

Passing Criteria


Item	Symbol	Test Condition	Passing Criteria
Forward Voltage	Vf	45mA	$\Delta V_f < 10\%$
Luminous Flux	Fv	45mA	$\Delta F_v < 30\%$
Chromaticity Coordinates	(x, y)	45mA	$\Delta u'v' < 0.007$

Notes for Table 9:

1. Measurements are performed after allowing the LEDs to return to room temperature
2. T_{sld} : reflow soldering temperature; T_a : ambient temperature


Reflowing Characteristics

Figure 12 : Reflow Profile

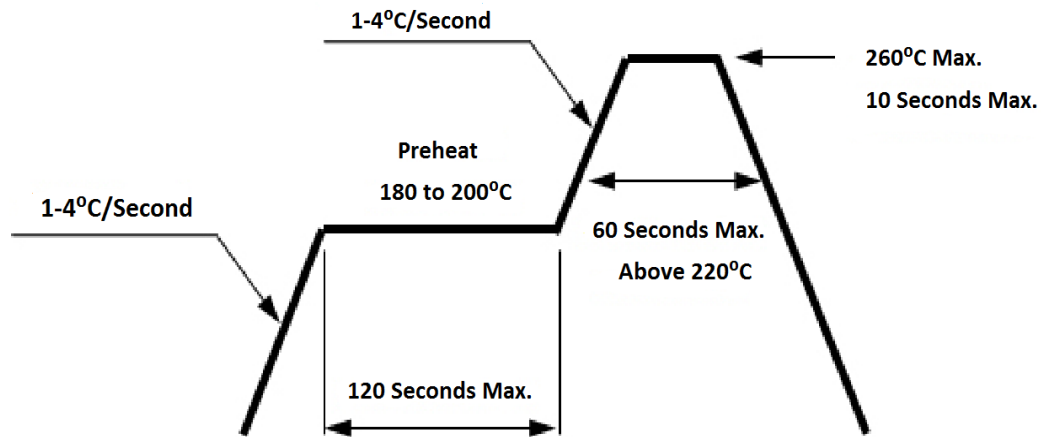

Profile Feature	Lead Free Assembly
Preheat: Temperature Range	180°C – 200°C
Preheat: Time (Maximum)	120 seconds
Peak Temperature	260°C
Soldering Time (Maximum)	10 seconds
Allowable Reflow Cycles	2

Figure 13 : Pick and Place

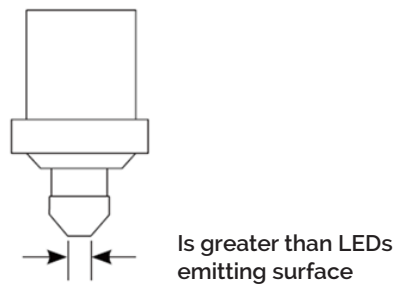


Note for Figure 13:

1. When using a pick and place machine, choose a nozzle that has a larger diameter than the LED's emitting surface. Using a Pick-and-Place nozzle with a smaller diameter than the size of the LEDs emitting surface will cause damage and may also cause the LED to not illuminate.

Packaging


Figure 14: Emitter Reel Drawings

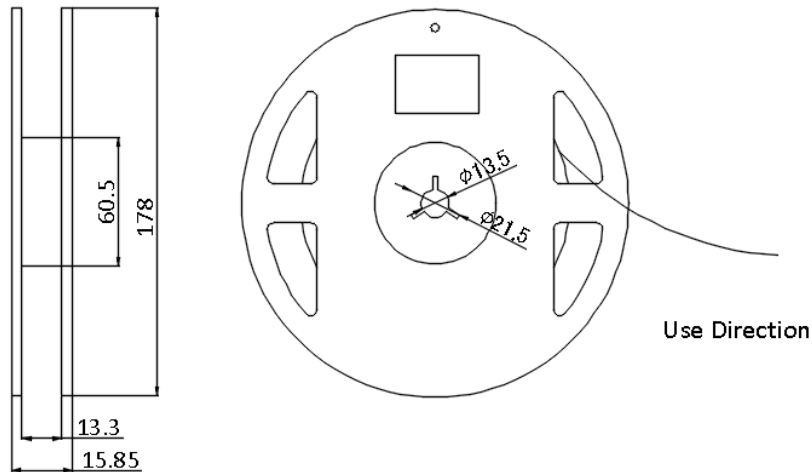

Note for Figure 14:

1. Drawings are not to scale. Drawing dimensions are in millimeters.

Figure 15: Emitter Tape Drawings

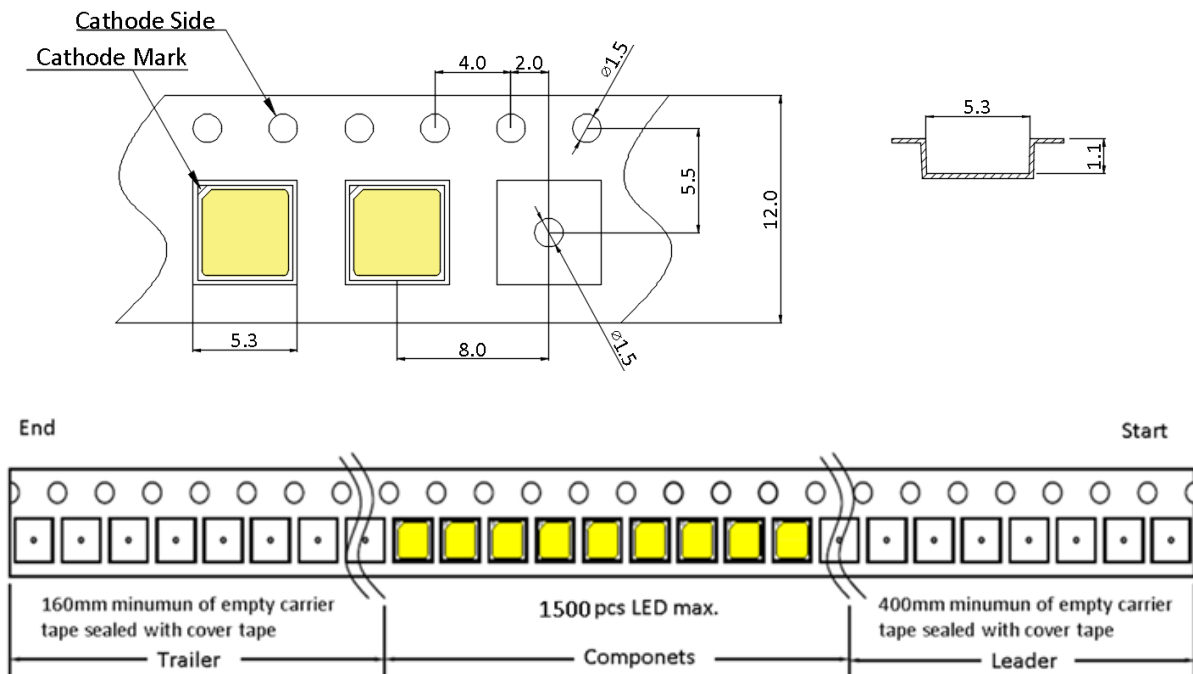


Note for Figure 15:

1. Drawings are not to scale. Drawing dimensions are in millimeters.

Packaging

Figure 16: Emitter Reel Packaging Drawings

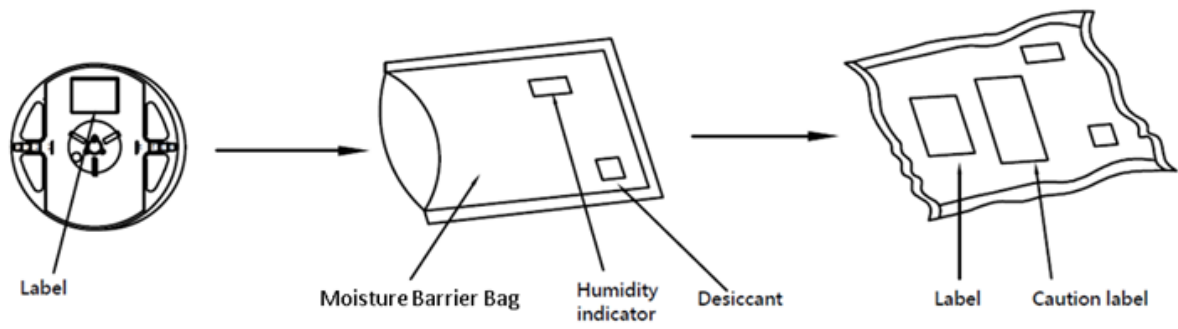

Note for Figure 16:
1. Drawings are not to scale.

Design Resources

Please contact your Bridgelux sales representative for assistance.

Precautions

CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the LED emitter. Please consult Bridgelux Application Note AN51 for additional information.

CAUTION: EYE SAFETY

Eye safety classification for the use of Bridgelux SMD LED emitter is in accordance with IEC specification EN62471: Photobiological Safety of Lamps and Lamp Systems. SMD LED emitters are classified as Risk Group 2 when operated at or below the maximum drive current. Please use appropriate precautions. It is important that employees working with LEDs are trained to use them safely.

CAUTION: RISK OF BURN

Do not touch the SMD LED emitter during operation. Allow the emitter to cool for a sufficient period of time before handling. The SMD LED emitter may reach elevated temperatures such that could burn skin when touched.

CAUTION

CONTACT WITH LIGHT EMITTING SURFACE (LES)

Avoid any contact with the LES. Do not touch the LES of the emitter or apply stress to the LES (yellow phosphor resin area). Contact may cause damage to the emitter

Optics and reflectors must not be mounted in contact with the LES (yellow phosphor resin area).

Disclaimers

MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

STANDARD TEST CONDITIONS

Unless otherwise stated, LED emitter testing is performed at the nominal drive current.

About Bridgelux: We Build Light That Transforms

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

For more information about the company, please visit
bridgelux.com
twitter.com/Bridgelux
facebook.com/Bridgelux
youtube.com/user/Bridgelux
WeChat ID: BridgeluxInChina



46430 Fremont Boulevard
Fremont, CA 94538
Tel (925) 583-8400
www.bridgelux.com

© 2020 Bridgelux, Inc. All rights reserved 2020. Product specifications are subject to change without notice. Bridgelux and the Bridgelux stylized logo design are registered trademarks of Bridgelux, Inc. All other trademarks are the property of their respective owners.