


Bridgelux® CSP 1111 Series

Product Data Sheet DS959

Introduction

CSP 1111



The Bridgelux Chip Scale Package (CSP) 1111 LED offers exceptional performance in an ultra compact size. This CSP LED is hot-color targeted which ensures that the LEDs fall within their specified color bin at the typical application conditions of 85°C. With its superior performance without bonding wires and ability to assemble a densely populated and high luminous flux LED board, the CSP 1111 provides unparalleled design-in flexibility for indoor and outdoor lighting applications. The CSP 1111 is ideal as a drop in replacement for emitters with an industry standard 1.1mm x 1.1mm footprint.

Features

- Competitive efficacy and lumen per dollar
- Industry-standard 1111 footprint, 1-sided emitter
- Excellent color maintenance
- Compatible with SMT
- Superior luminous flux at maximum current for reduced LED count
- Hot-color targeting ensures that color is within the ANSI bin at the typical application conditions of 85°C
- Enables 3- and 5-step MacAdam ellipse custom binning kits
- 120 degrees viewing angle
- Multiple CCT and CRI configurations for a wide range of lighting applications

Benefits

- Lower operating and manufacturing cost
- Ease of design and rapid go-to-market
- Uniform consistent white light
- Reliable and constant white point
- Environmentally friendly, complies with standards
- Design flexibility

Contents

Product Feature Map	2
Product Nomenclature	2
Product Test Conditions	2
Product Selection Guide	3
Performance at Commonly Used Drive Currents	5
Electrical and Thermal Characteristics	8
Absolute Maximum Ratings	9
Product Bin Definitions	10
Performance Curves	13
Typical Radiation Pattern	16
Typical Color Spectrum	17
Mechanical Dimensions	18
Reliability	19
Reflowing Characteristics	20
Packaging	21
Design Resources	23
Precautions	23
Disclaimers	23
About Bridgelux	24

Product Selection Guide

The following product configurations are available:

Table 1: Selection Guide, Pulsed Measurement Data at 150mA ($T_j=T_{sp}=25^{\circ}\text{C}$)

Part Number ^{2,6}	Nominal CCT ² (K)	CRI ^{3,5}	Nominal Drive Current (mA)	Forward Voltage ^{4,5} (V)			Typical Pulsed Flux ^{4,5} (lm)	Typical Power (W)	Typical Efficacy (lm/W)
				Min	Typical	Max			
BXCP-18G-11L-K11-3-A1-00-0-0	1800	90	150	2.70	2.88	3.20	41	0.4	94
BXCP-22G-11L-K11-3-A1-00-0-0	2200	90	150	2.70	2.88	3.20	51	0.4	117
BXCP-27G-11L-K11-3-A1-00-0-0	2700	90	150	2.70	2.88	3.20	56	0.4	130
BXCP-30G-11L-K11-3-A1-00-0-0	3000	90	150	2.70	2.88	3.20	59	0.4	136
BXCP-40G-11L-K11-3-A1-00-0-0	4000	90	150	2.70	2.88	3.20	65	0.4	150
BXCP-50G-11L-K11-3-A1-00-0-0	5000	90	150	2.70	2.88	3.20	65	0.4	150
BXCP-57G-11L-K11-3-A1-00-0-0	5700	90	150	2.70	2.88	3.20	65	0.4	150
BXCP-65G-11L-K11-3-A1-00-0-0	6500	90	150	2.70	2.88	3.20	65	0.4	150
BXCP-18H-11L-K11-3-A1-00-0-0	1800	95	150	2.70	2.88	3.20	37	0.4	87
BXCP-22H-11L-K11-3-A1-00-0-0	2200	95	150	2.70	2.88	3.20	45	0.4	104
BXCP-27H-11L-K11-3-A1-00-0-0	2700	95	150	2.70	2.88	3.20	51	0.4	117
BXCP-30H-11L-K11-3-A1-00-0-0	3000	95	150	2.70	2.88	3.20	53	0.4	122
BXCP-40H-11L-K11-3-A1-00-0-0	4000	95	150	2.70	2.88	3.20	60	0.4	139
BXCP-50H-11L-K11-3-A1-00-0-0	5000	95	150	2.70	2.88	3.20	60	0.4	139
BXCP-57H-11L-K11-3-A1-00-0-0	5700	95	150	2.70	2.88	3.20	60	0.4	139
BXCP-65H-11L-K11-3-A1-00-0-0	6500	95	150	2.70	2.88	3.20	60	0.4	139

Notes for Table 1:

- The last 6 characters (including hyphens '-') refer to nominal flux, nominal forward voltage, and color bins, respectively. "00-0-0" denotes the full distribution of flux, forward voltage, and 5 SDCM color.
Example: BXCP-27G-11L-K11-3-A1-00-0-0 refers to the full distribution of flux, forward voltage, and color within a 2700K 5-step ANSI standard chromaticity region with a minimum of 90 CRI.
- Product CCT is hot targeted at $T_{sp} = 85^{\circ}\text{C}$. Nominal CCT as defined by ANSI C78.377-2011.
- Listed CRIs are minimum values and include test tolerance.
- Products tested under pulsed condition (10ms pulse width) at nominal drive current where $T_j=T_{sp}=25^{\circ}\text{C}$.
- Bridgelux maintains a $\pm 7.5\%$ tolerance on luminous flux measurements, $\pm 0.1\text{V}$ tolerance on forward voltage measurements, and ± 2 tolerance on CRI measurements for the CSP.
- Refer to Table 6 and Table 7 for Bridgelux CSP Luminous Flux Binning and Forward Voltage Binning information.

Product Selection Guide

Table 2: Selection Guide, Pulsed Measurement Data at 150mA ($T_j = T_{sp} = 85^\circ\text{C}$)

Part Number ^{4,5}	Nominal CCT ² (K)	CRI ^{3,4}	Nominal Drive Current (mA)	Forward Voltage ⁴ (V)			Typical Pulsed Flux ⁴ (lm)	Typical Power (W)	Typical Efficacy (lm/W)
				Min	Typical	Max			
BXCP-18G-11L-K11-3-A1-00-0-0	1800	90	150	2.60	2.80	3.00	36	0.4	86
BXCP-22G-11L-K11-3-A1-00-0-0	2200	90	150	2.60	2.80	3.00	45	0.4	107
BXCP-27G-11L-K11-3-A1-00-0-0	2700	90	150	2.60	2.80	3.00	51	0.4	120
BXCP-30G-11L-K11-3-A1-00-0-0	3000	90	150	2.60	2.80	3.00	53	0.4	126
BXCP-40G-11L-K11-3-A1-00-0-0	4000	90	150	2.60	2.80	3.00	58	0.4	139
BXCP-50G-11L-K11-3-A1-00-0-0	5000	90	150	2.60	2.80	3.00	58	0.4	139
BXCP-57G-11L-K11-3-A1-00-0-0	5700	90	150	2.60	2.80	3.00	58	0.4	139
BXCP-65G-11L-K11-3-A1-00-0-0	6500	90	150	2.60	2.80	3.00	58	0.4	139
BXCP-18H-11L-K11-3-A1-00-0-0	1800	95	150	2.60	2.80	3.00	33	0.4	79
BXCP-22H-11L-K11-3-A1-00-0-0	2200	95	150	2.60	2.80	3.00	41	0.4	97
BXCP-27H-11L-K11-3-A1-00-0-0	2700	95	150	2.60	2.80	3.00	45	0.4	107
BXCP-30H-11L-K11-3-A1-00-0-0	3000	95	150	2.60	2.80	3.00	47	0.4	113
BXCP-40H-11L-K11-3-A1-00-0-0	4000	95	150	2.60	2.80	3.00	54	0.4	128
BXCP-50H-11L-K11-3-A1-00-0-0	5000	95	150	2.60	2.80	3.00	54	0.4	128
BXCP-57H-11L-K11-3-A1-00-0-0	5700	95	150	2.60	2.80	3.00	54	0.4	128
BXCP-65H-11L-K11-3-A1-00-0-0	6500	95	150	2.60	2.80	3.00	54	0.4	128

Notes for Table 2:

- The last 6 characters (including hyphens '-') refer to nominal flux, nominal forward voltage, and color bins, respectively. "00-0-0" denotes the full distribution of flux, forward voltage, and 5 SDCM color.
Example: BXCP-27G-11L-K11-3-A1-00-0-0 refers to the full distribution of flux, forward voltage, and color within a 2700K 5-step ANSI standard chromaticity region with a minimum of 90 CRI.
- Product CCT is hot targeted at $T_{sp} = 85^\circ\text{C}$. Nominal CCT as defined by ANSI C78.377-2011.
- Listed CRIs are minimum values and include test tolerance.
- Bridgelux maintains a $\pm 7.5\%$ tolerance on luminous flux measurements, $\pm 0.1\text{V}$ tolerance on forward voltage measurements, and ± 2 tolerance on CRI measurements for the CSP.
- Refer to Table 6 and Table 7 for Bridgelux CSP Luminous Flux Binning and Forward Voltage Binning information.
- Products tested under pulsed condition (10ms pulse width) at nominal drive current where $T_j = T_{sp} = 85^\circ\text{C}$.

Performance at Commonly Used Drive Currents

CSP 1111 LEDs specifications at nominal drive current are shown in Table 1 and Table 2. CSP 1111 may also be driven at other drive currents dependent on specific application design requirements. The performance at any drive current can be derived from the current vs. voltage characteristics shown in Figure 2 and the relative luminous flux vs. current characteristics shown in Figure 3. The performance at commonly used drive currents is summarized in Table 3.

Table 3: Performance at Commonly Used Drive Currents

Part Number	CRI	Drive Current ¹ (mA)	Typical V_f $T_{sp} = 25^\circ\text{C}$ (V)	Typical Power $T_{sp} = 25^\circ\text{C}$ (W)	Typical Pulsed Flux ² $T_{sp} = 25^\circ\text{C}$ (lm)	Typical Pulsed Flux ³ $T_{sp} = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_{sp} = 25^\circ\text{C}$ (lm/W)
BXCP-18G-11L-K11-3-A1-00-0-0	90	50	2.7	0.1	15	13	110
		150	2.9	0.4	41	36	94
		250	3.0	0.8	61	55	81
		350	3.1	1.1	79	72	73
		400	3.2	1.3	88	79	69
		500	3.3	1.7	103	93	63
BXCP-22G-11L-K11-3-A1-00-0-0	90	50	2.7	0.1	19	17	137
		150	2.9	0.4	51	45	117
		250	3.0	0.8	77	69	101
		350	3.1	1.1	99	89	91
		400	3.2	1.3	110	99	86
		500	3.3	1.7	129	116	78
BXCP-27G-11L-K11-3-A1-00-0-0	90	50	2.7	0.1	21	19	153
		150	2.9	0.4	56	51	130
		250	3.0	0.8	85	77	112
		350	3.1	1.1	110	99	101
		400	3.2	1.3	122	110	95
		500	3.3	1.7	144	129	87
BXCP-30G-11L-K11-3-A1-00-0-0	90	50	2.7	0.1	22	20	161
		150	2.9	0.4	59	53	136
		250	3.0	0.8	90	81	119
		350	3.1	1.1	117	105	107
		400	3.2	1.3	129	116	101
		500	3.3	1.7	152	136	92
BXCP-40G-11L-K11-3-A1-00-0-0	90	50	2.7	0.1	24	22	178
		150	2.9	0.4	65	58	151
		250	3.0	0.8	99	89	131
		350	3.1	1.1	129	116	119
		400	3.2	1.3	142	128	111
		500	3.3	1.7	168	151	101
BXCP-50G-11L-K11-3-A1-00-0-0	90	50	2.7	0.1	24	22	178
		150	2.9	0.4	65	58	151
		250	3.0	0.8	99	89	131
		350	3.1	1.1	129	116	119
		400	3.2	1.3	142	128	111
		500	3.3	1.7	168	151	101

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7.5\%$ tolerance on flux measurements.
3. Typical pulsed performance values are provided as reference only and are not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 3: Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V_f $T_{sp} = 25^\circ\text{C}$ (V)	Typical Power $T_{sp} = 25^\circ\text{C}$ (W)	Typical Pulsed Flux ² $T_{sp} = 25^\circ\text{C}$ (lm)	Typical Pulsed Flux ³ $T_{sp} = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_{sp} = 25^\circ\text{C}$ (lm/W)
BXCP-57G-11L-K11-3-A1-00-0-0	90	50	2.7	0.1	24	22	178
		150	2.9	0.4	65	58	151
		250	3.0	0.8	99	89	131
		350	3.1	1.1	129	116	119
		400	3.2	1.3	142	128	111
		500	3.3	1.7	168	151	101
BXCP-65G-11L-K11-3-A1-00-0-0	90	50	2.7	0.1	24	22	178
		150	2.9	0.4	65	58	151
		250	3.0	0.8	99	89	131
		350	3.1	1.1	129	116	119
		400	3.2	1.3	142	128	111
		500	3.3	1.7	168	151	101
BXCP-18H-11L-K11-3-A1-00-0-0	95	50	2.7	0.1	14	12	101
		150	2.9	0.4	37	33	86
		250	3.0	0.8	56	50	74
		350	3.1	1.1	73	65	67
		400	3.2	1.3	80	72	63
		500	3.3	1.7	95	85	57
BXCP-22H-11L-K11-3-A1-00-0-0	95	50	2.7	0.1	17	15	124
		150	2.9	0.4	45	41	105
		250	3.0	0.8	69	62	91
		350	3.1	1.1	89	80	82
		400	3.2	1.3	99	89	77
		500	3.3	1.7	116	105	70
BXCP-27H-11L-K11-3-A1-00-0-0	95	50	2.7	0.1	19	17	137
		150	2.9	0.4	51	45	117
		250	3.0	0.8	77	69	101
		350	3.1	1.1	99	89	91
		400	3.2	1.3	110	99	86
		500	3.3	1.7	129	116	78
BXCP-30H-11L-K11-3-A1-00-0-0	95	50	2.7	0.1	20	18	144
		150	2.9	0.4	53	47	122
		250	3.0	0.8	80	72	106
		350	3.1	1.1	103	94	95
		400	3.2	1.3	115	104	90
		500	3.3	1.7	136	122	82

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7.5\%$ tolerance on flux measurements.
3. Typical pulsed performance values are provided as reference only and are not a guarantee of performance.

Performance at Commonly Used Drive Currents

Table 3: Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current ¹ (mA)	Typical V_f $T_{sp} = 25^\circ\text{C}$ (V)	Typical Power $T_{sp} = 25^\circ\text{C}$ (W)	Typical Pulsed Flux ² $T_{sp} = 25^\circ\text{C}$ (lm)	Typical Pulsed Flux ³ $T_{sp} = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_{sp} = 25^\circ\text{C}$ (lm/W)
BXCP-40H-11L-K11-3-A1-00-0-0	95	50	2.7	0.1	22	20	165
		150	2.9	0.4	60	54	139
		250	3.0	0.8	92	82	121
		350	3.1	1.1	119	107	109
		400	3.2	1.3	131	118	103
		500	3.3	1.7	155	139	94
BXCP-50H-11L-K11-3-A1-00-0-0	95	50	2.7	0.1	22	20	165
		150	2.9	0.4	60	54	139
		250	3.0	0.8	92	82	121
		350	3.1	1.1	119	107	109
		400	3.2	1.3	131	118	103
		500	3.3	1.7	155	139	94
BXCP-57H-11L-K11-3-A1-00-0-0	95	50	2.7	0.1	22	20	165
		150	2.9	0.4	60	54	139
		250	3.0	0.8	92	82	121
		350	3.1	1.1	119	107	109
		400	3.2	1.3	131	118	103
		500	3.3	1.7	155	139	94
BXCP-65H-11L-K11-3-A1-00-0-0	95	50	2.7	0.1	22	20	165
		150	2.9	0.4	60	54	139
		250	3.0	0.8	92	82	121
		350	3.1	1.1	119	107	109
		400	3.2	1.3	131	118	103
		500	3.3	1.7	155	139	94

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a $\pm 7.5\%$ tolerance on flux measurements.
3. Typical pulsed performance values are provided as reference only and are not a guarantee of performance.

Electrical and Thermal Characteristics

Table 4: Electrical and Thermal Characteristics

Part Number ¹	Drive Current (mA)	Forward Voltage ^{2,3} (V)			Typical Temperature Coefficient of Forward Voltage ⁴ $\Delta V_f / \Delta T$ (mV/°C)	Typical Thermal Resistance Junction to Solder Point ^{5,6} R_{j-sp} (°C/W)
		Minimum	Typical	Maximum		
BXCP-XXX-11L-K11-3-A1-00-0-0	350	2.80	3.00	3.20	-17	95

Notes for Table 4:

1. The last 6 characters (including hyphens '-') refer to nominal flux, nominal forward voltage, and color bins, respectively. "00-0-0" denotes the full distribution of flux, forward voltage, and 5 SDCM color.

Example: BXCP-27G-11L-K11-3-A1-00-0-0 refers to the full distribution of flux, forward voltage, and color within a 2700K 5-step ANSI standard chromaticity region with a minimum of 90 CRI.

2. Products tested under pulsed condition (10ms pulse width) where $T_{sp} = 85^\circ\text{C}$.

3. Bridgelux maintains a tolerance of $\pm 0.1\text{V}$ on forward voltage measurements.

4. Products measured between 25°C and 105°C under pulsed condition (10ms pulse width).

5. Thermal Resistance values based on 2700K 90 CRI product.

6. Thermal resistance value was calculated using total electrical input power; optical power was not subtracted from input power.

Absolute Maximum Ratings

Table 5: Maximum Ratings

Parameter	Maximum Rating
LED Junction Temperature (T_j)	135°C
Storage Temperature	-40°C to +125°C
Operating Solder Point Temperature (T_{sp})	-40°C to +105°C
Soldering Temperature	260°C or lower for a maximum of 10 seconds
Maximum Drive Current ¹	500mA
Maximum Peak Pulsed Forward Current ²	1000mA
Maximum Reverse Voltage ³	-5V
Moisture Sensitivity Rating	MSL 3
Electrostatic Discharge	2kV HBM. JEDEC-JS-001-HBM and JEDEC-JS-001-2012

Notes for Table 5:

1. The maximum drive current is limited depending on the solder point temperature. Refer to Figure 7.
2. Bridgelux recommends a maximum duty cycle of 10% and pulse width of 10 ms when operating CSP LED at maximum peak pulsed current specified. Maximum peak pulsed currents indicate values where CSP LED can be driven without catastrophic failures.
3. Light emitting diodes are not designed to be driven in reverse voltage and will not produce light under this condition. Maximum rating provided for reference only.

Product Bin Definitions

Table 6 lists the standard photometric luminous flux bins for Bridgelux CSP 1111 LEDs. Although several bins are outlined, product availability in a particular bin varies by production run and by product performance. Not all bins are available in all CCTs.

Table 6: Luminous Flux Bin Definitions at 350mA, $T_{sp}=85^{\circ}\text{C}$

Bin Code	Minimum	Maximum	Unit	Condition
D1	60	70	lm	$I_F=350\text{mA}$
E1	70	80		
F1	80	90		
G1	90	100		
H1	100	110		
I1	110	120		
J1	120	130		
K1	130	140		

Note for Table 6:

1. Bridgelux maintains a tolerance of $\pm 7.5\%$ on luminous flux measurements.

Table 7: Forward Voltage Bin Definition at 350mA, $T_{sp}=85^{\circ}\text{C}$

Bin Code	Minimum	Maximum	Unit	Condition
D	2.8	3.0	V	$I_F=350\text{mA}$
E	3.0	3.2		
F	3.2	3.4		

Note for Table 7:

1. Bridgelux maintains a tolerance of $\pm 0.1\text{V}$ on forward voltage measurements.

Product Bin Definitions

Table 8: 3- and 5-step MacAdam Ellipse Color Bin Definitions ($T_{sp}=85^{\circ}\text{C}$)



Table 8: 3- and 5-step MacAdam Ellipse Color Bin Definitions ($T_{sp}=85^{\circ}\text{C}$)							
CCT	Color Space	Center Point		Major Axis	minor Axis	ψ (angle)	Color Bin
		x	y				
1800K	3	0.5496	0.4082	0.00698	0.00393	40.000	3
	5			0.01164	0.00655		5(E/F/G/H)
2000K	3	0.5251	0.4120	0.00723	0.00399	51.000	3
	5			0.01205	0.00665		5(E/F/G/H)
2200K	3	0.5056	0.4152	0.00723	0.00399	51.918	3
	5			0.01205	0.00665		5(E/F/G/H)
2700K	3	0.4578	0.4101	0.00810	0.00420	53.700	3
	5			0.01350	0.00700		5(E/F/G/H)
3000K	3	0.4338	0.4030	0.00834	0.00408	53.220	3
	5			0.01390	0.00680		5(E/F/G/H)
3500K	3	0.4073	0.3917	0.00927	0.00414	54.000	3
	5			0.01545	0.00690		5(E/F/G/H)
4000K	3	0.3818	0.3797	0.00939	0.00402	53.720	3
	5			0.01565	0.00670		5(E/F/G/H)
5000K	3	0.3447	0.3553	0.00822	0.00354	59.620	3
	5			0.01370	0.00590		5(E/F/G/H)
5700K	3	0.3287	0.3417	0.00746	0.00320	59.090	3
	5			0.01243	0.00533		5(E/F/G/H)
6500K	3	0.3123	0.3282	0.00669	0.00285	58.570	3
	5			0.01115	0.00475		5(E/F/G/H)

Note for Table 8:

1. Bridgelux maintains a tolerance of ± 0.007 on x and y color coordinates in the CIE 1931 color space.
2. MacAdam Ellipse Color bin code for $\text{CRI} \geq 90$: 3(3 SDCM)/ EFGH(5 SDCM).
3. MacAdam Ellipse Color bin code for $\text{CRI} < 90$: 3(3 SDCM)/ 5(5 SDCM).

Product Bin Definitions

Figure 1: C.I.E. 1931 Chromaticity Diagram (Color Bin Structure, $T_{sp}=85^{\circ}\text{C}$)

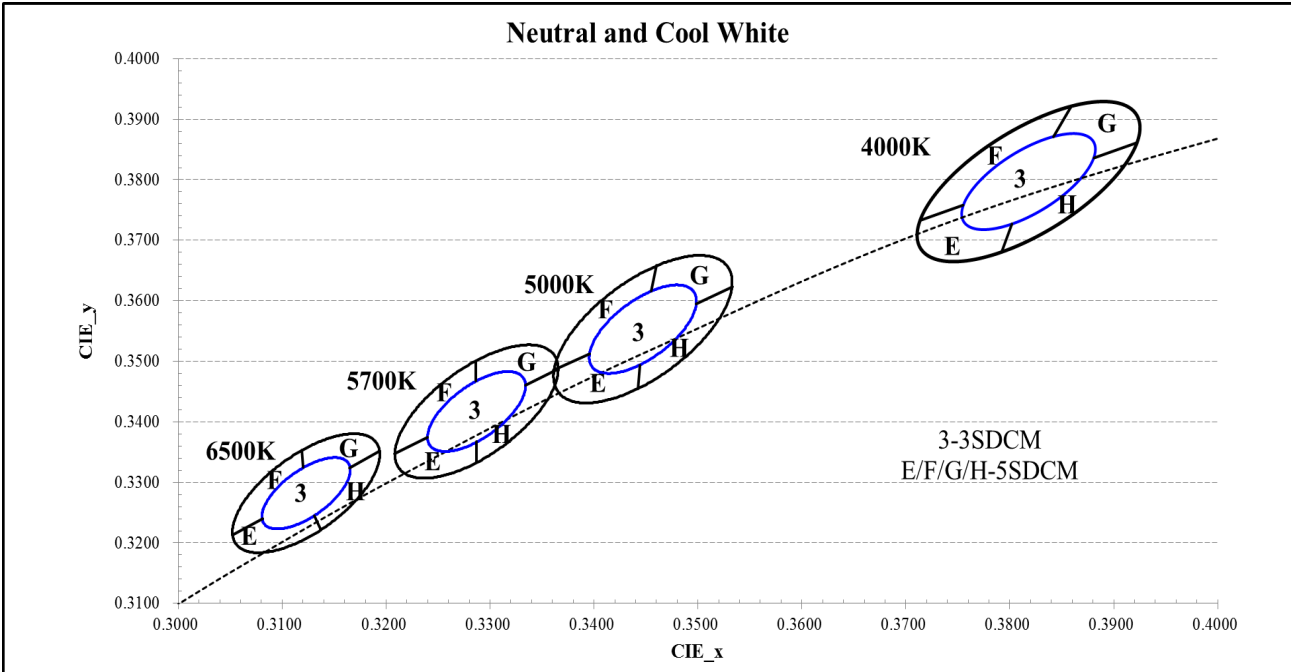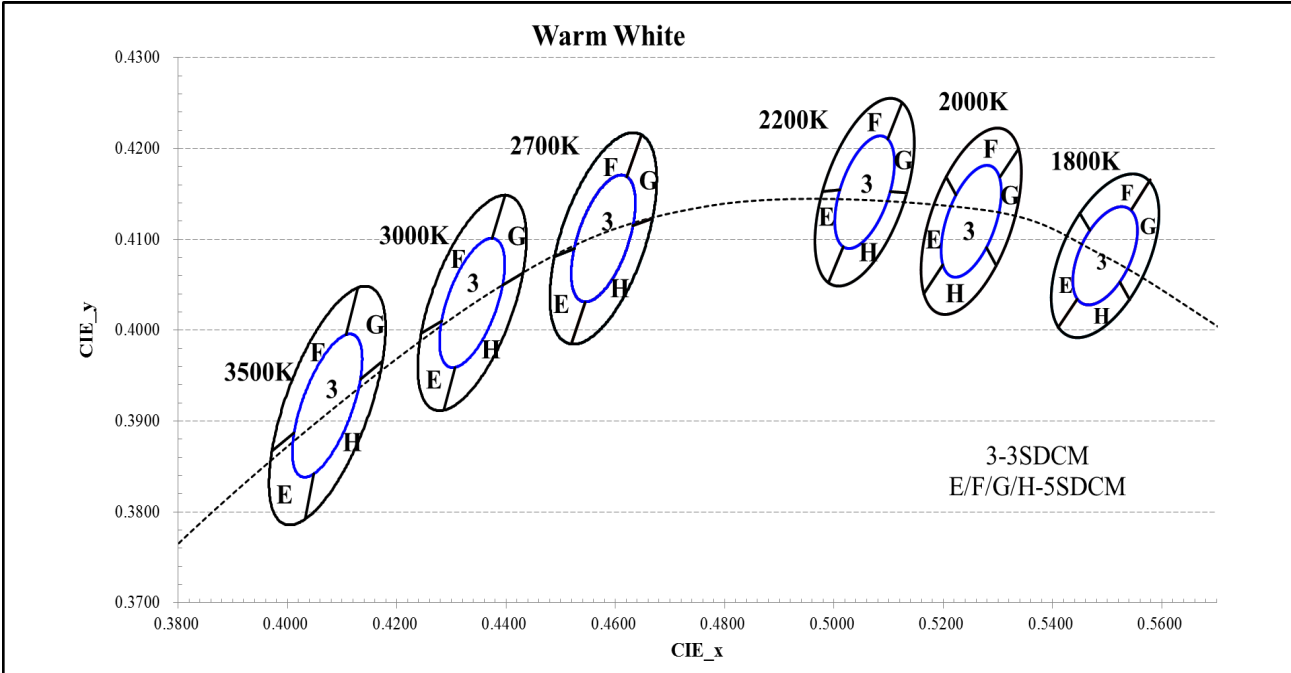

Performance Curves

Figure 2: Drive Current vs. Voltage ($T_{sp}=85^{\circ}C$)


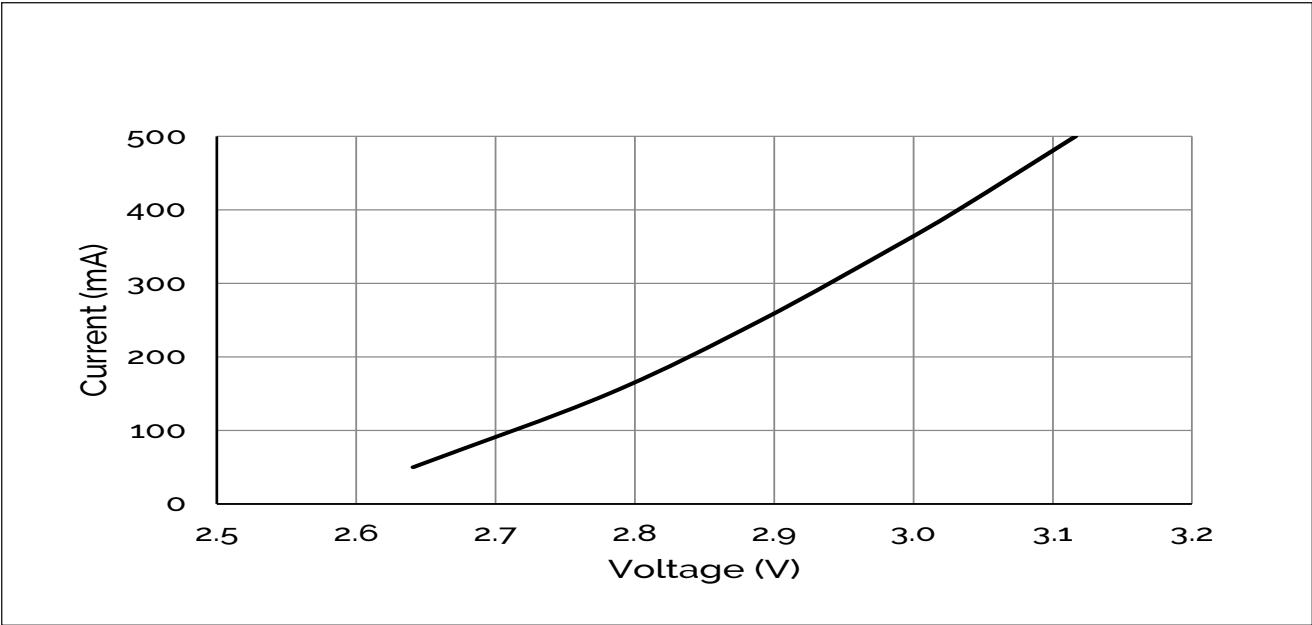


Figure 3: Typical Relative Luminous Flux vs. Drive Current ($T_{sp}=85^{\circ}C$)

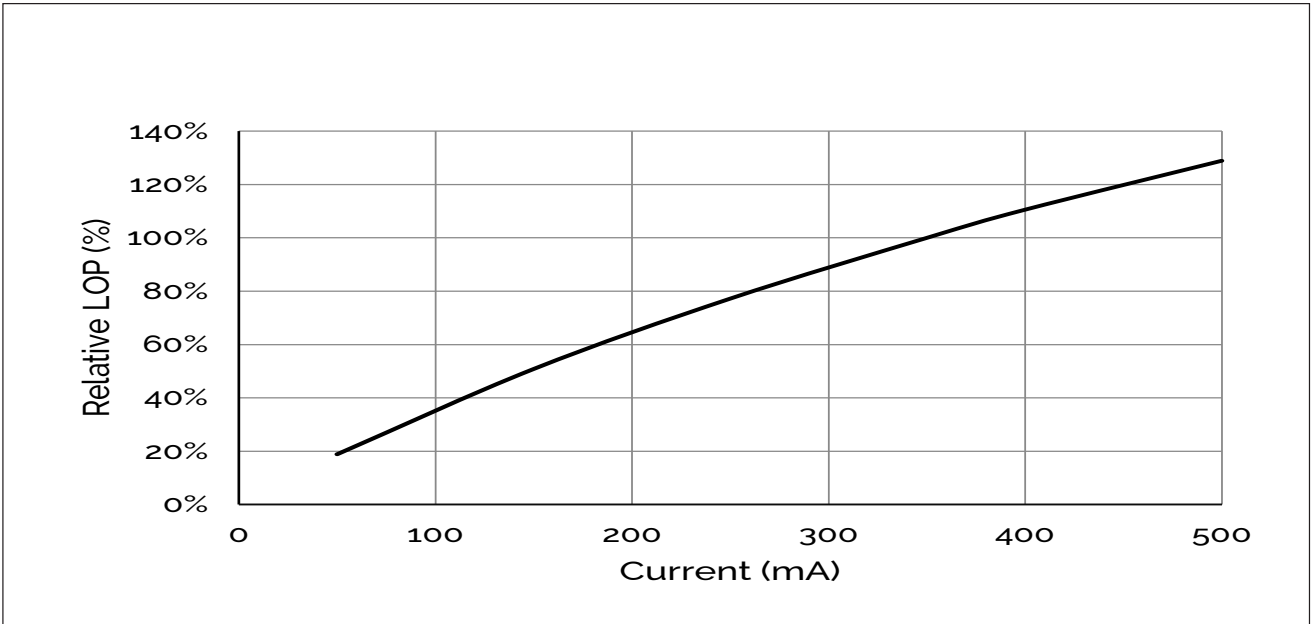

Note for Figure 3:

- 1. Bridgelux does not recommend driving low power LEDs at low current (< 10mA). Doing so may produce unpredictable results. Pulse width modulation (PWM) is recommended for dimming effects.

Performance Curves

Figure 4: Typical Relative Flux vs. Solder Point Temperature_350mA


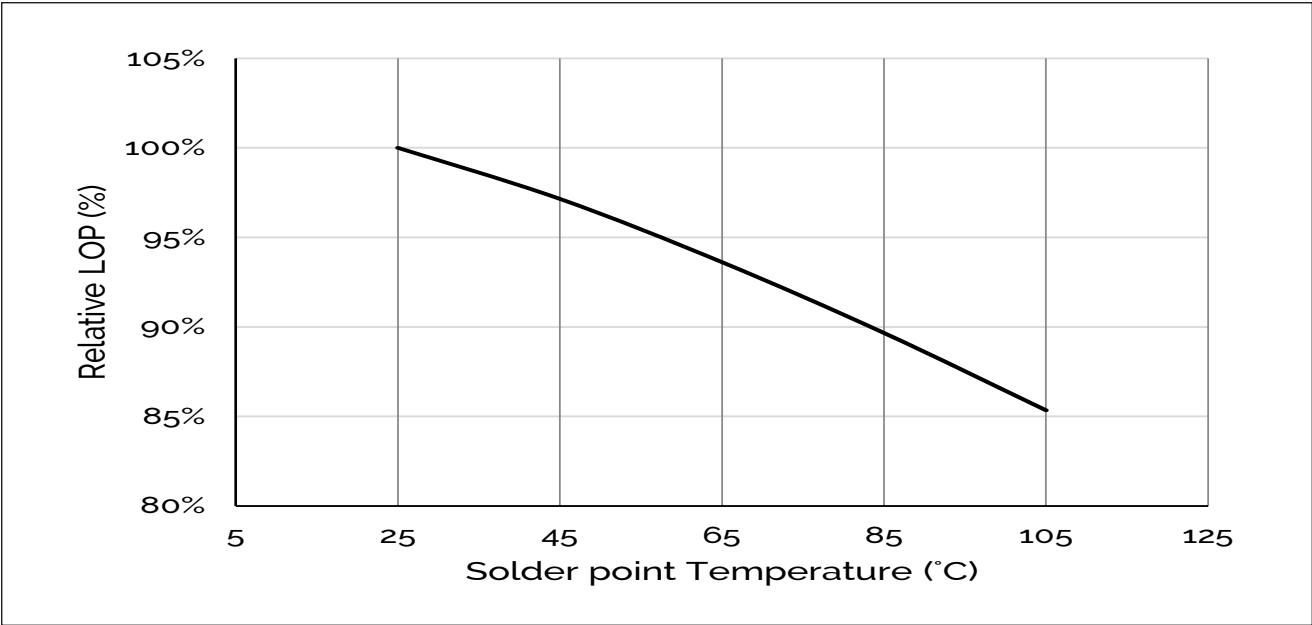



Figure 5: Typical ccY Shift vs. Solder Point Temperature_350mA

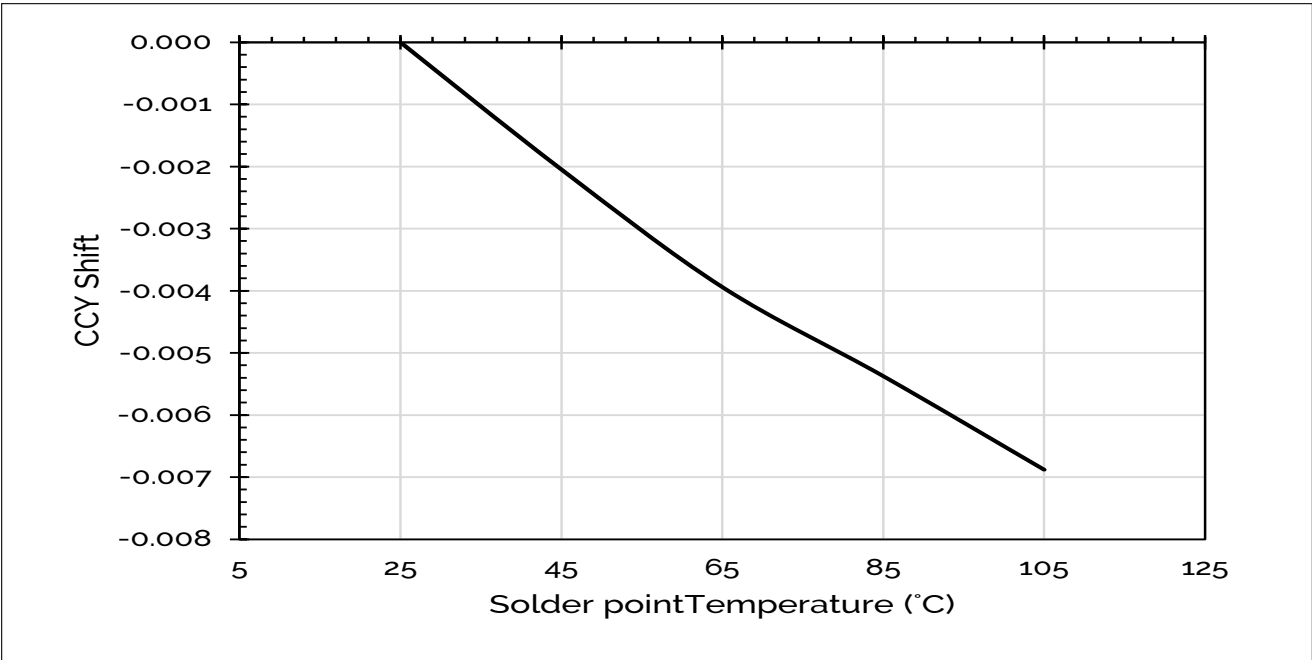

Notes for Figures 4 & 5:
1.Characteristics shown for warm white based on 2700K and 90 CRI.
2. For other color SKUs, the shift in color will vary. Please contact your Bridgelux Sales Representative for more information.

Performance Curves


Figure 6: Typical ccx Shift vs. Solder Point Temperature_350mA

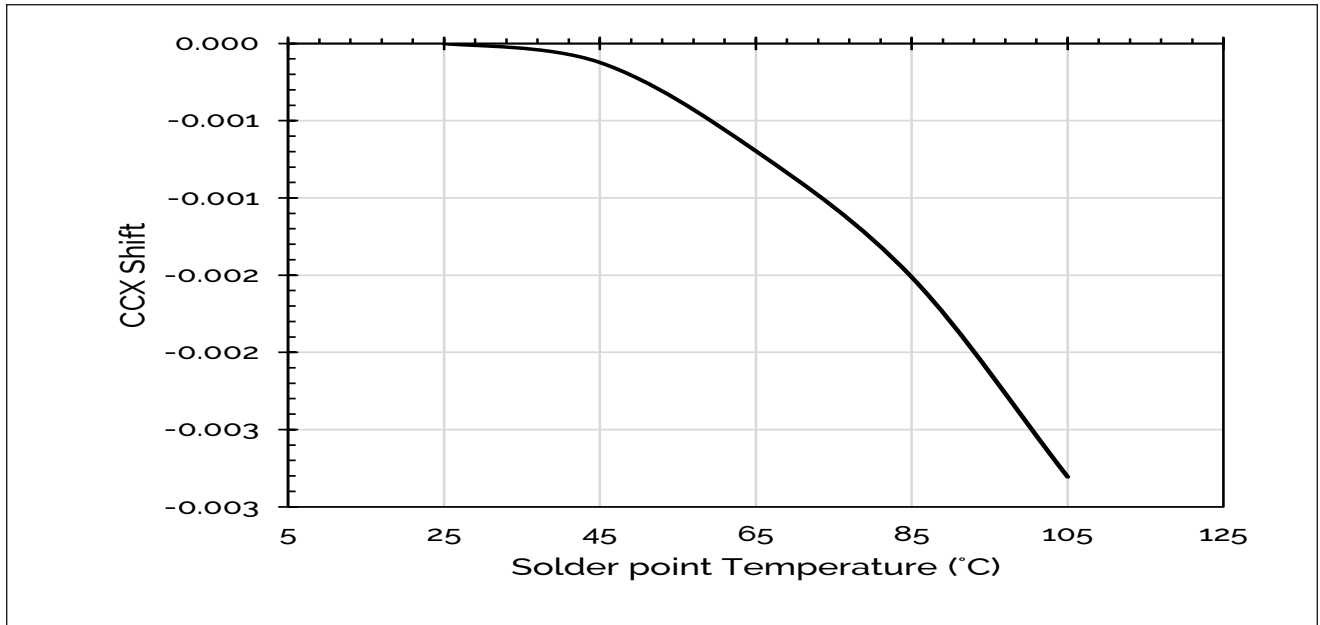

Notes for Figure 6:


1. Characteristics shown for warm white based on 2700K and 90 CRI.
2. For other color SKUs, the shift in color will vary. Please contact your Bridgelux Sales Representative for more information.

Figure 7: Drive Current vs Solder Point Temperature

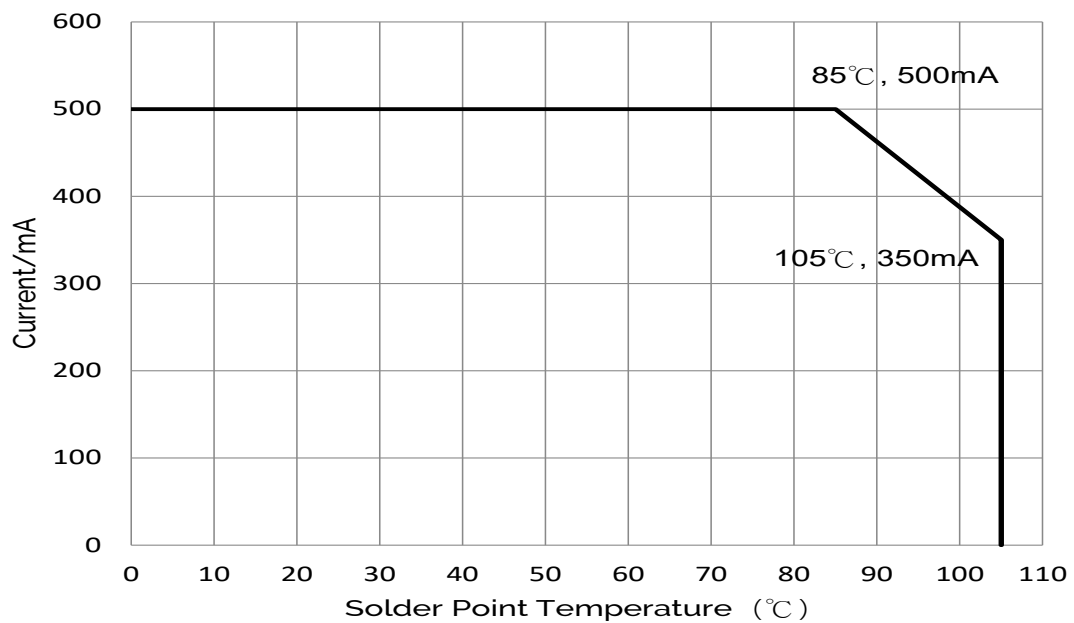

Typical Radiation Pattern


Figure 8: Typical Spatial Radiation Pattern at 350mA, $T_{sp} = 25^{\circ}\text{C}$

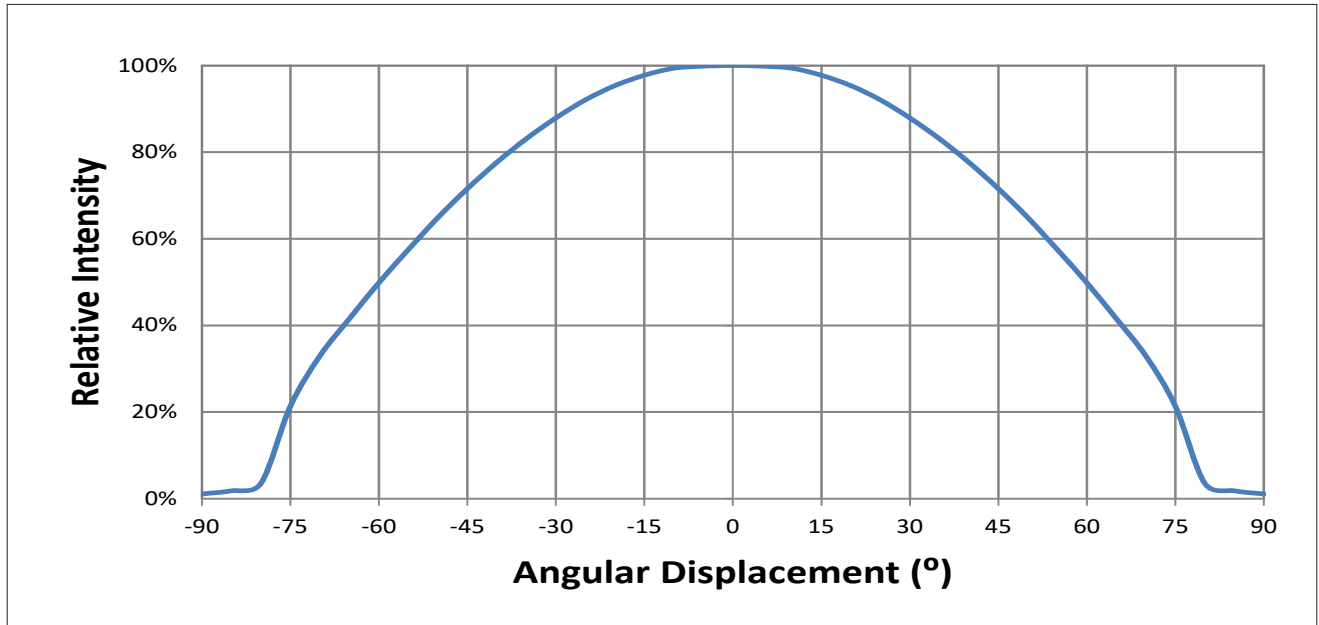

Notes for Figure 8:


1. Typical viewing angle is 120° .
2. The viewing angle is defined as the off axis angle from the centerline where I_v is $\frac{1}{2}$ of the peak value.

Figure 9: Typical Polar Radiation Pattern at 350mA, $T_{sp} = 25^{\circ}\text{C}$

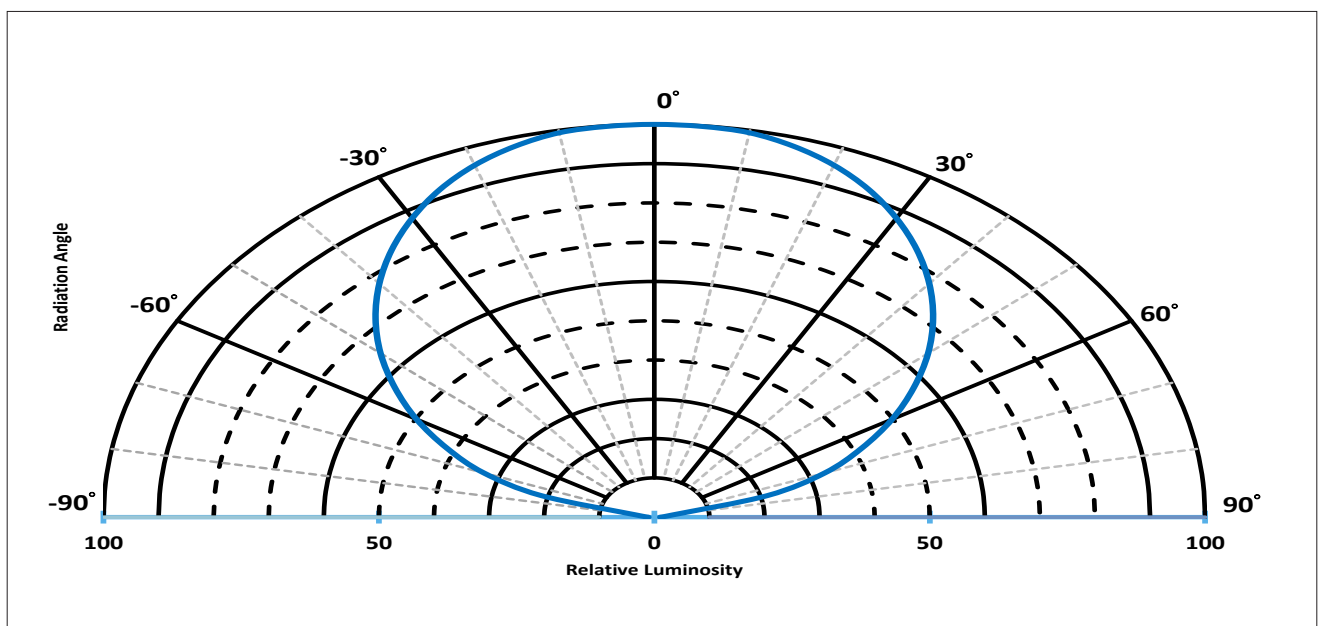

Typical Color Spectrum

Figure 10: Typical Color Spectrum at 350mA, Tsp=85°C

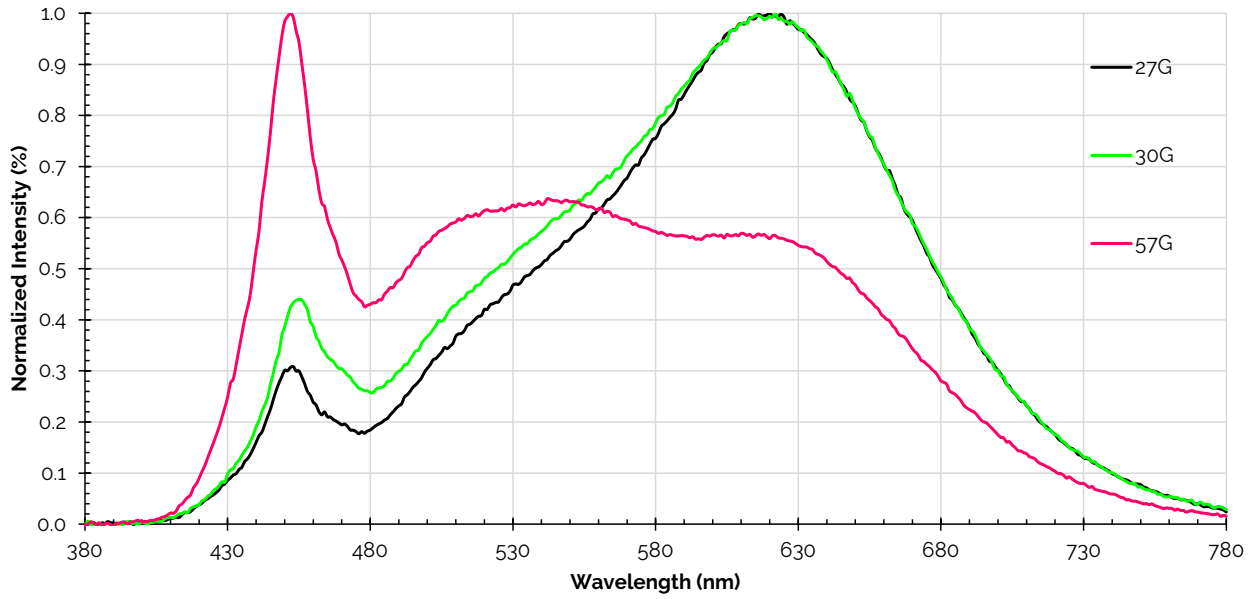


Notes for Figure 10:

1. Color spectra shown for warm white is 2700K and 90 CRI.
2. Color spectra shown for warm white is 3000K and 90 CRI.
3. Color spectra shown for cool white is 5700K and 90 CRI.

Mechanical Dimensions


Figure 11: Drawing for CSP 1111

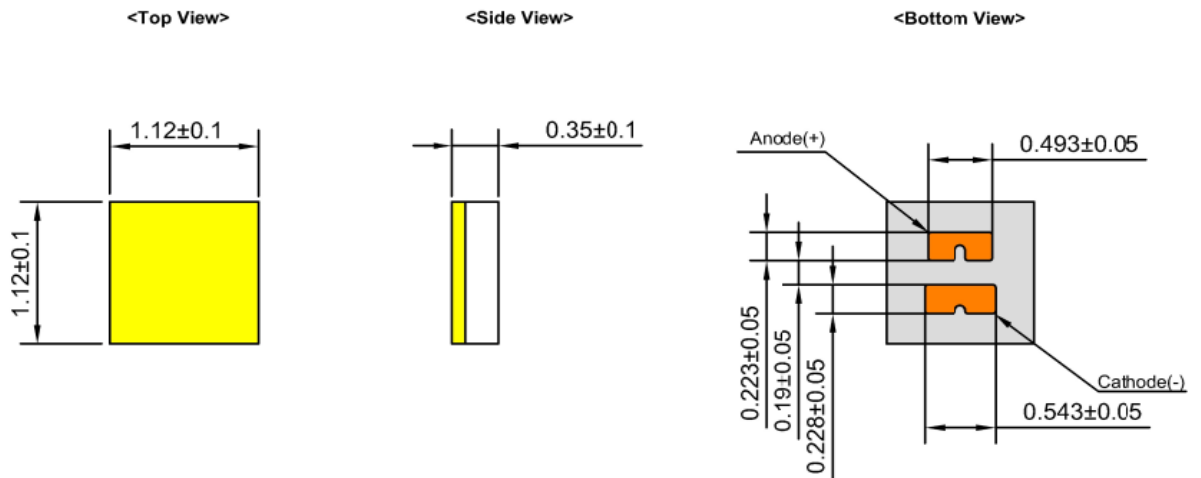

Notes for Figure 11:

1. Drawings are not to scale.
2. Drawing dimensions are in millimeters.
3. Unless otherwise specified, tolerances are ± 0.10 mm.
4. The optical center of the LED emitter is nominally defined by the mechanical center of the emitter. The light emitting surface (LES) is centered on the mechanical center of the LED emitter to a tolerance of ± 0.2 mm

Recommended PCB Soldering Pad Pattern

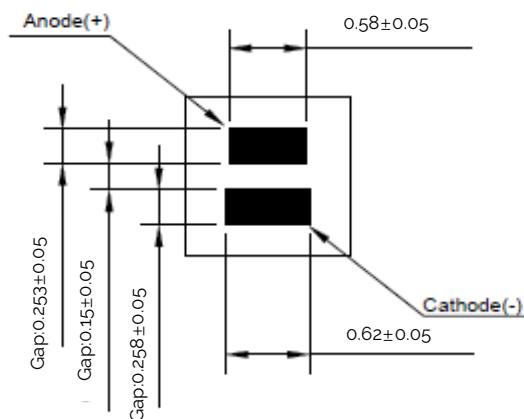

Reliability

Table 9: Reliability Test Items and Conditions

No .	Items	Reference Standard	Test Conditions	Drive Current	Test Duration	Units Failed/Tested
1	Moisture Sensitivity Level	J-STD-020E	$T_{\text{slid}} = 260^{\circ}\text{C}$, 10sec, Precondition: 85°C , 60%RH, 168hr		3 reflows	0/22
2	Low Temperature Storage	JESD22-A119	$T_{\text{a}} = -40^{\circ}\text{C}$		1000 hours	0/22
3	High Temperature Storage	JESD22-A103D	$T_{\text{a}} = 125^{\circ}\text{C}$		1000 hours	0/22
4	Low Temperature Operating Life	JESD22-A108D	$T_{\text{a}} = -40^{\circ}\text{C}$	500mA	1000 hours	0/22
5	Temperature Humidity Operating Life	JESD22-A101C	$T_{\text{sp}} = 85^{\circ}\text{C}$, RH=85%	500mA	1000 hours	0/22
6	High Temperature Operating Life	JESD22-A108D	$T_{\text{sp}} = 85^{\circ}\text{C}$	500mA	1000 hours	0/22
7	Power Switching	IEC62717	$T_{\text{sp}} = 85^{\circ}\text{C}$, ON 30s OFF 30s	500mA	30000 Cycle	0/22
8	Thermal Shock	JESD22-A106B	$T_{\text{a}} = -40^{\circ}\text{C} \sim 125^{\circ}\text{C}$; Dwell : 15min; Transfer: 10sec		200 Cycle	0/22
9	Temperature Cycle	JESD22-A104E	$T_{\text{a}} = -40^{\circ}\text{C} \sim 125^{\circ}\text{C}$; Dwell at extreme temperature: 15min; Ramp rate < $105^{\circ}\text{C}/\text{min}$		200 Cycle	0/22
10	Electrostatic Discharge	JS-001-2012	HBM, 2KV, 15k Ω 100pF, Alternately positive or negative			0/22
11	Vibration Test	JESD22-B103	10m/s ² , 100-20000-100Hz 4 cycles,4min,eachX,Y,Z		4 Cycles	0/22

Passing Criteria


Item	Symbol	Test Condition	Passing Criteria
Forward Voltage	Vf	500mA	$\Delta V_f < 10\%$
Luminous Flux	Iv	500mA	$\Delta I_v < 30\%$
Chromaticity Coordinates	(x, y)	500mA	$\Delta u'v' < 0.007$

Notes for Table 9:

1. Test board: Aluminum board thickness -1.0mm, Copper layer thickness-70um.
2. Measurements are performed after allowing the LEDs to return to room temperature
3. T_{slid} : reflow soldering temperature; T_{a} : ambient temperature

Reflowing Characteristics


Figure 12 : Reflow Profile

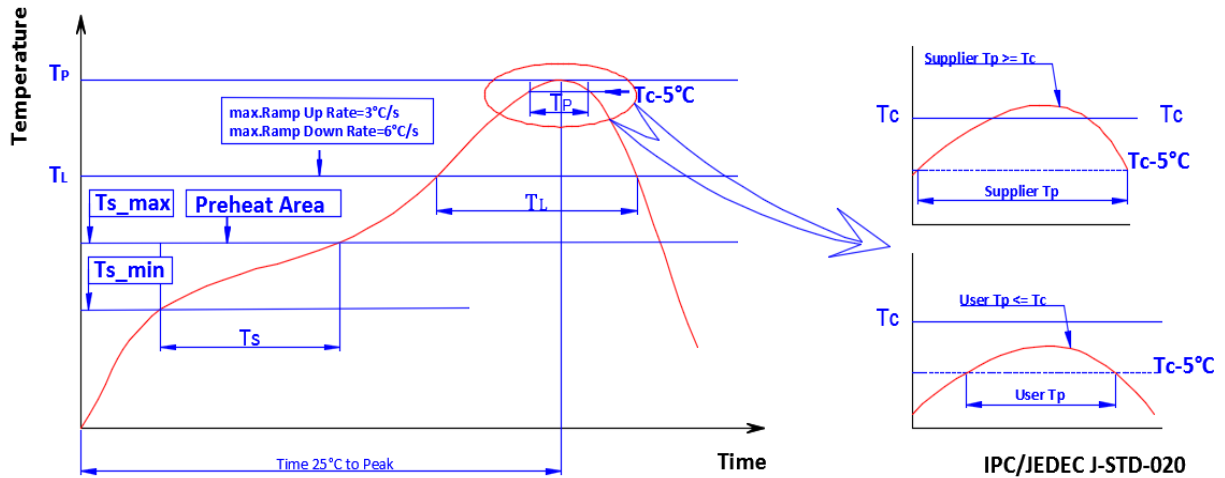

Profile Parameters	Lead-Free Solder SAC305
Average Ramp-Up Rate (T_s_{max} to T_p)	3°C/second max.
Preheat: Temperature Min (T_s_{min})	150°C
Preheat: Temperature Max (T_s_{max})	190°C
Preheat: Time (t_s_{min} to t_s_{max})	90-120 seconds
Liquidous Temperature (T_L)	217°C
Time Maintained Above Liquidous Temperature (T_L): Time (t_L)	60-90 seconds
Peak/Classification Temperature (T_p)	250-255°C
Time Within 10°C of Actual Peak Temperature (T_p)	20-40 seconds
Ramp-Down Rate	6°C/second max
Time 25°C to Peak Temperature	8 minutes max.

Packaging


Figure 13: Reel Drawings

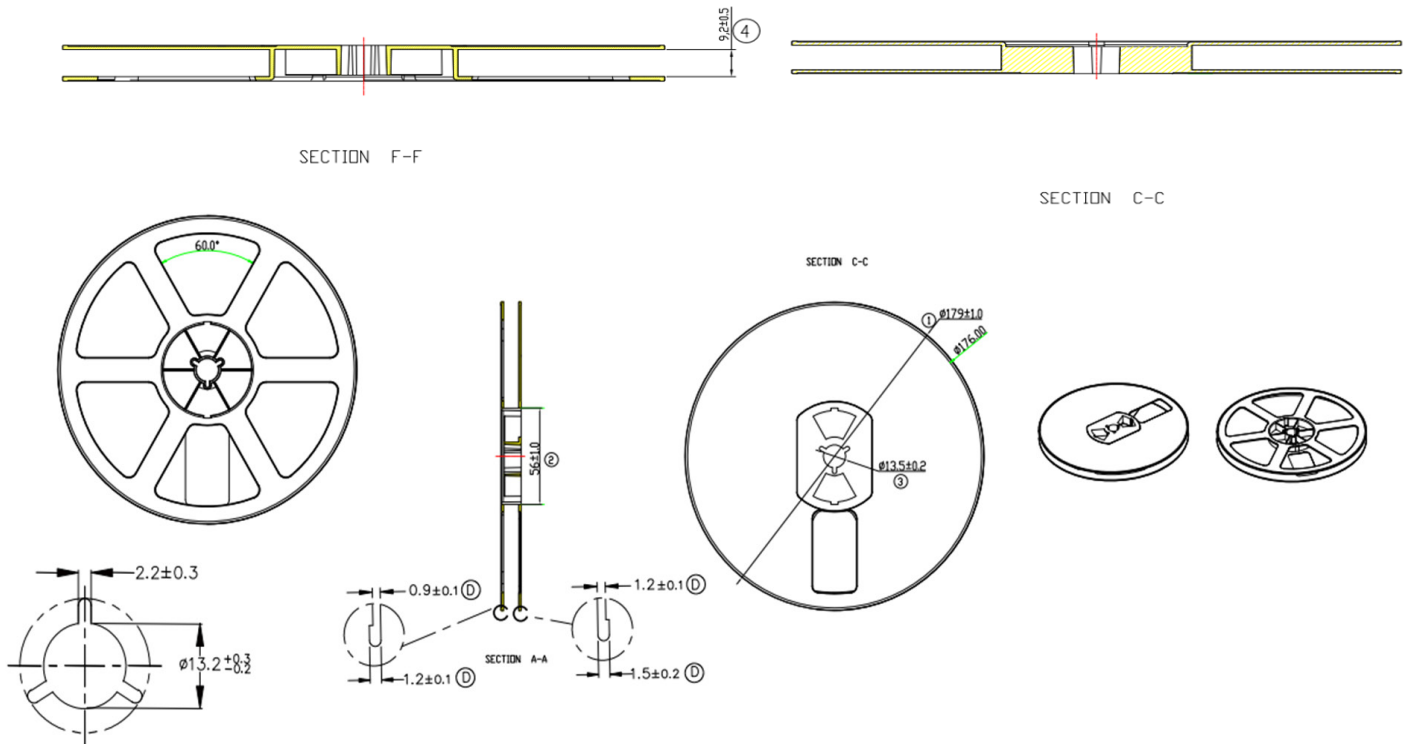

Note for Figure 13:

1. Drawings are not to scale. Drawing dimensions are in millimeters.

Figure 14: Tape Drawings

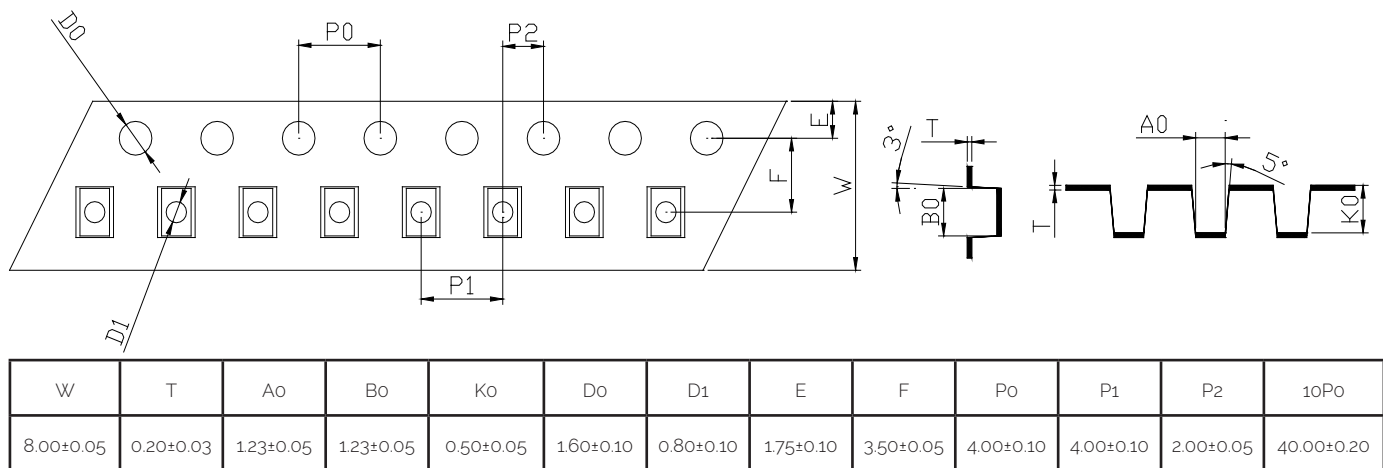


Note for Figure 14:

1. Drawings are not to scale. Drawing dimensions are in millimeters.

Packaging

Figure 15: Reel Packaging Drawings

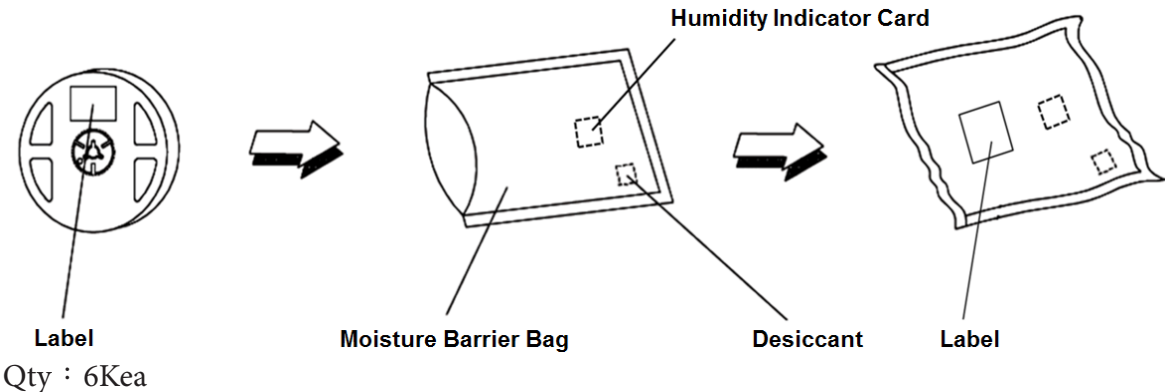

Note for Figure 15:
1. Drawings are not to scale.

Design Resources

Optical Source Models

Please contact your Bridgelux sales representative for assistance.

Precautions

CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the CSP.

CAUTION: EYE SAFETY

Eye safety classification for the use of Bridgelux CSP is in accordance with IEC specification 62471: Photobiological Safety of Lamps and Lamp Systems. Most Bridgelux CSPs are classified as Risk Group Exempt or Risk Group 1 in accordance with IEC specification 62471. However, the CSP LEDs will be classified as Risk Group 2 when operated at high power conditions with high ratio blue wavelength in the emission spectrum depending on characteristics. Please use appropriate precautions. It is important that employees working with LEDs are trained to use them safely.




CAUTION: RISK OF BURN

Do not touch the CSP LES during operation. Allow the CSP to cool for a sufficient period of time before handling. The CSP may reach elevated temperatures such that could burn skin when touched.

CAUTION: PICK AND PLACE

Recommend using Teflon material for nozzle. Sharp steel material must not be used as pick up tools.

CAUTION



Disclaimers

MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

STANDARD TEST CONDITIONS

Unless otherwise stated, LED emitter testing is performed at the nominal drive current.

About Bridgelux: Bridging Light and Life™

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

For more information about the company, please visit
bridgelux.com
twitter.com/Bridgelux
facebook.com/Bridgelux
WeChat ID: BridgeluxInChina



46410 Fremont Boulevard
Fremont, CA 94538 U.S.A.
Tel (925) 583-8400
www.bridgelux.com

© 2022 Bridgelux, Inc. All rights reserved. Product specifications are subject to change without notice. Bridgelux and the Bridgelux stylized logo design are registered trademarks of Bridgelux, Inc. All other trademarks are the property of their respective owners.

Bridgelux CSP 1111 Product Data Sheet DS959 Rev.B (09/2024)