


# Bridgelux® CSP 1919 Series

Product Data Sheet DS961

# Introduction

CSP 1919

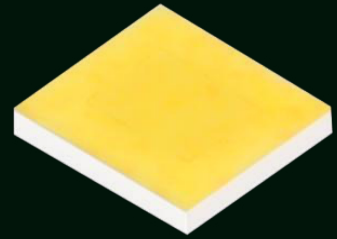

The Bridgelux Chip Scale Package (CSP) 1919 LED offers exceptional performance in an ultra compact size. This CSP LED is hot-color targeted which ensures that the LEDs fall within their specified color bin at the typical application conditions of 85°C. With its superior performance without bonding wires and ability to assemble a densely populated and high luminous flux LED board, the CSP 1919 provides unparalleled design-in flexibility for indoor and outdoor lighting applications. The CSP 1919 is ideal as a drop in replacement for emitters with an industry standard 1.8mm x 1.8mm footprint.

## Features

- Competitive efficacy and lumen per dollar
- Industry-standard 1919 footprint, 1-sided emitter
- Excellent color maintenance
- Compatible with SMT
- Superior luminous flux at maximum current for reduced LED count
- Hot-color targeting ensures that color is within the ANSI bin at the typical application conditions of 85°C
- Enables 3- and 5-step MacAdam ellipse custom binning kits
- 120 degrees viewing angle
- Multiple CCT and CRI configurations for a wide range of lighting applications

## Benefits

- Lower operating and manufacturing cost
- Ease of design and rapid go-to-market
- Uniform consistent white light
- Reliable and constant white point
- Environmentally friendly, complies with standards
- Design flexibility


# Contents

Product Feature Map	2
Product Nomenclature	2
Product Test Conditions	2
Product Selection Guide	3
Performance at Commonly Used Drive Currents	5
Electrical and Thermal Characteristics	10
Absolute Maximum Ratings	11
Product Bin Definitions	12
Performance Curves	15
Typical Radiation Pattern	18
Typical Color Spectrum	19
Mechanical Dimensions	20
Reliability	21
Reflowing Characteristics	22
Packaging	23
Design Resources	25
Precautions	25
Disclaimers	25
About Bridgelux	26

# Product Feature Map


Bridgelux CSP LED products offer exceptional performance and color quality all in a highly reliable, cost effective, compact package. Our CSP products come in industry standard package sizes and follow ANSI binning standards.

These LEDs are optimized for cost and performance, helping to ensure highly competitive system lumen per dollar performance while addressing the stringent efficacy and reliability standards required for modern lighting applications.

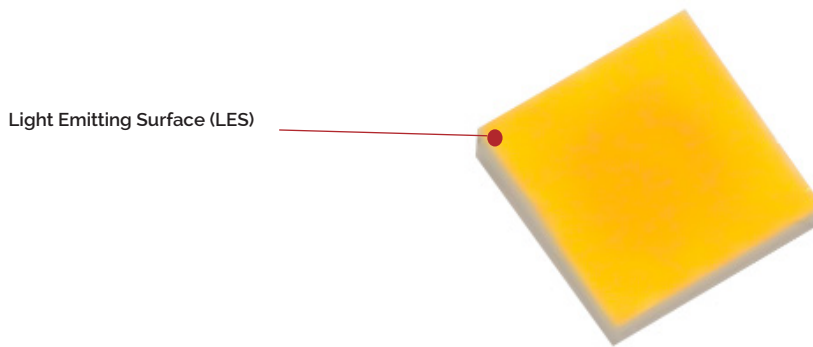

## Product Nomenclature

The part number designation for Bridgelux CSP 1919 is explained as follows:

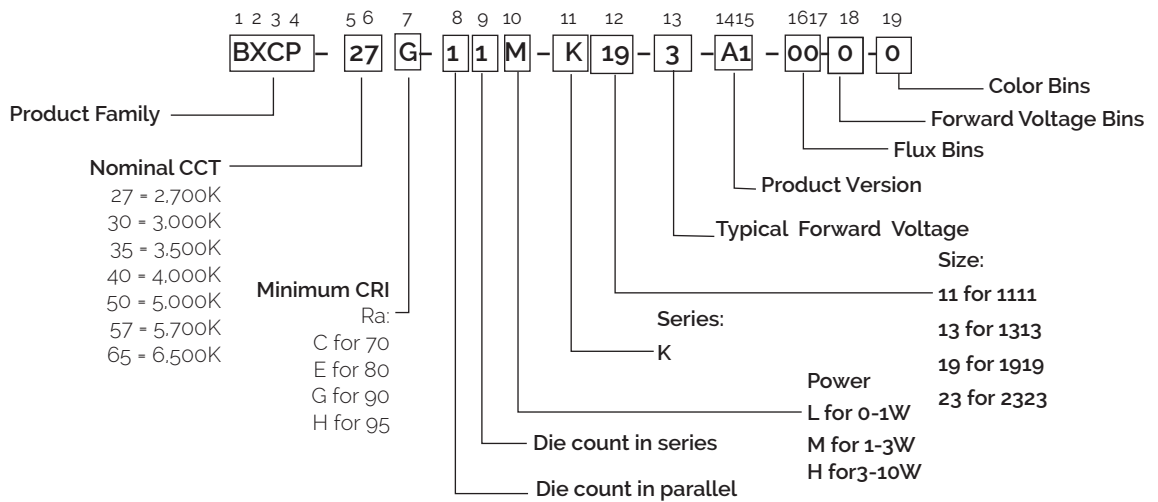

## Product Test Conditions

Bridgelux CSP 1919 LEDs are tested and binned with a 10ms pulse of 350mA at  $T_j$  (junction temperature) =  $T_{sp}$  (solder point temperature) = 85°C. Luminous flux, color and forward voltage are binned at  $T_j = T_{sp} = 85^\circ\text{C}$ .

# Product Selection Guide

The following product configurations are available:

**Table 1:** Selection Guide, Pulsed Measurement Data at 500mA ( $T_j = T_{sp} = 25^\circ\text{C}$ )

Part Number <sup>1,5</sup>	Nominal CCT <sup>2</sup> (K)	CRI <sup>3,4</sup>	Nominal Drive Current (mA)	Forward Voltage <sup>4</sup> (V)			Typical Pulsed Flux <sup>4</sup> (lm)	Typical Power (W)	Typical Efficacy (lm/W)
				Min	Typical	Max			
BXCP-27C-11M-K19-3-A1-00-0-0	2700	70	500	2.80	3.00	3.30	240	1.50	160
BXCP-30C-11M-K19-3-A1-00-0-0	3000	70	500	2.80	3.00	3.30	256	1.50	171
BXCP-40C-11M-K19-3-A1-00-0-0	4000	70	500	2.80	3.00	3.30	269	1.50	179
BXCP-50C-11M-K19-3-A1-00-0-0	5000	70	500	2.80	3.00	3.30	269	1.50	179
BXCP-57C-11M-K19-3-A1-00-0-0	5700	70	500	2.80	3.00	3.30	269	1.50	179
BXCP-65C-11M-K19-3-A1-00-0-0	6500	70	500	2.80	3.00	3.30	269	1.50	179
BXCP-27E-11M-K19-3-A1-00-0-0	2700	80	500	2.80	3.00	3.30	219	1.50	146
BXCP-30E-11M-K19-3-A1-00-0-0	3000	80	500	2.80	3.00	3.30	229	1.50	153
BXCP-40E-11M-K19-3-A1-00-0-0	4000	80	500	2.80	3.00	3.30	250	1.50	167
BXCP-50E-11M-K19-3-A1-00-0-0	5000	80	500	2.80	3.00	3.30	250	1.50	167
BXCP-57E-11M-K19-3-A1-00-0-0	5700	80	500	2.80	3.00	3.30	250	1.50	167
BXCP-65E-11M-K19-3-A1-00-0-0	6500	80	500	2.80	3.00	3.30	250	1.50	167
BXCP-27G-11M-K19-3-A1-00-0-0	2700	90	500	2.80	3.00	3.30	185	1.50	123
BXCP-30G-11M-K19-3-A1-00-0-0	3000	90	500	2.80	3.00	3.30	194	1.50	130
BXCP-40G-11M-K19-3-A1-00-0-0	4000	90	500	2.80	3.00	3.30	208	1.50	139
BXCP-50G-11M-K19-3-A1-00-0-0	5000	90	500	2.80	3.00	3.30	208	1.50	139
BXCP-57G-11M-K19-3-A1-00-0-0	5700	90	500	2.80	3.00	3.30	208	1.50	139
BXCP-65G-11M-K19-3-A1-00-0-0	6500	90	500	2.80	3.00	3.30	208	1.50	139
BXCP-27H-11M-K19-3-A1-00-0-0	2700	95	500	2.80	3.00	3.30	165	1.50	110
BXCP-30H-11M-K19-3-A1-00-0-0	3000	95	500	2.80	3.00	3.30	175	1.50	116
BXCP-40H-11M-K19-3-A1-00-0-0	4000	95	500	2.80	3.00	3.30	195	1.50	130
BXCP-50H-11M-K19-3-A1-00-0-0	5000	95	500	2.80	3.00	3.30	195	1.50	130
BXCP-57H-11M-K19-3-A1-00-0-0	5700	95	500	2.80	3.00	3.30	195	1.50	130
BXCP-65H-11M-K19-3-A1-00-0-0	6500	95	500	2.80	3.00	3.30	195	1.50	130

Notes for Table 1:

- The last 6 characters (including hyphens '-') refer to nominal flux, nominal forward voltage, and color bins, respectively. "00-0-0" denotes the full distribution of flux, forward voltage, and 5 SDCM color.  
Example: BXCP-27G-11M-K19-3-A1-00-0-0 refers to the full distribution of flux, forward voltage, and color within a 2700K 5-step ANSI standard chromaticity region with a minimum of 90 CRI.
- Product CCT is hot targeted at  $T_{sp} = 85^\circ\text{C}$ . Nominal CCT as defined by ANSI C78.377-2011.
- Listed CRIs are minimum values and include test tolerance.
- Products tested under pulsed condition (10ms pulse width) at nominal drive current where  $T_j = T_{sp} = 25^\circ\text{C}$ .
- Bridgelux maintains a  $\pm 7.5\%$  tolerance on luminous flux measurements,  $\pm 0.1\text{V}$  tolerance on forward voltage measurements, and  $\pm 2$  tolerance on CRI measurements for the CSP.
- Refer to Table 6 and Table 7 for Bridgelux CSP Luminous Flux Binning and Forward Voltage Binning information.

# Product Selection Guide

**Table 2:** Selection Guide, Pulsed Measurement Data at 500mA ( $T_j = T_{sp} = 85^\circ\text{C}$ )

Part Number <sup>4,5</sup>	Nominal CCT <sup>2</sup> (K)	CRI <sup>3,4</sup>	Nominal Drive Current (mA)	Forward Voltage <sup>4</sup> (V)			Typical Pulsed Flux <sup>4</sup> (lm)	Typical Power (W)	Typical Efficacy (lm/W)
				Min	Typical	Max			
BXCP-27C-11M-K19-3-A1-00-0-0	2700	70	500	2.70	2.90	3.20	218	145	150
BXCP-30C-11M-K19-3-A1-00-0-0	3000	70	500	2.70	2.90	3.20	232	145	160
BXCP-40C-11M-K19-3-A1-00-0-0	4000	70	500	2.70	2.90	3.20	244	145	168
BXCP-50C-11M-K19-3-A1-00-0-0	5000	70	500	2.70	2.90	3.20	244	145	168
BXCP-57C-11M-K19-3-A1-00-0-0	5700	70	500	2.70	2.90	3.20	244	145	168
BXCP-65C-11M-K19-3-A1-00-0-0	6500	70	500	2.70	2.90	3.20	244	145	168
BXCP-27E-11M-K19-3-A1-00-0-0	2700	80	500	2.70	2.90	3.20	199	145	137
BXCP-30E-11M-K19-3-A1-00-0-0	3000	80	500	2.70	2.90	3.20	208	145	144
BXCP-40E-11M-K19-3-A1-00-0-0	4000	80	500	2.70	2.90	3.20	227	145	157
BXCP-50E-11M-K19-3-A1-00-0-0	5000	80	500	2.70	2.90	3.20	227	145	157
BXCP-57E-11M-K19-3-A1-00-0-0	5700	80	500	2.70	2.90	3.20	227	145	157
BXCP-65E-11M-K19-3-A1-00-0-0	6500	80	500	2.70	2.90	3.20	227	145	157
BXCP-27G-11M-K19-3-A1-00-0-0	2700	90	500	2.70	2.90	3.20	168	145	116
BXCP-30G-11M-K19-3-A1-00-0-0	3000	90	500	2.70	2.90	3.20	176	145	122
BXCP-40G-11M-K19-3-A1-00-0-0	4000	90	500	2.70	2.90	3.20	189	145	130
BXCP-50G-11M-K19-3-A1-00-0-0	5000	90	500	2.70	2.90	3.20	189	145	130
BXCP-57G-11M-K19-3-A1-00-0-0	5700	90	500	2.70	2.90	3.20	189	145	130
BXCP-65G-11M-K19-3-A1-00-0-0	6500	90	500	2.70	2.90	3.20	189	145	130
BXCP-27H-11M-K19-3-A1-00-0-0	2700	95	500	2.70	2.90	3.20	150	145	103
BXCP-30H-11M-K19-3-A1-00-0-0	3000	95	500	2.70	2.90	3.20	158	145	109
BXCP-40H-11M-K19-3-A1-00-0-0	4000	95	500	2.70	2.90	3.20	177	145	122
BXCP-50H-11M-K19-3-A1-00-0-0	5000	95	500	2.70	2.90	3.20	177	145	122
BXCP-57H-11M-K19-3-A1-00-0-0	5700	95	500	2.70	2.90	3.20	177	145	122
BXCP-65H-11M-K19-3-A1-00-0-0	6500	95	500	2.70	2.90	3.20	177	145	122

Notes for Table 2:

- The last 6 characters (including hyphens '-') refer to nominal flux, nominal forward voltage, and color bins, respectively. "00-0-0" denotes the full distribution of flux, forward voltage, and 5 SDCM color.  
Example: BXCP-27G-11M-K19-3-A1-00-0-0 refers to the full distribution of flux, forward voltage, and color within a 2700K 5-step ANSI standard chromaticity region with a minimum of 90 CRI.
- Product CCT is hot targeted at  $T_{sp} = 85^\circ\text{C}$ . Nominal CCT as defined by ANSI C78.377-2011.
- Listed CRIs are minimum values and include test tolerance.
- Bridgelux maintains a  $\pm 7.5\%$  tolerance on luminous flux measurements,  $\pm 0.1\text{V}$  tolerance on forward voltage measurements, and  $\pm 2$  tolerance on CRI measurements for the CSP.
- Refer to Table 6 and Table 7 for Bridgelux CSP Luminous Flux Binning and Forward Voltage Binning information.
- Products tested under pulsed condition (10ms pulse width) at nominal drive current where  $T_j = T_{sp} = 85^\circ\text{C}$ .

# Performance at Commonly Used Drive Currents

CSP 1919 LEDs specifications at nominal drive current are shown in Table 1 and Table 2. CSP 1919 may also be driven at other drive currents dependent on specific application design requirements. The performance at any drive current can be derived from the current vs. voltage characteristics shown in Figure 2 and the relative luminous flux vs. current characteristics shown in Figure 3. The performance at commonly used drive currents is summarized in Table 3.

**Table 3:** Performance at Commonly Used Drive Currents

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical $V_f$ $T_{sp} = 25^\circ\text{C}$ (V)	Typical Power $T_{sp} = 25^\circ\text{C}$ (W)	Typical Pulsed Flux <sup>2</sup> $T_{sp} = 25^\circ\text{C}$ (lm)	Typical Pulsed Flux <sup>3</sup> $T_{sp} = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_{sp} = 25^\circ\text{C}$ (lm/W)
BXCP-27C-11M-K19-3-A1-00-0-0	70	50	2.6	0.1	27	25	204
		250	2.8	0.7	128	117	182
		350	2.9	1.0	175	158	171
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>240</b>	<b>218</b>	<b>160</b>
		700	3.1	2.2	322	293	148
		900	3.2	2.9	395	358	136
		1200	3.4	4.1	493	448	121
BXCP-30C-11M-K19-3-A1-00-0-0	70	50	2.6	0.1	29	26	218
		250	2.8	0.7	137	124	194
		350	2.9	1.0	186	169	183
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>256</b>	<b>232</b>	<b>171</b>
		700	3.1	2.2	344	312	158
		900	3.2	2.9	421	382	145
		1200	3.4	4.1	526	478	130
BXCP-40C-11M-K19-3-A1-00-0-0	70	50	2.6	0.1	30	28	229
		250	2.8	0.7	144	131	204
		350	2.9	1.0	196	178	192
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>269</b>	<b>244</b>	<b>179</b>
		700	3.1	2.2	361	328	166
		900	3.2	2.9	442	402	152
		1200	3.4	4.1	553	502	136
BXCP-50C-11M-K19-3-A1-00-0-0	70	50	2.6	0.1	30	28	229
		250	2.8	0.7	144	131	204
		350	2.9	1.0	196	178	192
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>269</b>	<b>244</b>	<b>179</b>
		700	3.1	2.2	361	328	166
		900	3.2	2.9	442	402	152
		1200	3.4	4.1	553	502	136
BXCP-57C-11M-K19-3-A1-00-0-0	70	50	2.6	0.1	30	28	229
		250	2.8	0.7	144	131	204
		350	2.9	1.0	196	178	192
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>269</b>	<b>244</b>	<b>179</b>
		700	3.1	2.2	361	328	166
		900	3.2	2.9	442	402	152
		1200	3.4	4.1	553	502	136

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a  $\pm 7.5\%$  tolerance on flux measurements.
3. Typical pulsed performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 3:** Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical $V_f$ $T_{sp} = 25^\circ\text{C}$ (V)	Typical Power $T_{sp} = 25^\circ\text{C}$ (W)	Typical Pulsed Flux <sup>2</sup> $T_{sp} = 25^\circ\text{C}$ (lm)	Typical Pulsed Flux <sup>3</sup> $T_{sp} = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_{sp} = 25^\circ\text{C}$ (lm/W)
BXCP-65C-11M-K19-3-A1-00-0-0	70	50	2.6	0.1	30	28	229
		250	2.8	0.7	144	131	204
		350	2.9	1.0	196	178	192
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>269</b>	<b>244</b>	<b>179</b>
		700	3.1	2.2	361	328	166
		900	3.2	2.9	442	402	152
		1200	3.4	4.1	553	502	136
BXCP-27E-11M-K19-3-A1-00-0-0	80	50	2.6	0.1	25	22	186
		250	2.8	0.7	117	106	166
		350	2.9	1.0	159	144	156
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>219</b>	<b>199</b>	<b>146</b>
		700	3.1	2.2	294	267	135
		900	3.2	2.9	360	327	124
		1200	3.4	4.1	450	408	111
BXCP-30E-11M-K19-3-A1-00-0-0	80	50	2.6	0.1	26	23	195
		250	2.8	0.7	123	111	174
		350	2.9	1.0	167	151	164
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>229</b>	<b>208</b>	<b>153</b>
		700	3.1	2.2	308	280	142
		900	3.2	2.9	377	342	130
		1200	3.4	4.1	471	428	116
BXCP-40E-11M-K19-3-A1-00-0-0	80	50	2.6	0.1	28	26	213
		250	2.8	0.7	134	121	190
		350	2.9	1.0	182	165	179
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>250</b>	<b>227</b>	<b>167</b>
		700	3.1	2.2	336	305	154
		900	3.2	2.9	411	374	142
		1200	3.4	4.1	514	467	127
BXCP-50E-11M-K19-3-A1-00-0-0	80	50	2.6	0.1	28	26	213
		250	2.8	0.7	134	121	190
		350	2.9	1.0	182	165	179
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>250</b>	<b>227</b>	<b>167</b>
		700	3.1	2.2	336	305	154
		900	3.2	2.9	411	374	142
		1200	3.4	4.1	514	467	127

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a  $\pm 7.5\%$  tolerance on flux measurements.
3. Typical pulsed performance values are provided as reference only and are not a guarantee of performance.



# Performance at Commonly Used Drive Currents

**Table 3:** Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical $V_f$ $T_{sp} = 25^\circ\text{C}$ (V)	Typical Power $T_{sp} = 25^\circ\text{C}$ (W)	Typical Pulsed Flux <sup>2</sup> $T_{sp} = 25^\circ\text{C}$ (lm)	Typical Pulsed Flux <sup>3</sup> $T_{sp} = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_{sp} = 25^\circ\text{C}$ (lm/W)
BXCP-57E-11M-K19-3-A1-00-0-0	80	50	2.6	0.1	28	26	213
		250	2.8	0.7	134	121	190
		350	2.9	1.0	182	165	179
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>250</b>	<b>227</b>	<b>167</b>
		700	3.1	2.2	336	305	154
		900	3.2	2.9	411	374	142
		1200	3.4	4.1	514	467	127
BXCP-65E-11M-K19-3-A1-00-0-0	80	50	2.6	0.1	28	26	213
		250	2.8	0.7	134	121	190
		350	2.9	1.0	182	165	179
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>250</b>	<b>227</b>	<b>167</b>
		700	3.1	2.2	336	305	154
		900	3.2	2.9	411	374	142
		1200	3.4	4.1	514	467	127
BXCP-27G-11M-K19-3-A1-00-0-0	90	50	2.6	0.1	21	19	157
		250	2.8	0.7	99	90	140
		350	2.9	1.0	135	122	133
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>185</b>	<b>168</b>	<b>123</b>
		700	3.1	2.2	249	226	114
		900	3.2	2.9	304	276	105
		1200	3.4	4.1	380	345	94
BXCP-30G-11M-K19-3-A1-00-0-0	90	50	2.6	0.1	22	20	165
		250	2.8	0.7	104	94	147
		350	2.9	1.0	141	128	139
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>194</b>	<b>176</b>	<b>130</b>
		700	3.1	2.2	261	237	120
		900	3.2	2.9	320	290	110
		1200	3.4	4.1	399	363	98
BXCP-40G-11M-K19-3-A1-00-0-0	90	50	2.6	0.1	23	21	177
		250	2.8	0.7	111	101	158
		350	2.9	1.0	151	138	149
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>208</b>	<b>189</b>	<b>139</b>
		700	3.1	2.2	280	254	129
		900	3.2	2.9	343	311	118
		1200	3.4	4.1	428	389	105

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a  $\pm 7.5\%$  tolerance on flux measurements.
3. Typical pulsed performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 3:** Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical $V_f$ $T_{sp} = 25^\circ\text{C}$ (V)	Typical Power $T_{sp} = 25^\circ\text{C}$ (W)	Typical Pulsed Flux <sup>2</sup> $T_{sp} = 25^\circ\text{C}$ (lm)	Typical Pulsed Flux <sup>3</sup> $T_{sp} = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_{sp} = 25^\circ\text{C}$ (lm/W)
BXCP-50G-11M-K19-3-A1-00-0-0	90	50	2.6	0.1	23	21	177
		250	2.8	0.7	111	101	158
		350	2.9	1.0	151	138	149
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>208</b>	<b>189</b>	<b>139</b>
		700	3.1	2.2	280	254	129
		900	3.2	2.9	343	311	118
		1200	3.4	4.1	428	389	105
BXCP-57G-11M-K19-3-A1-00-0-0	90	50	2.6	0.1	23	21	177
		250	2.8	0.7	111	101	158
		350	2.9	1.0	151	138	149
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>208</b>	<b>189</b>	<b>139</b>
		700	3.1	2.2	280	254	129
		900	3.2	2.9	343	311	118
		1200	3.4	4.1	428	389	105
BXCP-65G-11M-K19-3-A1-00-0-0	90	50	2.6	0.1	23	21	177
		250	2.8	0.7	111	101	158
		350	2.9	1.0	151	138	149
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>208</b>	<b>189</b>	<b>139</b>
		700	3.1	2.2	280	254	129
		900	3.2	2.9	343	311	118
		1200	3.4	4.1	428	389	105
BXCP-27H-11M-K19-3-A1-00-0-0	95	50	2.6	0.1	19	17	140
		250	2.8	0.7	88	80	125
		350	2.9	1.0	120	109	118
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>165</b>	<b>150</b>	<b>110</b>
		700	3.1	2.2	222	202	102
		900	3.2	2.9	272	247	94
		1200	3.4	4.1	340	308	84
BXCP-30H-11M-K19-3-A1-00-0-0	95	50	2.6	0.1	20	18	148
		250	2.8	0.7	93	85	132
		350	2.9	1.0	127	115	125
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>175</b>	<b>158</b>	<b>116</b>
		700	3.1	2.2	235	213	108
		900	3.2	2.9	287	261	99
		1200	3.4	4.1	359	326	88

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a  $\pm 7.5\%$  tolerance on flux measurements.
3. Typical pulsed performance values are provided as reference only and are not a guarantee of performance.

# Performance at Commonly Used Drive Currents

**Table 3:** Performance at Commonly Used Drive Currents (Continued)

Part Number	CRI	Drive Current <sup>1</sup> (mA)	Typical $V_f$ $T_{sp} = 25^\circ\text{C}$ (V)	Typical Power $T_{sp} = 25^\circ\text{C}$ (W)	Typical Pulsed Flux <sup>2</sup> $T_{sp} = 25^\circ\text{C}$ (lm)	Typical Pulsed Flux <sup>3</sup> $T_{sp} = 85^\circ\text{C}$ (lm)	Typical Efficacy $T_{sp} = 25^\circ\text{C}$ (lm/W)
BXCP-40H-11M-K19-3-A1-00-0-0	95	50	2.6	0.1	22	20	166
		250	2.8	0.7	105	95	148
		350	2.9	1.0	142	129	140
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>195</b>	<b>178</b>	<b>130</b>
		700	3.1	2.2	263	238	121
		900	3.2	2.9	322	292	111
		1200	3.4	4.1	402	365	99
BXCP-50H-11M-K19-3-A1-00-0-0	95	50	2.6	0.1	22	20	166
		250	2.8	0.7	105	95	148
		350	2.9	1.0	142	129	140
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>195</b>	<b>178</b>	<b>130</b>
		700	3.1	2.2	263	238	121
		900	3.2	2.9	322	292	111
		1200	3.4	4.1	402	365	99
BXCP-57H-11M-K19-3-A1-00-0-0	95	50	2.6	0.1	22	20	166
		250	2.8	0.7	105	95	148
		350	2.9	1.0	142	129	140
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>195</b>	<b>178</b>	<b>130</b>
		700	3.1	2.2	263	238	121
		900	3.2	2.9	322	292	111
		1200	3.4	4.1	402	365	99
BXCP-65H-11M-K19-3-A1-00-0-0	95	50	2.6	0.1	22	20	166
		250	2.8	0.7	105	95	148
		350	2.9	1.0	142	129	140
		<b>500</b>	<b>3.0</b>	<b>1.5</b>	<b>195</b>	<b>178</b>	<b>130</b>
		700	3.1	2.2	263	238	121
		900	3.2	2.9	322	292	111
		1200	3.4	4.1	402	365	99

Notes for Table 3:

1. Alternate drive currents in Table 3 are provided for reference only and are not a guarantee of performance.
2. Bridgelux maintains a  $\pm 7.5\%$  tolerance on flux measurements.
3. Typical pulsed performance values are provided as reference only and are not a guarantee of performance.

# Electrical and Thermal Characteristics

**Table 4:** Electrical and Thermal Characteristics

Part Number <sup>1</sup>	Drive Current (mA)	Forward Voltage <sup>2,3</sup> (V)			Typical Temperature Coefficient of Forward Voltage <sup>4</sup> $\Delta V_f / \Delta T$ (mV/°C)	Typical Thermal Resistance Junction to Solder Point <sup>5,6</sup> $R_{j-sp}$ (°C/W)
		Minimum	Typical	Maximum		
BXCP-xxx-11M-K19-3-A1-00-0-0	350	2.60	2.80	3.20	-1.5	3.5

Notes for Table 4:

- The last 6 characters (including hyphens '-') refer to nominal flux, nominal forward voltage, and color bins, respectively. "00-0-0" denotes the full distribution of flux, forward voltage, and 5 SDCM color.  
Example: BXCP-27G-11M-K19-3-A1-00-0-0 refers to the full distribution of flux, forward voltage, and color within a 2700K 5-step ANSI standard chromaticity region with a minimum of 90 CRI.
- Products tested under pulsed condition (10ms pulse width) where  $T_{sp} = 85^{\circ}\text{C}$ .
- Bridgelux maintains a tolerance of  $\pm 0.1\text{V}$  on forward voltage measurements.
- Products measured between  $25^{\circ}\text{C}$  and  $105^{\circ}\text{C}$  under pulsed condition (10ms pulse width).
- Thermal Resistance values based on 2700K 90 CRI product.
- Thermal resistance value was calculated using total electrical input power; optical power was not subtracted from input power.

# Absolute Maximum Ratings

**Table 5:** Maximum Ratings

Parameter	Maximum Rating
LED Junction Temperature ( $T_j$ )	135°C
Storage Temperature	-40°C to +125°C
Operating Solder Point Temperature ( $T_{sp}$ )	-40°C to +105°C
Soldering Temperature	260°C or lower for a maximum of 10 seconds
Maximum Drive Current <sup>1</sup>	1200mA
Maximum Peak Pulsed Forward Current <sup>2</sup>	1500mA
Maximum Reverse Voltage <sup>3</sup>	-5V
Moisture Sensitivity Rating	MSL 3
Electrostatic Discharge	2kV HBM. JEDEC-JS-001-HBM and JEDEC-JS-001-2012

Notes for Table 5:

1. The maximum drive current is limited depending on the solder point temperature. Refer to Figure 7.
2. Bridgelux recommends a maximum duty cycle of 10% and pulse width of 10 ms when operating CSP LED at maximum peak pulsed current specified. Maximum peak pulsed currents indicate values where CSP LED can be driven without catastrophic failures.
3. Light emitting diodes are not designed to be driven in reverse voltage and will not produce light under this condition. Maximum rating provided for reference only.

# Product Bin Definitions

Table 6 lists the standard photometric luminous flux bins for Bridgelux CSP 1919 LEDs. Although several bins are outlined, product availability in a particular bin varies by production run and by product performance. Not all bins are available in all CCTs.

**Table 6:** Luminous Flux Bin Definitions at 350mA,  $T_{sp}=85^{\circ}\text{C}$

Bin Code	Minimum	Maximum	Unit	Condition
G1	90	100	lm	$I_F=350\text{mA}$
H1	100	110		
I1	110	120		
J1	120	130		
K1	130	140		
M1	140	150		
N1	150	160		
P1	160	170		
Q1	170	180		
R1	180	190		
S1	190	200		

Note for Table 6:

1. Bridgelux maintains a tolerance of  $\pm 7.5\%$  on luminous flux measurements.

**Table 7:** Forward Voltage Bin Definition at 350mA,  $T_{sp}=85^{\circ}\text{C}$

Bin Code	Minimum	Maximum	Unit	Condition
C	2.6	2.8	V	$I_F=350\text{mA}$
D	2.8	3.0		
E	3.0	3.2		
F	3.2	3.4		

Note for Table 7:

1. Bridgelux maintains a tolerance of  $\pm 0.1\text{V}$  on forward voltage measurements.

# Product Bin Definitions

**Table 8:** 3- and 5-step MacAdam Ellipse Color Bin Definitions ( $T_{sp}=85^{\circ}\text{C}$ )



Table 8: 3- and 5-step MacAdam Ellipse Color Bin Definitions ( $T_{sp}=85^{\circ}\text{C}$ )							
CCT	Color Space	Center Point		Major Axis	minor Axis	$\theta$ (angle)	Color Bin
		x	y				
1800K	3	0.5496	0.4082	0.00698	0.00393	40.000	3
	5			0.01164	0.00655		5(E/F/G/H)
2000K	3	0.5251	0.4120	0.00723	0.00399	51.000	3
	5			0.01205	0.00665		5(E/F/G/H)
2200K	3	0.5056	0.4152	0.00723	0.00399	51.918	3
	5			0.01205	0.00665		5(E/F/G/H)
2700K	3	0.4578	0.4101	0.00810	0.00420	53.700	3
	5			0.01350	0.00700		5(E/F/G/H)
3000K	3	0.4338	0.4030	0.00834	0.00408	53.220	3
	5			0.01390	0.00680		5(E/F/G/H)
3500K	3	0.4073	0.3917	0.00927	0.00414	54.000	3
	5			0.01545	0.00690		5(E/F/G/H)
4000K	3	0.3818	0.3797	0.00939	0.00402	53.720	3
	5			0.01565	0.00670		5(E/F/G/H)
5000K	3	0.3447	0.3553	0.00822	0.00354	59.620	3
	5			0.01370	0.00590		5(E/F/G/H)
5700K	3	0.3287	0.3417	0.00746	0.00320	59.090	3
	5			0.01243	0.00533		5(E/F/G/H)
6500K	3	0.3123	0.3282	0.00669	0.00285	58.570	3
	5			0.01115	0.00475		5(E/F/G/H)

Note for Table 8:

1. Bridgelux maintains a tolerance of  $\pm 0.007$  on x and y color coordinates in the CIE 1931 color space.
2. MacAdam Ellipse Color bin code for  $\text{CRI} \geq 90$ : 3(3 SDCM)/ EFGH(5 SDCM).
3. MacAdam Ellipse Color bin code for  $\text{CRI} < 90$ : 3(3 SDCM)/ 5(5 SDCM).

# Product Bin Definitions

Figure 1: C.I.E. 1931 Chromaticity Diagram ( Color Bin Structure,  $T_{sp} = 85^{\circ}\text{C}$ )

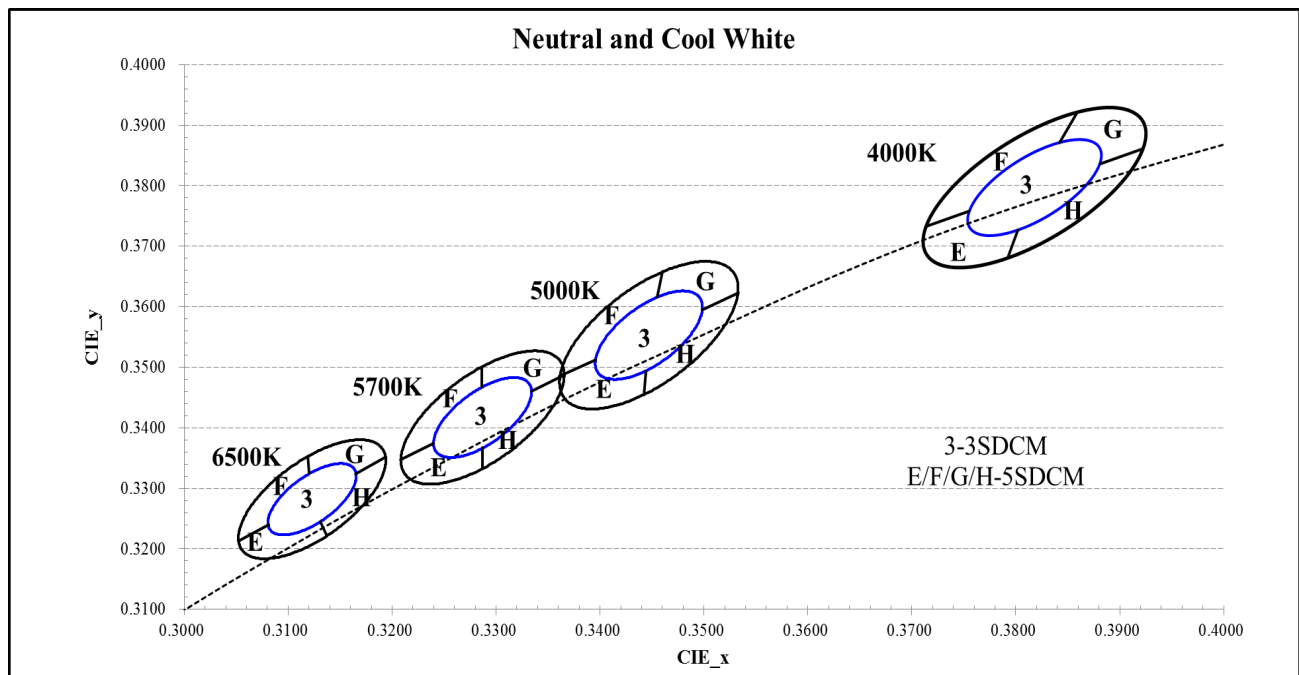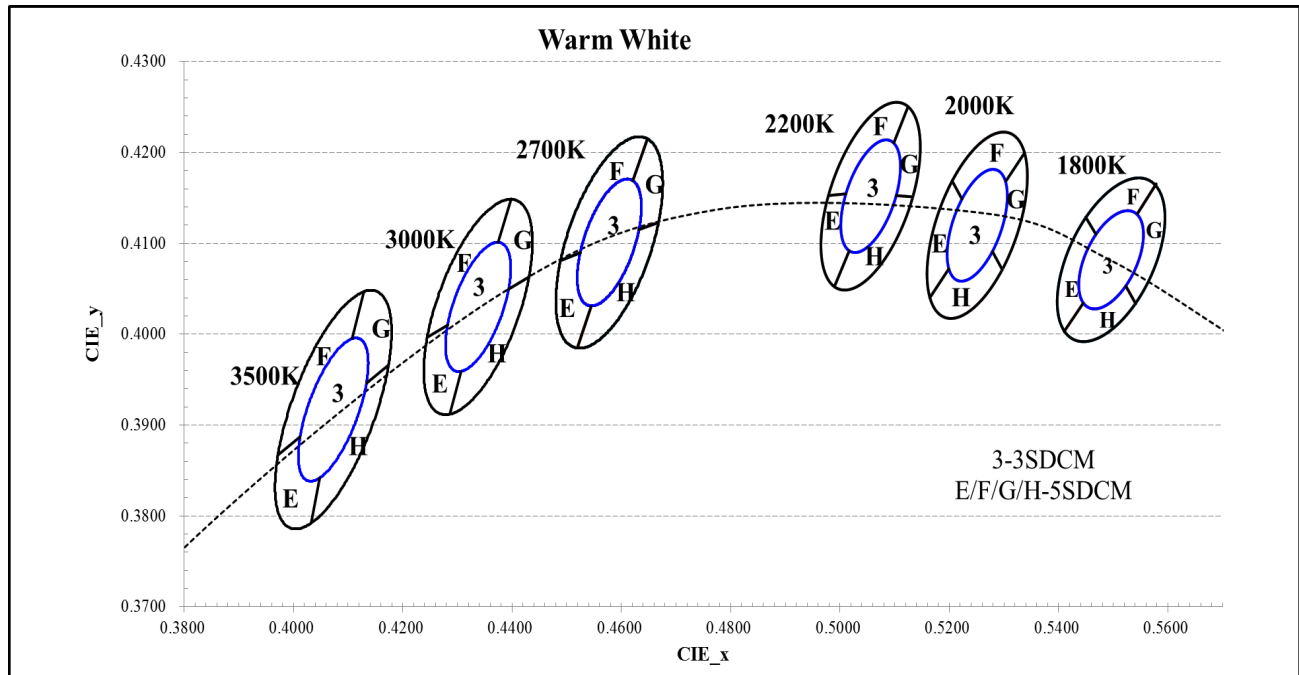



# Performance Curves

Figure 2: Drive Current vs. Voltage ( $T_{sp}=85^{\circ}\text{C}$ )


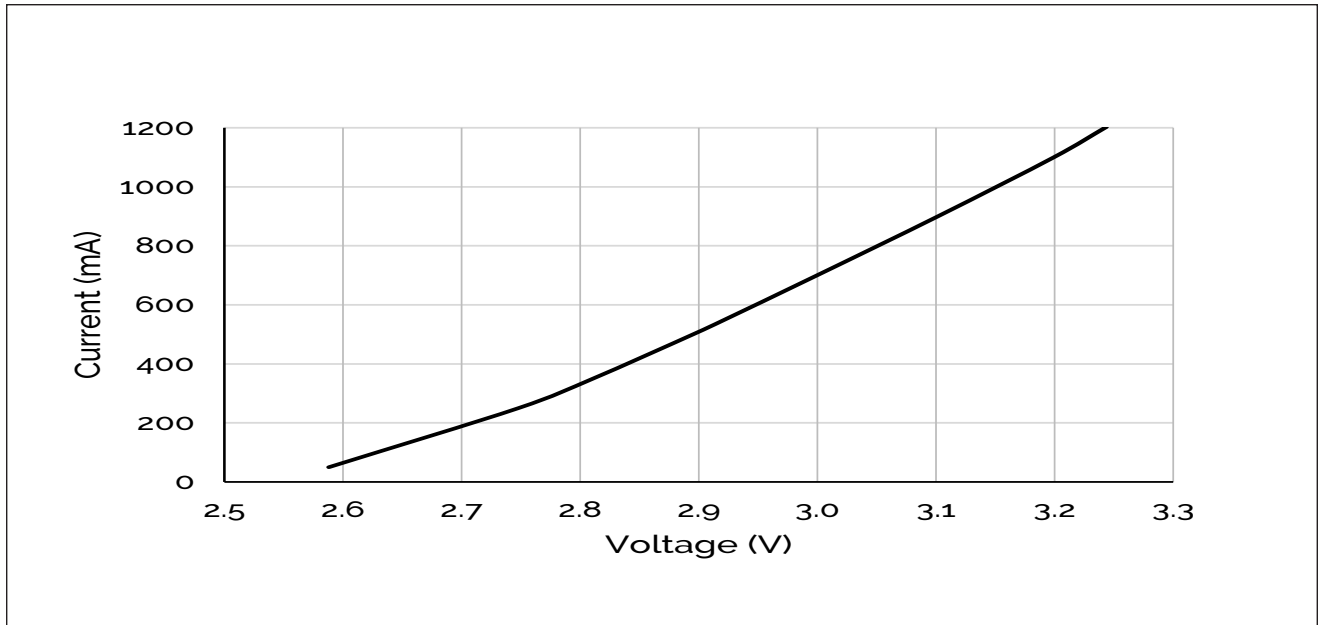


Figure 3: Typical Relative Luminous Flux vs. Drive Current ( $T_{sp}=85^{\circ}\text{C}$ )

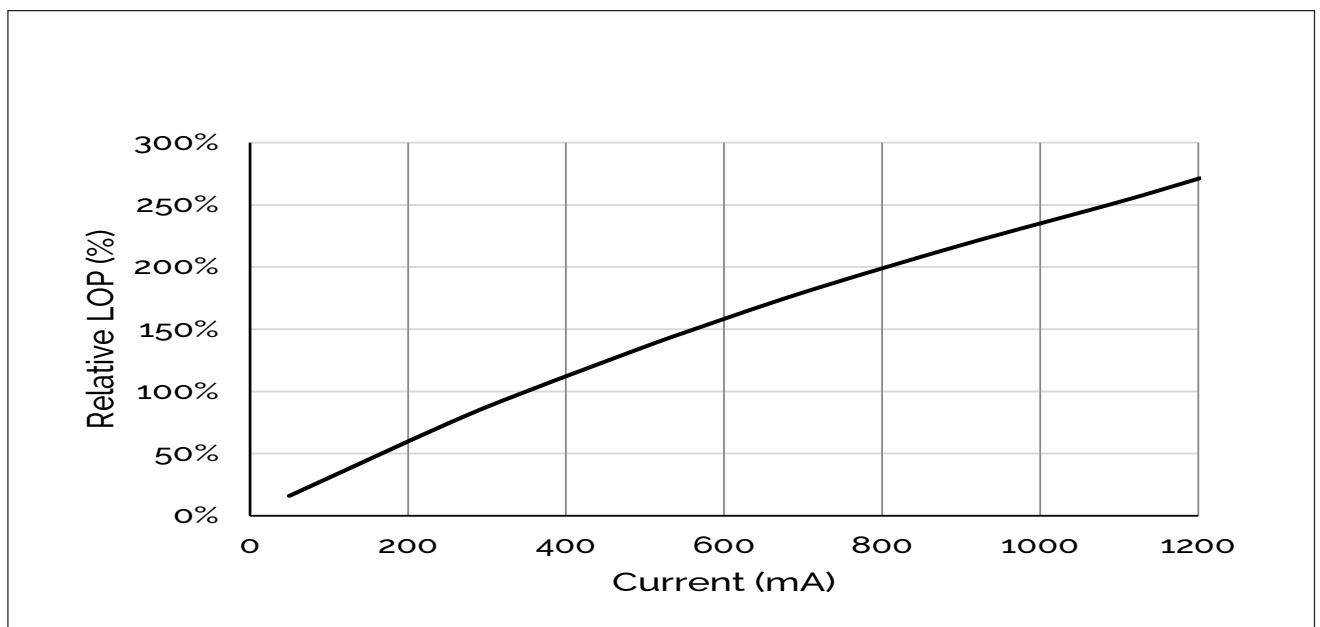

Note for Figure 3:

1. Bridgelux does not recommend driving this CSP LED at low current ( $< 10\text{mA}$ ). Doing so may produce unpredictable results. Pulse width modulation (PWM) is recommended for dimming effects.

# Performance Curves

Figure 4: Typical Relative Flux vs. Solder Point Temperature\_350mA


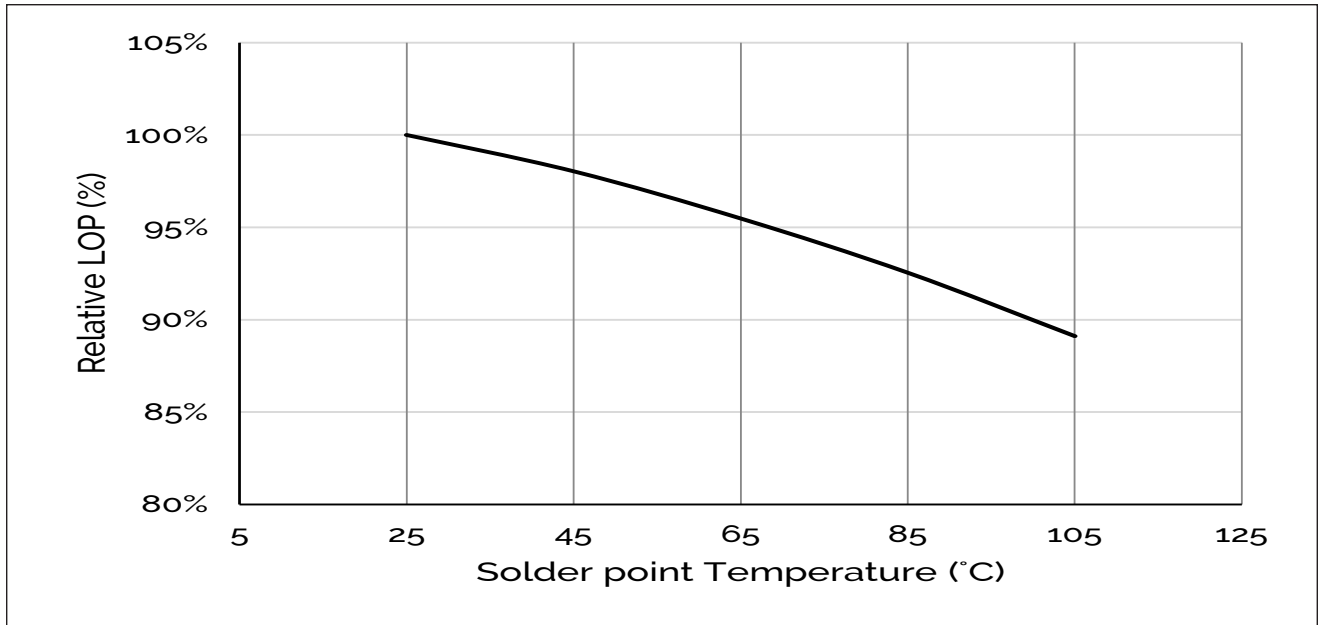


Figure 5: Typical ccy Shift vs. Solder Point Temperature\_350mA

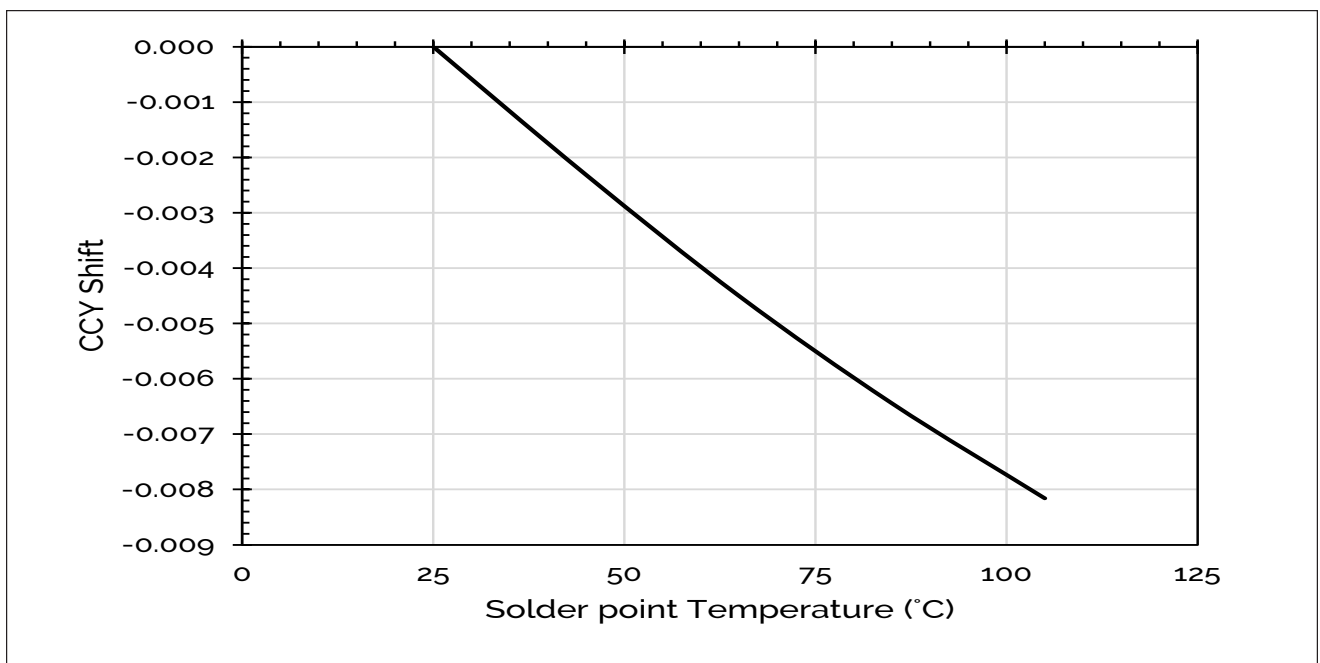


Notes for Figures 4 & 5:

- 1.Characteristics shown for warm white based on 2700K and 90 CRI.
- 2.For other color SKUs, the shift in color will vary. Please contact your Bridgelux Sales Representative for more information.

# Performance Curves


Figure 6: Typical ccx Shift vs. Solder Point Temperature\_350mA

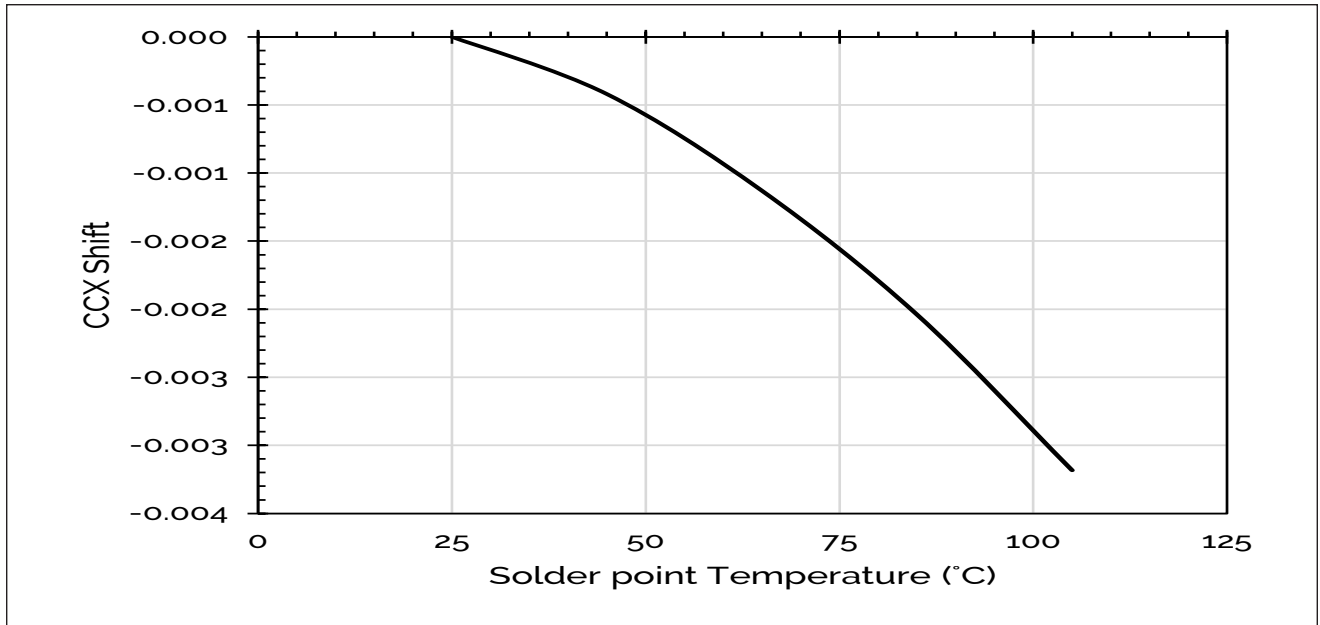

Notes for Figure 6:


1. Characteristics shown for warm white based on 2700K and 90 CRI.
2. For other color SKUs, the shift in color will vary. Please contact your Bridgelux Sales Representative for more information.

Figure 7: Drive Current vs Solder Point Temperature

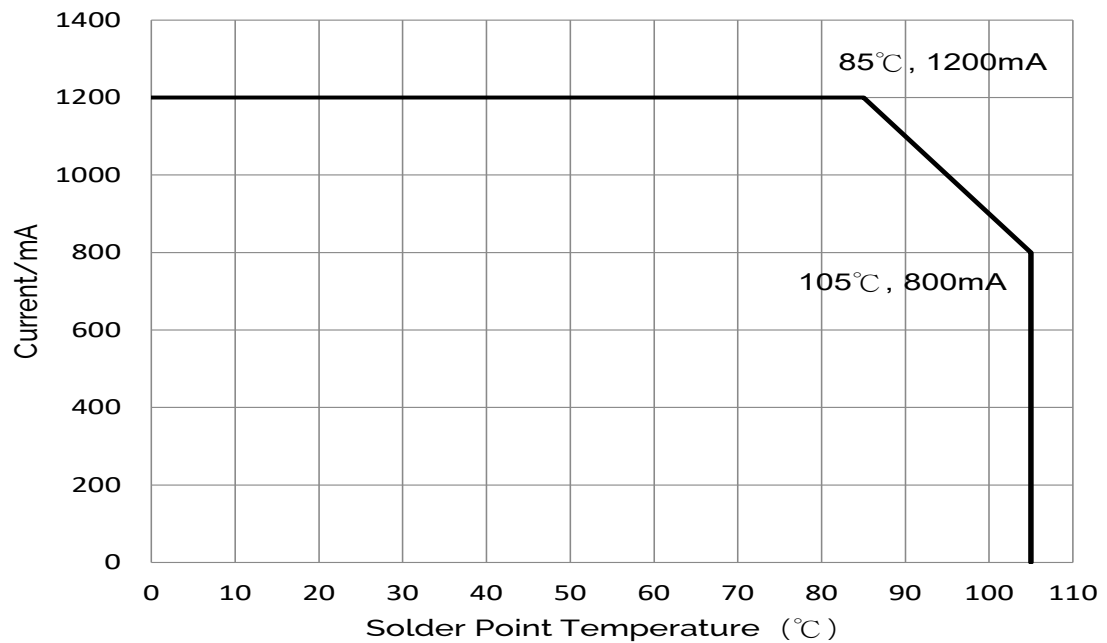

# Typical Radiation Pattern


Figure 8: Typical Spatial Radiation Pattern at 350mA,  $T_{sp} = 25^{\circ}\text{C}$

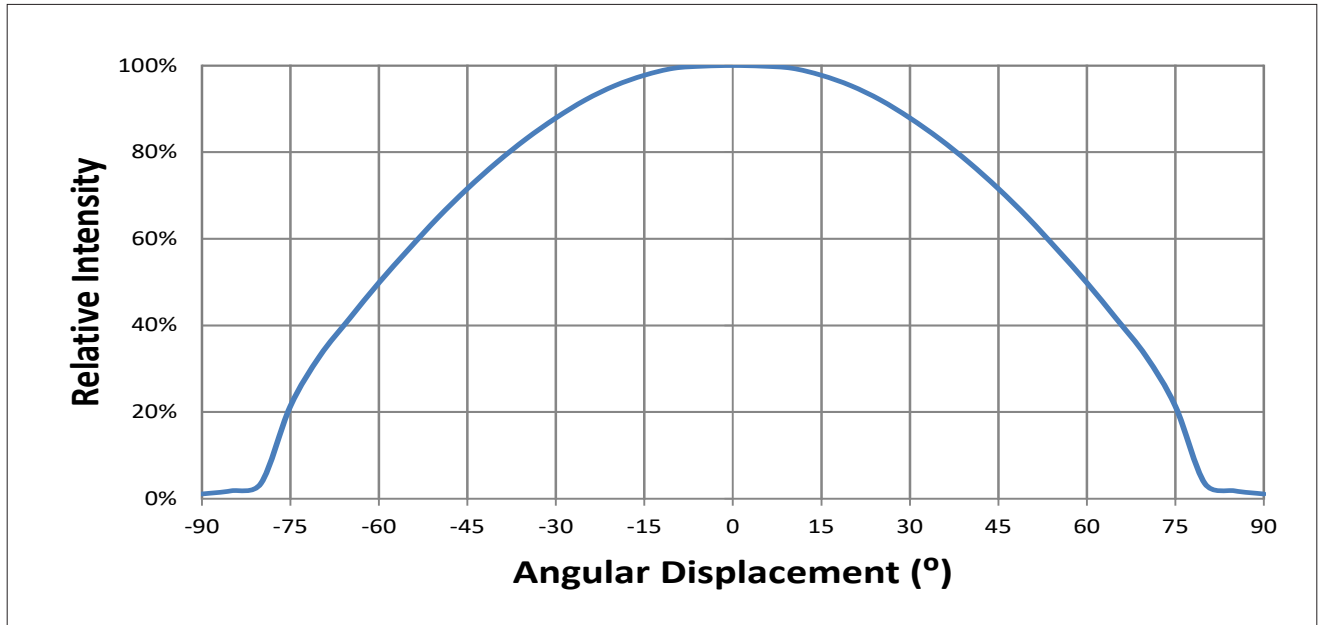

Notes for Figure 8:


1. Typical viewing angle is  $120^{\circ}$ .
2. The viewing angle is defined as the off axis angle from the centerline where  $I_v$  is  $\frac{1}{2}$  of the peak value.

Figure 9: Typical Polar Radiation Pattern at 350mA,  $T_{sp} = 25^{\circ}\text{C}$

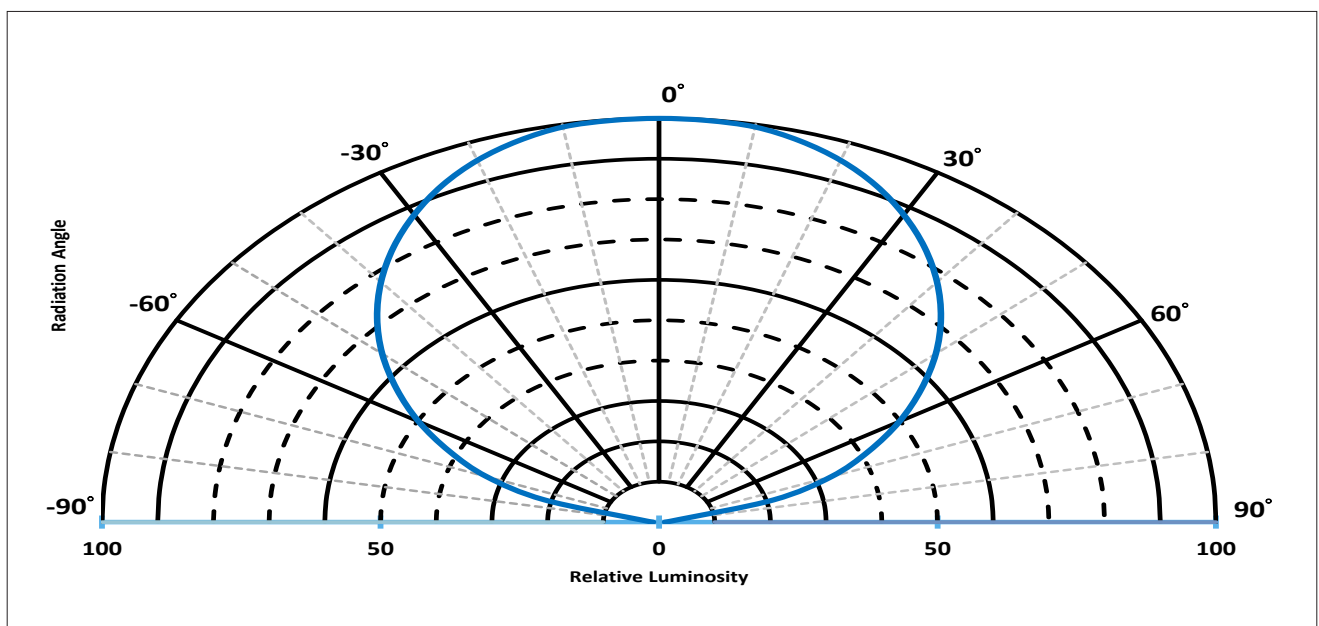

# Typical Color Spectrum

Figure 10: Typical Color Spectrum at 350mA, Tsp=85°C

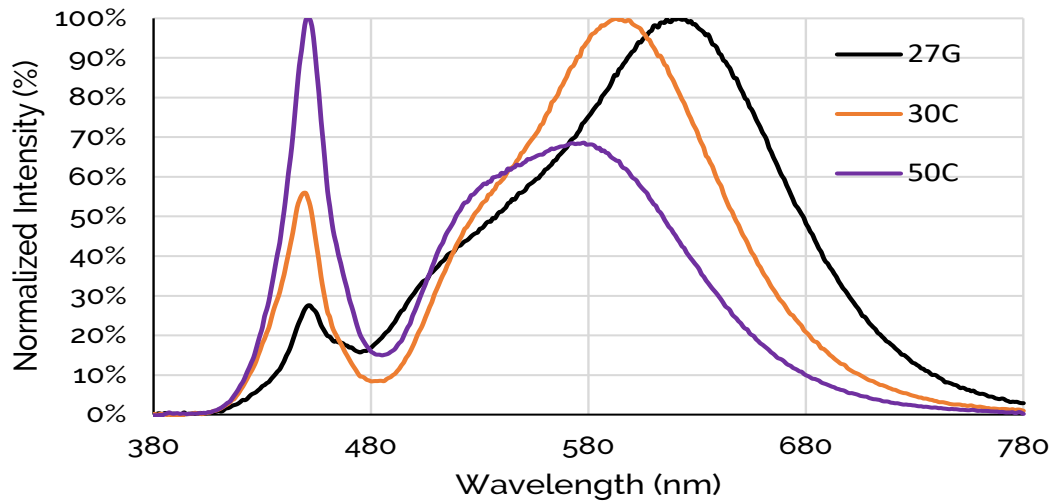


Notes for Figure 10:

1. Color spectra shown for warm white is 2700K and 90 CRI.
2. Color spectra shown for warm white is 3000K and 70 CRI.
3. Color spectra shown for cool white is 5000K and 70 CRI.

# Mechanical Dimensions


Figure 11: Drawing for CSP 1919

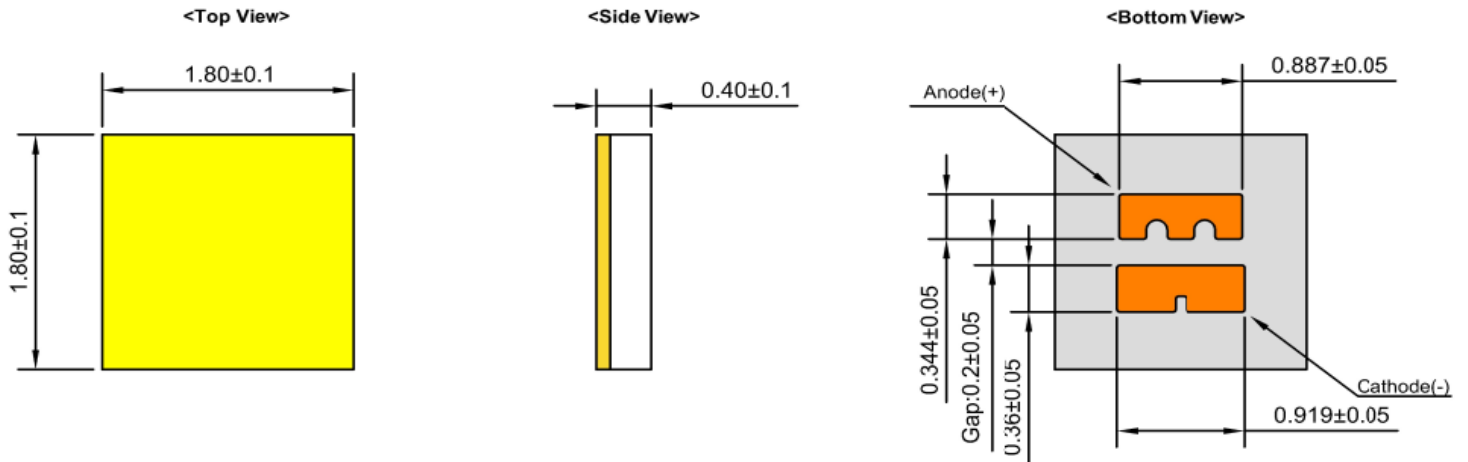

Notes for Figure 11:

1. Drawings are not to scale.
2. Drawing dimensions are in millimeters.
3. Unless otherwise specified, tolerances are  $\pm 0.10$ mm.
4. The optical center of the LED emitter is nominally defined by the mechanical center of the emitter. The light emitting surface (LES) is centered on the mechanical center of the LED emitter to a tolerance of  $\pm 0.2$  mm

## Recommended PCB Soldering Pad Pattern

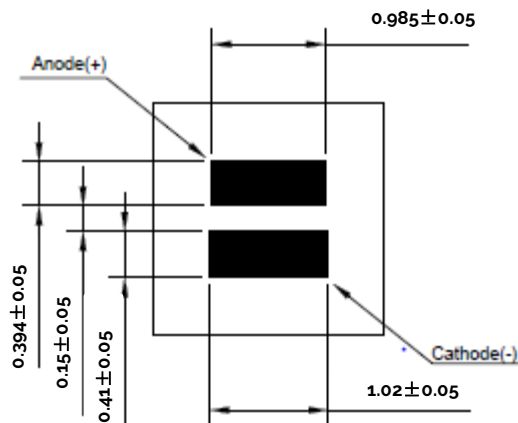

# Reliability

**Table 9: Reliability Test Items and Conditions**

No .	Items	Reference Standard	Test Conditions	Drive Current	Test Duration	Units Failed/Tested
1	Moisture Sensitivity Level	J-STD-020E	$T_{sld} = 260^{\circ}\text{C}$ , 10sec, Precondition: $85^{\circ}\text{C}$ , 60%RH, 168hr		3 reflows	0/22
2	Low Temperature Storage	JESD22-A119	$T_a = -40^{\circ}\text{C}$		1000 hours	0/22
3	High Temperature Storage	JESD22-A103D	$T_a = 125^{\circ}\text{C}$		1000 hours	0/22
4	Low Temperature Operating Life	JESD22-A108D	$T_a = -40^{\circ}\text{C}$	1200mA	1000 hours	0/22
5	Temperature Humidity Operating Life	JESD22-A101C	$T_{sp} = 85^{\circ}\text{C}$ , RH=85%	1200mA	1000 hours	0/22
6	High Temperature Operating Life	JESD22-A108D	$T_{sp} = 85^{\circ}\text{C}$	1200mA	1000 hours	0/22
7	Power Switching	IEC62717	$T_{sp} = 85^{\circ}\text{C}$ , ON 30s OFF 30s	1200mA	30000 Cycle	0/22
8	Thermal Shock	JESD22-A106B	$T_a = -40^{\circ}\text{C} \sim 125^{\circ}\text{C}$ ; Dwell : 15min; Transfer: 10sec		200 Cycle	0/22
9	Temperature Cycle	JESD22-A104E	$T_a = -40^{\circ}\text{C} \sim 125^{\circ}\text{C}$ ; Dwell at extreme temperature: 15min; Ramp rate < $105^{\circ}\text{C}/\text{min}$		200 Cycle	0/22
10	Electrostatic Discharge	JS-001-2012	HBM, 2kV, 15k $\Omega$ , 100pF, Alternately positive or negative			0/22
11	Vibration Test	JESD22-B103	10m/s <sup>2</sup> , 100-20000-100Hz 4 cycles,4min,eachX,Y,Z		4 Cycles	0/22

## Passing Criteria


Item	Symbol	Test Condition	Passing Criteria
Forward Voltage	Vf	1200mA	$\Delta V_f < 10\%$
Luminous Flux	Iv	1200mA	$\Delta I_v < 30\%$
Chromaticity Coordinates	(x, y)	1200mA	$\Delta u'v' < 0.007$

Notes for Table 9:

1. Test board: Aluminum board thickness -1.0mm, Copper layer thickness-70um.
2. Measurements are performed after allowing the LEDs to return to room temperature
3.  $T_{sld}$  : reflow soldering temperature;  $T_a$  : ambient temperature

# Reflowing Characteristics

Figure 12 : Reflow Profile

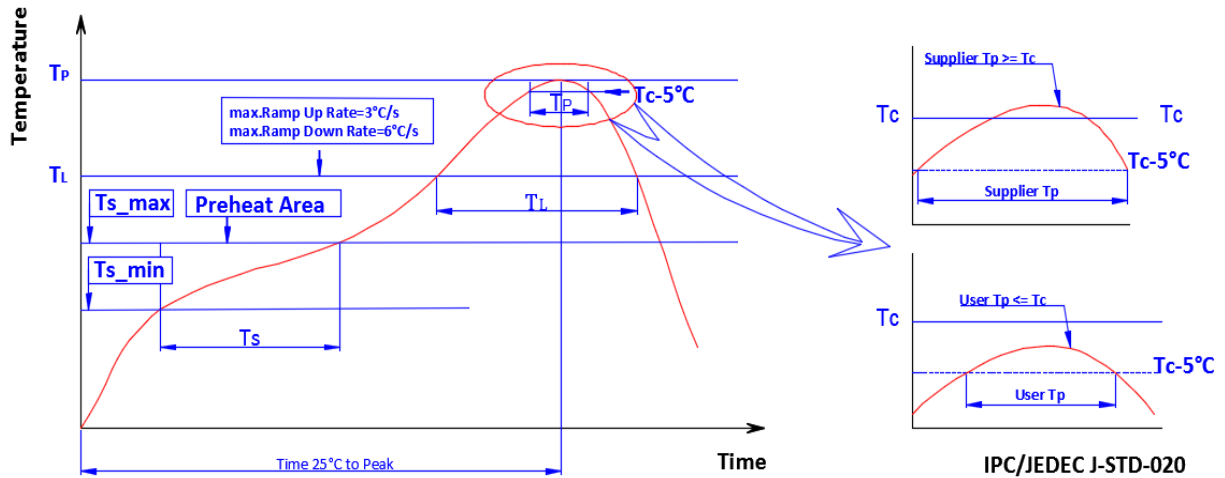


Profile Parameters	Lead-Free Solder SAC305
Average Ramp-Up Rate ( $T_{s\_max}$ to $T_p$ )	3°C/second max.
Preheat: Temperature Min ( $T_{s\_min}$ )	150°C
Preheat: Temperature Max ( $T_{s\_max}$ )	190°C
Preheat: Time ( $t_{s\_min}$ to $t_{s\_max}$ )	90-120 seconds
Liquidous Temperature ( $T_l$ )	217°C
Time Maintained Above Liquidous Temperature ( $T_L$ ): Time ( $t_l$ )	60-90 seconds
Peak/Classification Temperature ( $T_p$ )	250-255°C
Time Within 10°C of Actual Peak Temperature ( $T_p$ )	20-40 seconds
Ramp-Down Rate	6°C/second max
Time 25°C to Peak Temperature	8 minutes max.



# Packaging


**Figure 13: Reel Drawings**

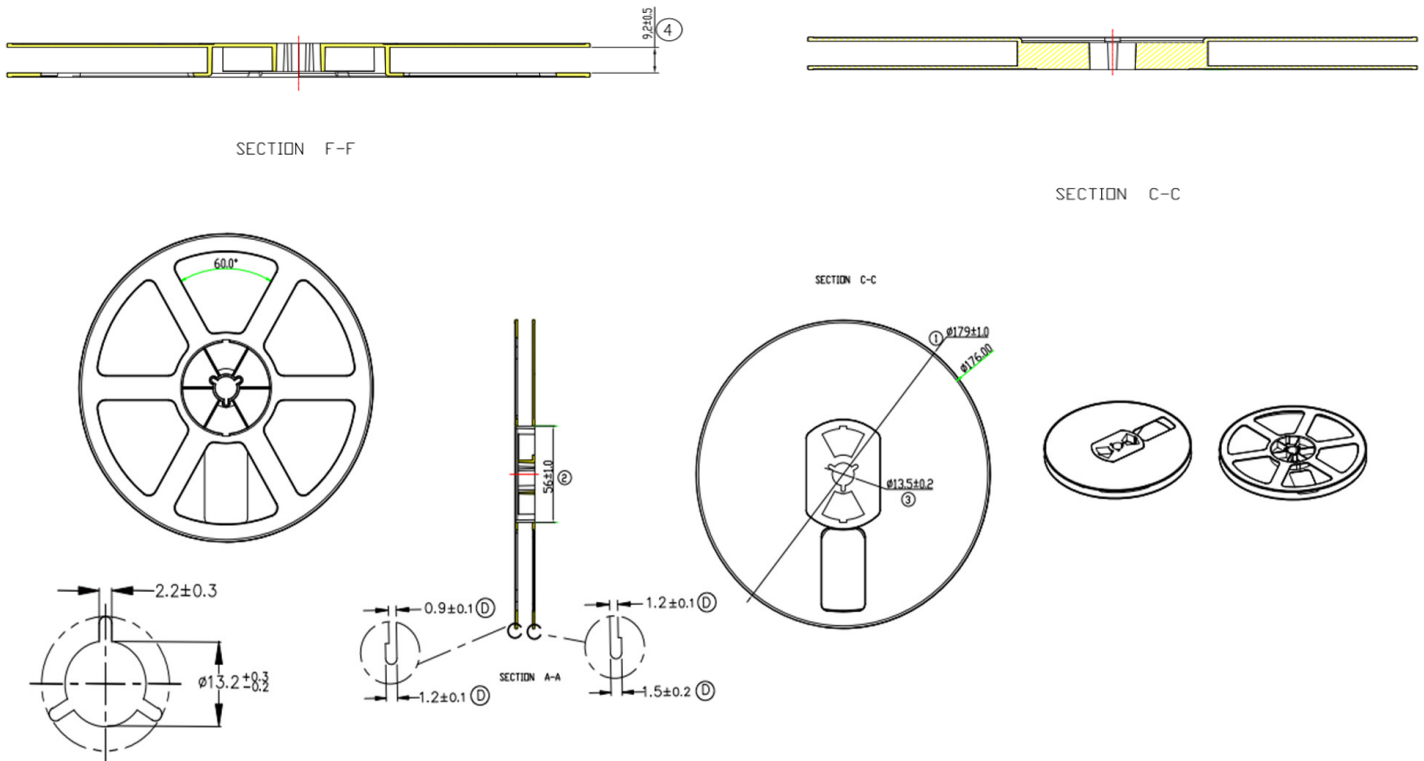

Note for Figure 13:

1. Drawings are not to scale. Drawing dimensions are in millimeters.

**Figure 14: Tape Drawings**

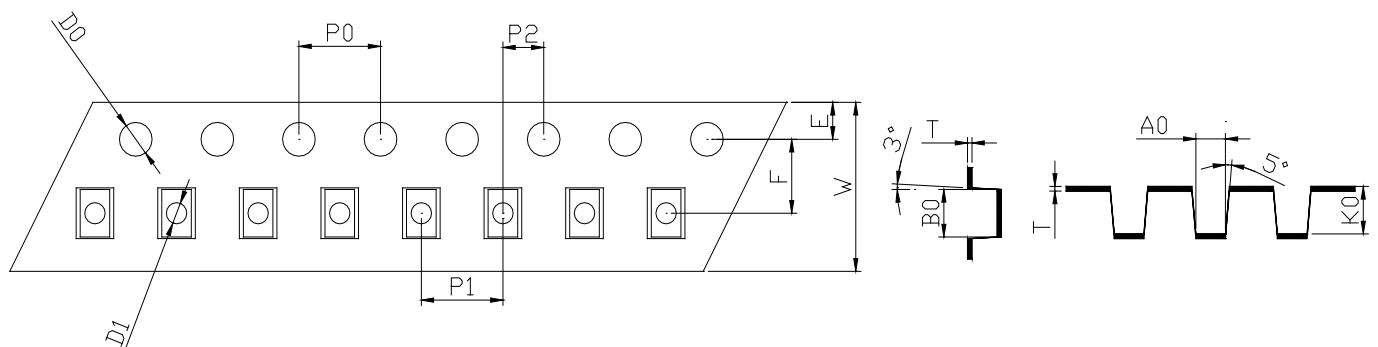


W	T	A0	B0	K0	D0	D1	E	F	P0	P1	P2	10P0
8.00±0.05	0.20±0.03	1.95±0.05	1.95±0.05	0.55±0.05	1.60±0.10	1.10±0.10	1.75±0.10	3.50±0.05	4.00±0.10	4.00±0.10	2.00±0.05	40.00±0.20

Note for Figure 14:

1. Drawings are not to scale. Drawing dimensions are in millimeters.

# Packaging

Figure 15: Reel Packaging Drawings

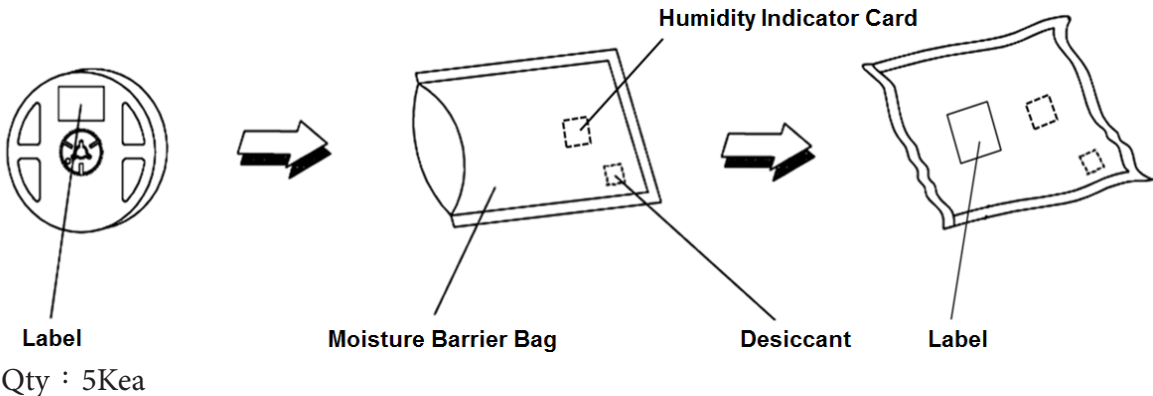

Note for Figure 15:  
1. Drawings are not to scale.

# Design Resources

## Optical Source Models

Please contact your Bridgelux sales representative for assistance.

## Precautions

### CAUTION: CHEMICAL EXPOSURE HAZARD

Exposure to some chemicals commonly used in luminaire manufacturing and assembly can cause damage to the CSP.

### CAUTION: EYE SAFETY

Eye safety classification for the use of Bridgelux CSP is in accordance with IEC specification 62471: Photobiological Safety of Lamps and Lamp Systems. Most Bridgelux CSPs are classified as Risk Group Exempt or Risk Group 1 in accordance with IEC specification 62471. However, the CSP LEDs will be classified as Risk Group 2 when operated at high power conditions with high ratio blue wavelength in the emission spectrum depending on characteristics. Please use appropriate precautions. It is important that employees working with LEDs are trained to use them safely.

### CAUTION: RISK OF BURN

Do not touch the CSP LES during operation. Allow the CSP to cool for a sufficient period of time before handling. The CSP may reach elevated temperatures such that could burn skin when touched.

## Disclaimers




### MINOR PRODUCT CHANGE POLICY

The rigorous qualification testing on products offered by Bridgelux provides performance assurance. Slight cosmetic changes that do not affect form, fit, or function may occur as Bridgelux continues product optimization.

### CAUTION: PICK AND PLACE

Recommend using Teflon material for nozzle. Sharp steel material must not be used as pick up tools.

## CAUTION



### STANDARD TEST CONDITIONS

Unless otherwise stated, LED emitter testing is performed at the nominal drive current.

# About Bridgelux: Bridging Light and Life™

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

**For more information about the company, please visit**  
**bridgelux.com**  
**twitter.com/Bridgelux**  
**facebook.com/Bridgelux**  
**WeChat ID: BridgeluxInChina**



**46410 Fremont Boulevard**  
**Fremont, CA 94538 U.S.A.**  
**Tel (925) 583-8400**  
**www.bridgelux.com**

© 2023 Bridgelux, Inc. All rights reserved. Product specifications are subject to change without notice. Bridgelux and the Bridgelux stylized logo design are registered trademarks of Bridgelux, Inc. All other trademarks are the property of their respective owners.

Bridgelux CSP 1919 Product Data Sheet DS961 Rev. B (09/2024)