

# BRIDGELUX BLUE POWER DIE

BXDA 15 mil x 30 mil

## PRODUCT DATA SHEET DS-C41

The Bridgelux family of blue power die enables high performance and cost effective solutions to serve solid state lighting market. This next generation flip chip technology delivers improved efficiency and performance to enable increased light output for a variety of lighting, signaling and display applications.


### Features

- Latest flip chip technology
- Allows for direct attach and reflow
- High drive current
- Low thermal resistance
- Low typical forward voltage
- Long operating life
- 450-460nm wavelength range

### Applications

- Digital Camera Flash
- Automotive Lighting
- General Illumination
- Architectural Lighting
- Directional Lighting
- Display Backlighting
- White LEDs

### LED Chip Diagram

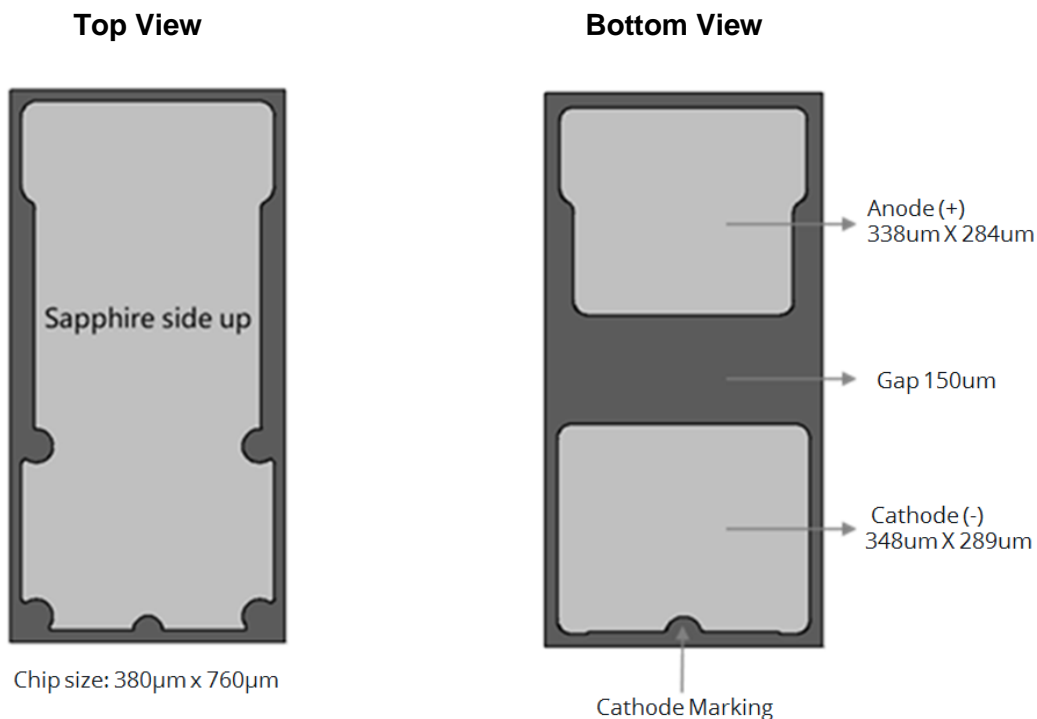

# BRIDGELUX BLUE POWER DIE

BXDA 15 mil x 30 mil

## Product Nomenclature

**B X D A 1530 X X X - Y - Z**

Where:

- BXDA: Designates product family
- 1530: Designates die size (15 mil x 30 mil)
- XXX: Designates dominant wavelength bin
- Y: Designates radiometric power bin
- Z: Designates forward voltage bin

## Part Numbering and Bin Definitions

Bridgelux LED chips are sorted into the brightness and dominant wavelength bins shown below at  $I_f = 120$  mA. Each blue tape contains die from only one brightness bin and one wavelength bin.

The forward voltage bins are 2.8-2.9 V (L1), 2.9-3.0 V (L2), 3.0-3.1 V (A1), 3.1-3.2 V (A2), 3.2-3.3 V (B1) and 3.3-3.4 V (B2). The maximum forward voltage ( $V_f \text{ max}$ ) = 3.4 V.

Dominant Wavelength	Power Bin C6 (160 – 170 mW)	Power Bin C7 (170 – 180 mW)
450 to 452.5nm	BXDA1530450-C6-z	BXDA1530450-C7-z
452.5 to 455nm	BXDA1530452-C6-z	BXDA1530452-C7-z
455 to 457.5nm	BXDA1530455-C6-z	BXDA1530455-C7-z
457.5 to 460nm	BXDA1530457-C6-z	BXDA1530457-C7-z

Dominant Wavelength	Power Bin C8 (180 – 190 mW)	Power Bin C9 (190 – 200 mW)
450 to 452.5nm	BXDA1530450-C8-z	BXDA1530450-C9-z
452.5 to 455nm	BXDA1530452-C8-z	BXDA1530452-C9-z
455 to 457.5nm	BXDA1530455-C8-z	BXDA1530455-C9-z
457.5 to 460nm	BXDA1530457-C8-z	BXDA1530457-C9-z

**Note:** z = "L1" for Vf bin of 2.8-2.9V; z = "L2" for Vf bin of 2.9-3.0V; z = "A1" for Vf bin of 3.0-3.1V; z = "A2" for Vf bin of 3.1-3.2V; z = "B1" for Vf bin of 3.2-3.3V; z = "B2" for Vf bin of 3.3-3.4V

# BRIDGELUX BLUE POWER DIE

BXDA 15 mil x 30 mil

## Mechanical Dimensions

Chip size	380(±25) μm × 760(±25) μm
Wafer thickness	140(±15) μm
Pad Gap	150(±10)μm
Anode Pad (Au)	338(±10)μm x 284(±10)μm
Cathode Pad (Au)	348(±10)μm x 289(±10)μm

## Absolute Maximum Ratings

Parameter	Symbol	Maximum Rating	Condition
DC Forward Current	$I_f$	240 mA <sup>1</sup>	$T_a=25^{\circ}\text{C}$
Forward Voltage	$V_f$	3.4 V	$I_f = 120 \text{ mA}$
Reverse voltage	$V_r$	-5V	$T_a=25^{\circ}\text{C}$
Reverse Current	$I_r$	1.0 μA	$V_r = -5 \text{ V}$
Junction Temperature	$T_j$	125°C	
Assembly Process Temp.		325°C for < 5 seconds	
Storage Conditions (chip on tape) <sup>6</sup>		0°C to +40°C ambient, RH < 65%	

### Notes:

1. Maximum drive current depends on junction temperature, die attach methods/materials, and lifetime requirements of the application.
2. Bridgelux LED chips are Class 1 ESD sensitive.
3. The typical spectra half-width of the BXDA1530 blue power die is < 25 nm.
4. Please consult the Bridgelux technical support team for information on how to optimize the light output of our chips in your package.
5. Brightness values are measured in an integrating sphere using silver plated single layer flip chip substrates without encapsulation.
6. Tapes should be stored in a vertical orientation, not horizontally stacked. Stacking of tapes can place excessive pressure on the bond pads of the LED.

## **BRIDGELUX BLUE POWER DIE**

BXDA 15 mil x 30 mil

### **Environmental Compliance**

Bridgelux is committed to providing environmentally friendly products to the solid state lighting market. Bridgelux BXDA1530 blue power die are compliant to the European Union directives on the restriction of hazardous substances in electronic equipment, namely the RoHS directive. Bridgelux will not intentionally add the following restricted materials to BXDA1530 die products: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE).

# BRIDGELUX BLUE POWER DIE

BXDA 15 mil x 30 mil

## Performance vs. Current

The following curves represent typical performance of the BXDA1530 blue power die. Actual performance will vary slightly for different power, dominant wavelength and Vf bins.

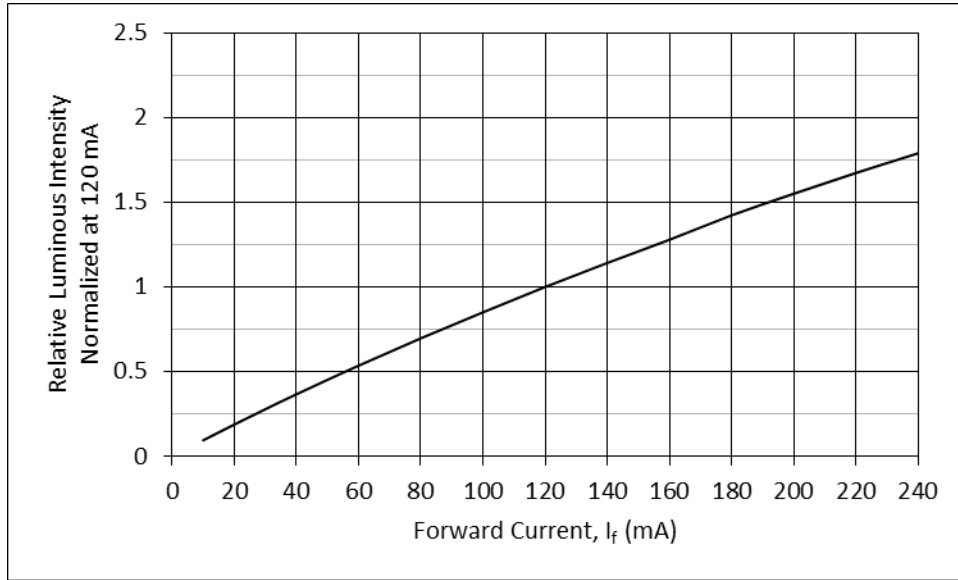


Figure 1: Relative Luminous Intensity vs. Forward Current ( $T_j = 25^\circ\text{C}$ )

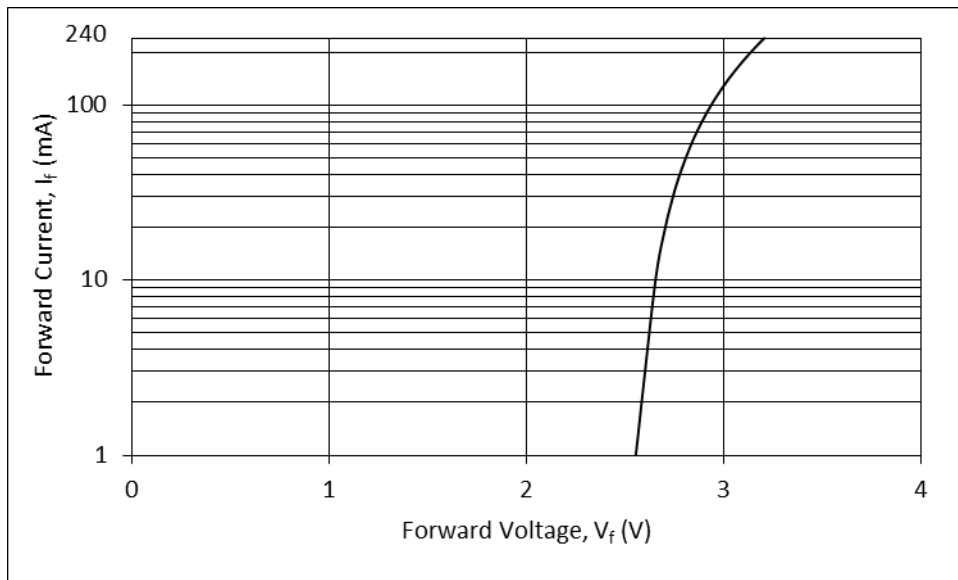


Figure 2: Forward Current vs. Forward Voltage ( $T_j = 25^\circ\text{C}$ )

# BRIDGELUX BLUE POWER DIE

BXDA 15 mil x 30 mil

## Performance vs. Junction Temperature

The following curves represent typical performance of the BXDA1530 blue power die. Actual performance will vary slightly for different power, dominant wavelength and Vf bins.

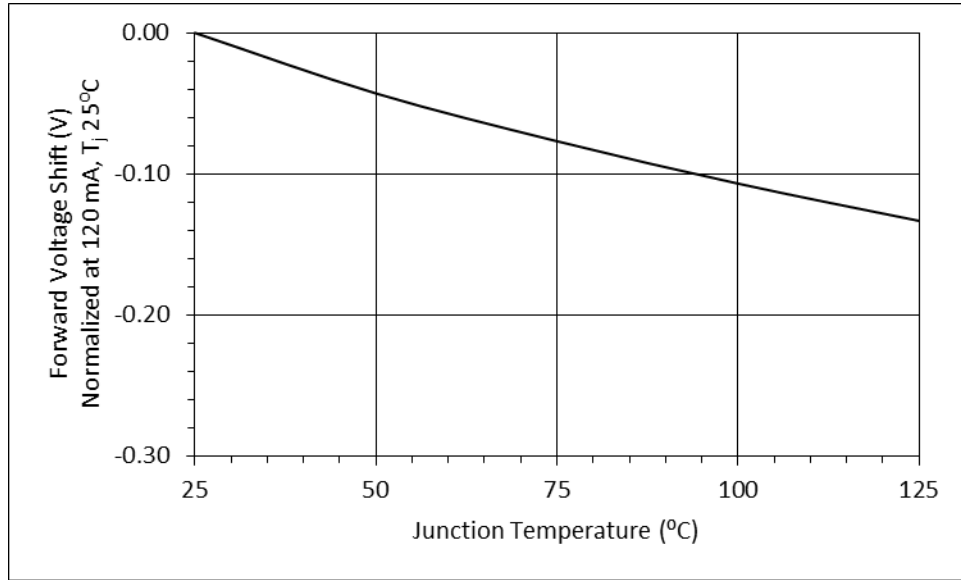


Figure 3: Forward Voltage Shift vs. Junction Temperature

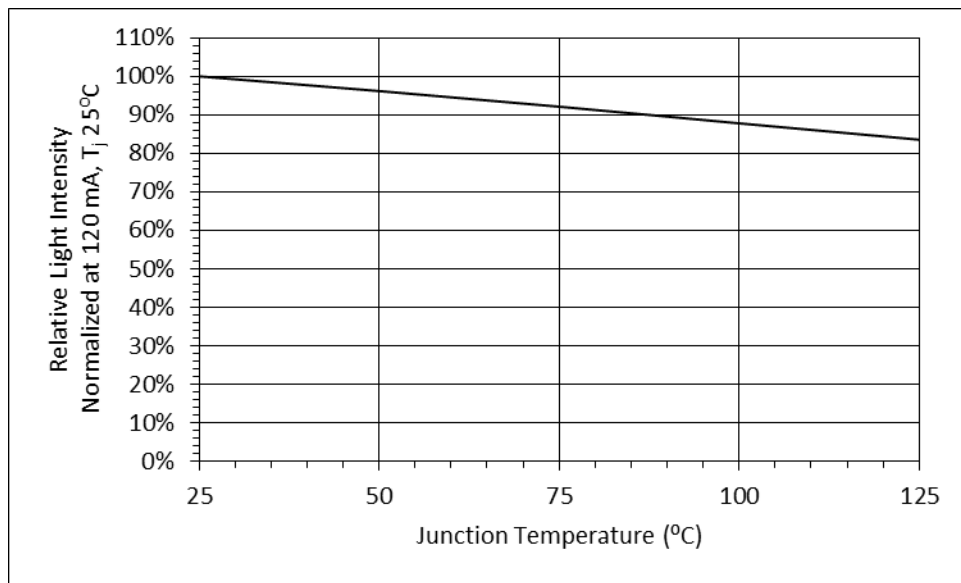


Figure 4: Relative Light Intensity vs. Junction Temperature

# BRIDGELUX BLUE POWER DIE

BXDA 15 mil x 30 mil

## Wavelength Shift

The following curves represent typical performance of the BXDA1530 blue power die. Actual performance will vary slightly for different power, dominant wavelength and Vf bins.

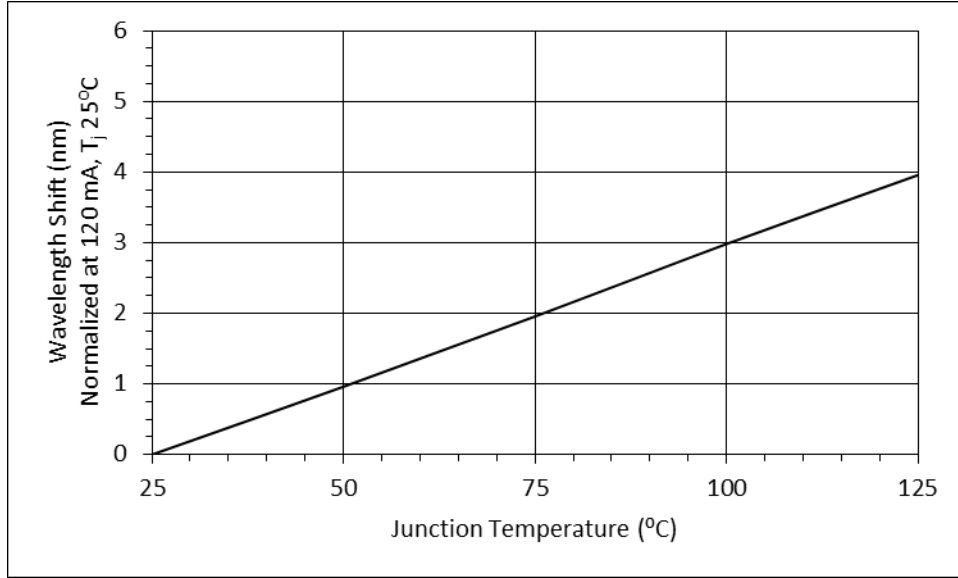


Figure 5: Wavelength Shift vs. Junction Temperature

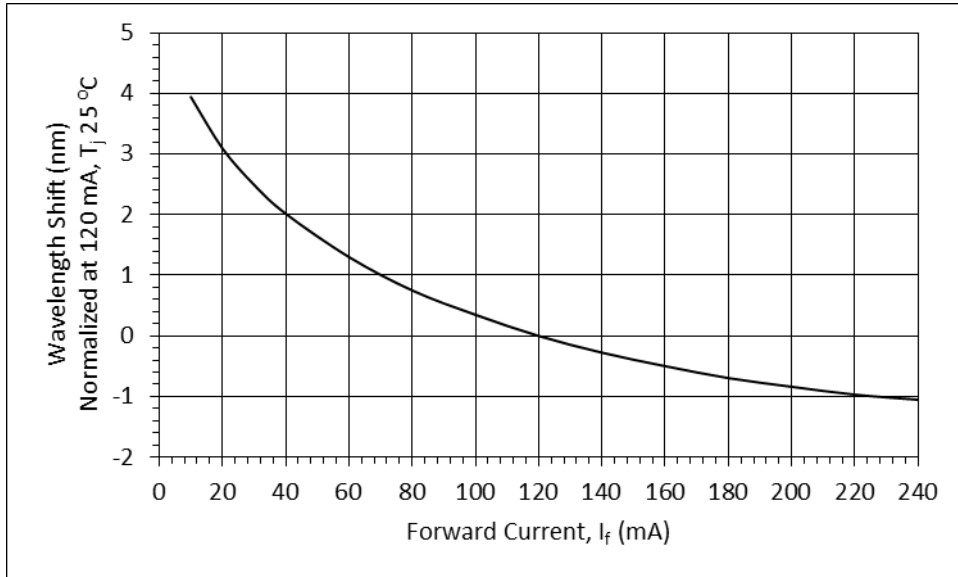


Figure 6: Wavelength Shift vs. Forward Current

# BRIDGELUX BLUE POWER DIE

BXDA 15 mil x 30 mil

## Current De-rating Curves

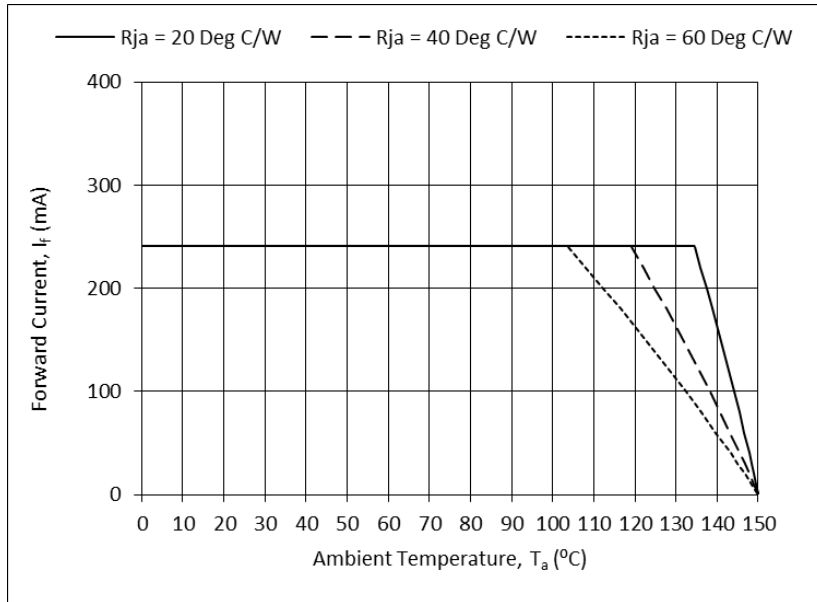


Figure 7: Current Derating Curve vs. Ambient Temperature (derating based on  $T_j$  max 125°C)



## **BRIDGELUX BLUE POWER DIE**

BXDA 15 mil x 30 mil

### About Bridgelux

At Bridgelux, we help companies, industries and people experience the power and possibility of light. Since 2002, we've designed LED solutions that are high performing, energy efficient, cost effective and easy to integrate. Our focus is on light's impact on human behavior, delivering products that create better environments, experiences and returns—both experiential and financial. And our patented technology drives new platforms for commercial and industrial luminaires.

For more information about the company, please visit

[bridgelux.com](http://bridgelux.com)

[twitter.com/Bridgelux](https://twitter.com/Bridgelux)

[facebook.com/Bridgelux](https://facebook.com/Bridgelux)

[linkedin.com/company/Bridgelux-inc-\\_2](https://linkedin.com/company/Bridgelux-inc-_2)

WeChat ID: BridgeluxInChina

© 2018 Bridgelux, Inc. All rights reserved. Product specifications are subject to change without notice.