


EB Series™ Gen 3

Bridgelux Differentiation

- It's in our DNA to solve customers' problems
- 15+ years of driving LED industry transformation
- Vertically integrated global supply chain
- Fully customizable platforms, including board shapes, LED layouts, color points and CRI options

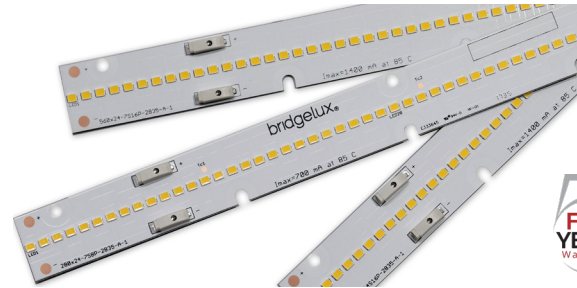

Features & Benefits

- High efficacy of up to 200 lm/W (nominal)
- Available in 80 CRI, 90 CRI, and Thrive (97 CRI full spectrum)
- Available in a color temperatures from 2700K to 6500K
- High Output (HO) modules with 2x the nominal flux
- Wide lumen range with 2x overdrive capability
- 1120mm HO module delivers up to 20k lumens at 180 lm/W
- Achieve over 200 lm/W by under-driving
- Long lifetime (L80, B50 > 50,000 hours)
- Reliable use at elevated currents for greater design flexibility
- Easy installation using Zhaga mounting holes and connectors

Module Length	CCT Range	CRI	Flux (lm)	Drive Current (mA)	Voltage (V)	Power (W)	Efficacy (lm/W)	SDCM
280 mm	2700K-6500K	80	1340	350	19.1	6.7	200	3
		90	1100				164	
		Thrive (97)	950		138			
280 mm High Output		80	2610	700	19.2	13.4	194	
		90	2225				166	
560 mm		2700K-6500K	80	2675	700	19.1	13.4	
	90		2195	164				
	Thrive (97)		1900	138				
560 mm High Output	80		5220	1400	19.2	26.9	194	
	90		4450				166	
1120 mm	2700K-6500K		80	5350	700	38.3	26.8	200
		90	4390	164				
		Thrive (97)	3800	138				
1120 mm High Output		80	10440	1400	38.4	53.8	194	
		90	8900				166	

* All measurements are at 4000K, T_c=25°C

© 2020 Bridgelux, Inc. All rights reserved. Product specifications are subject to change without notice. Bridgelux and the Bridgelux stylized logo design are registered trademarks, and EB Series is a trademark, of Bridgelux, Inc. All other trademarks are the property of their respective owners. The information contained in this sell sheet is not a substitute for the information provided in the actual product data sheets.

Bridgelux EB Series Gen 3 Sell Sheet Rev. D (05/2020)

For more information:
[bridgelux.com/products/eb-series](https://www.bridgelux.com/products/eb-series)

